



Version E | Series E03 | "easy" design, split crossbar along the outer radius



Part No.	Bi	Ba*	R Available bend radii	Weight
Version E	[mm]	[mm]	[mm]	[kg/m]
E03.05.R.0 ¹⁾	5	8.7	010 012 015 018 028	≈ 0.03
E03.07.R.0 ²⁾	7	10.7	010 012 015 018 028	≈ 0.04
E03.10.R.0 ²⁾	10	13.7	010 012 015 018 028	≈ 0.05

1) Crossbars do not overlap. Gap = 1mm / 2) Crossbars do not overlap. Gap = 2mm

Ba*: pin dimension approx. 0.1 - 0.3mm wider.


Complete Part No. with required radius (R). Example: E03.05.028.0

Installation dimensions

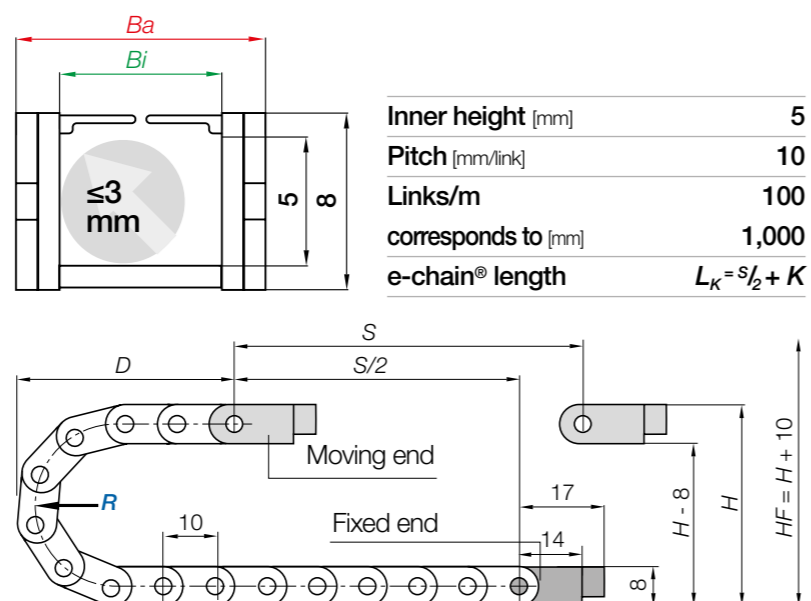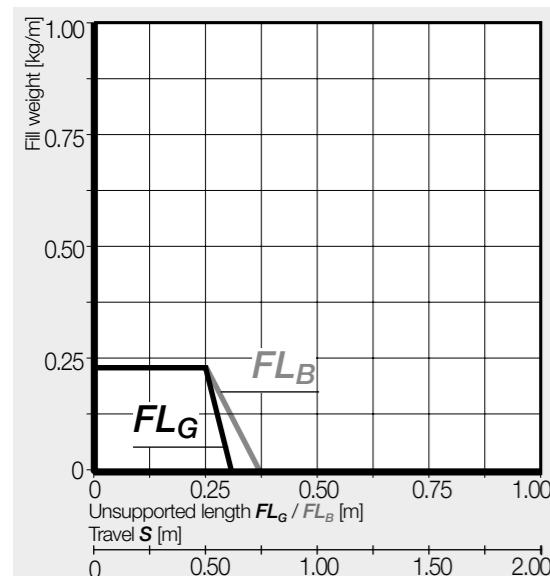


R	010	012	015	018	028
H	28	32	38	44	64
D	29	31	34	37	47
K	55	60	70	80	110

The required clearance height: $H_F = H + 10\text{mm}$ (with 0.1kg/m fill weight)

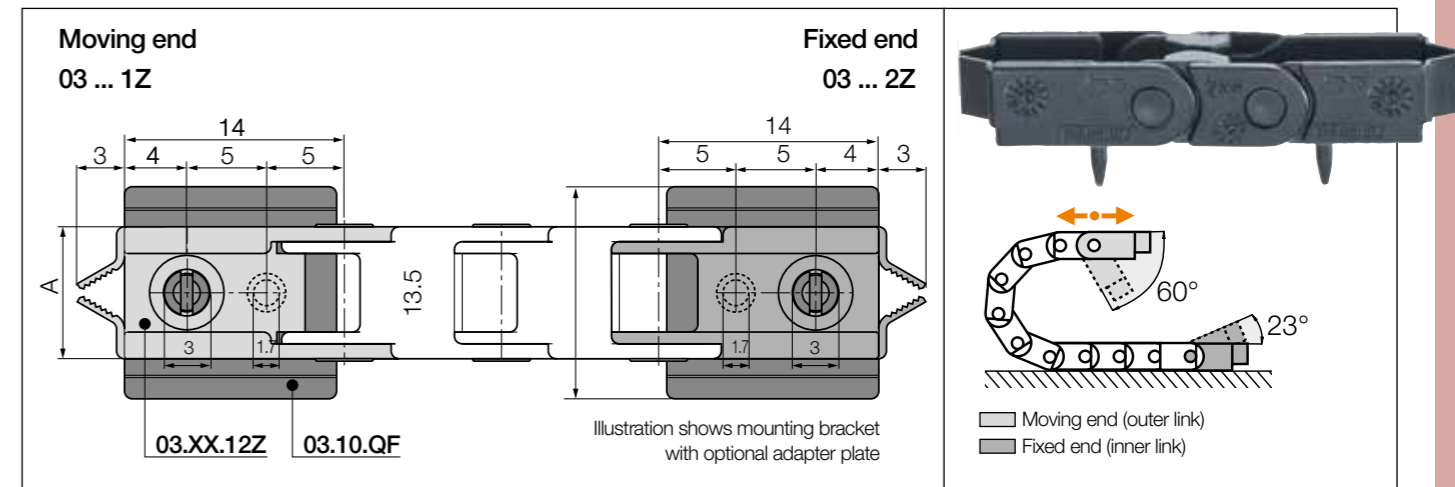


Width index	Part No. full set	A
		[mm]
05.	03.05.12Z	8.4
07.	03.07.12Z	10.4
10.	03.10.12Z	13.4

Material mounting bracket - igumid G, temperature: -40° up to +120°C, VDE 0304 IIC UL94-HB

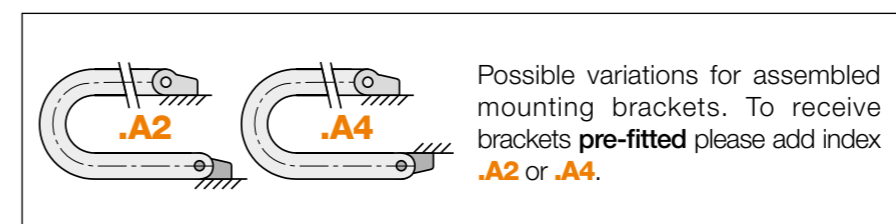

03.05.12Z.A2 Order example
 .A... to indicate option with brackets pre-fitted
 Full set
 Series

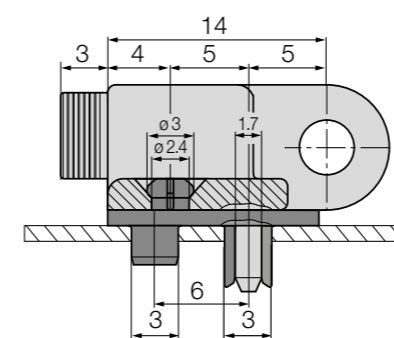

Adapter plate for rapid installation for all sizes, Part No. 03.10.QF

The adapter has scored lines so that it can be adapted to the respective e-chain® width. The adapter plate is not always necessary when attaching the mounting brackets as they can also be screwed on without the adapter plate.



Optional adapter plate