


Flow Transmitter VHZ

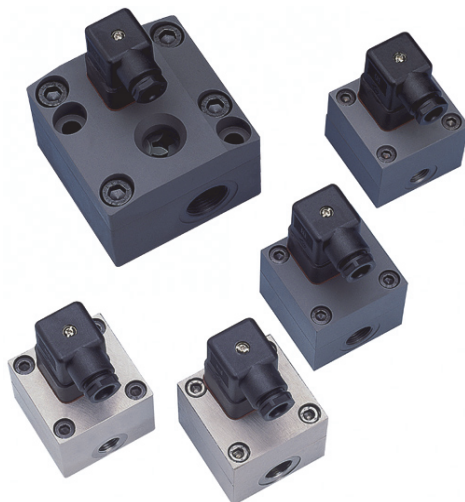

- Ideally suited for viscous media (oils)
- Light and compact construction in an aluminium housing
- For cost-sensitive applications

Characteristics

The VHZ gearwheel flow meter measures the flow by a volumetric principle, in which a pair of gearwheels is moved proportional to the flow rate. The movement of the gearwheels is measured through the enclosing housing wall by a sensor. The devices are suitable for viscous, fluid, self-lubricating media, as well as for aqueous fluids such as soaps, pasts, emulsions etc. which have a non-abrasive character. Because of the volumetric functioning principle, the devices are almost completely independent of viscosity.

A push-pull transistor output, an A / B output or a two wire output are available as signal output.

The push-pull output can as desired be connected as a PNP or an NPN output, and emits a frequency proportional to the flow rate.

The A / B output consists of two push-pull outputs, whose signals are phase-shifted by 90°. This makes it possible to determine the direction of flow using the bidirectionally driven sensor. The 2 wire model represents the pulse as two different currents, and has the advantage of reduced wiring effort.

Alternatively, it is possible to use add-on electronics with signal processing, in the series OMNI, FLEX and LABO.

Technical data

| | | |
|---------------------------------|---|---|
| Sensor | gearwheel volumeter | |
| Nominal width | DN 8..25 | |
| Process connection | female thread G 1/4..G 1 | |
| Metering ranges | 0.02..150 l/min for details, see table "Ranges" | |
| Measurement accuracy | ±3 % of the measured value in the specified metering range (measured at 20 mm²/s) | |
| Repeatability | ±0,3 % | |
| Medium temperature | -25..+80 °C | |
| Ambient temperature | -20..+70 °C | |
| Pressure resistance | see table "Pressure resistance and Weight" | |
| Pressure loss | see upstream page "Function and benefits - volumetric, gearwheel" | |
| Materials medium-contact | see table "Materials" | |
| 3 wire or A / B-output | Supply voltage | 10..30 V DC |
| | Current consumption | approx. 20 mA without load |
| | Signal output | transistor output "push-pull" (resistant to short circuits and polarity reversal) I _{out} = 100 mA max. |
| 2 wire | Supply voltage | 4.5..24 V DC |
| | Signal output | Low: 7 mA High: 14 mA |
| | Reversed polarity protected | yes |
| Electrical connection | optional plug DIN 43650-A / ISO 4400 or for round plug connector M12x1, 4-pole | |
| Ingress protection | IP 65 | |
| Weight | see table "Pressure resistance and weight" | |
| Conformity | CE | |

Pressure resistance and weight

| G | Types | PN bar | Housing material | Weight kg |
|-------|------------|--------|-------------------|-----------|
| G 1/4 | VHZ-008GA | 200 | Aluminium | 0.5 |
| G 1/4 | VHZ-008GK | 160 | Stainless steel | 1.5 |
| G 3/8 | VHZ-010GA | 160 | Aluminium | 0.5 |
| G 3/8 | VHZ-010GK | 160 | Stainless steel | 1.5 |
| G 3/4 | VHZ-020GA | 160 | Aluminium | 1.6 |
| G 3/4 | VHZO-020GA | 100 | Aluminium / glass | 1.6 |
| G 1 | VHZ-025GA | 80 | Aluminium | 6.3 |

ZUBOVÝ PRŮTOKOMĚR VHZ



HENNlich

MERES

Ranges

| Metering range l/min | Types | Pulse volume cm ³ | Frequency Hz at Q _{max} |
|-------------------------|------------|---------------------------------|-------------------------------------|
| 0.02.. 2 | VHZ-008 | 0.04 | 833 |
| 0.10.. 6 | VHZ-010 | 0.20 | 500 |
| 0.50.. 50 | VHZ(O)-020 | 2.00 | 417 |
| 3.00.. 150 | VHZ-025 | 5.22 | 479 |

Materials


| | VHZ-008GA | VHZ-010..025GA | VHZ-008GK | VHZ-010..025GK |
|---------------------|--|------------------------|--|------------------------|
| Housing | Aluminium | Al anodised | stainless steel 1.4404 | stainless steel 1.4404 |
| gear-wheel and Axis | stainless steel 1.4462 | stainless steel 1.4462 | stainless steel 1.4462 | stainless steel 1.4462 |
| Bearing | Stainless steel ball bearings 1.4037 / 1.4016 / PVD coated | Igildur X | stainless steel 1.4037 / 1.4016 / PVD-coated | Igildur X |
| Seal | FKM | FKM | FKM | FKM |
| Sight glass | | Glass (only with VHZO) | | |

Wiring


Before the electrical installation, it must be ensured that the supply voltage complies with the data sheet.
The use of shielded cabling is recommended.

Push-pull output



with round plug connector M12x1

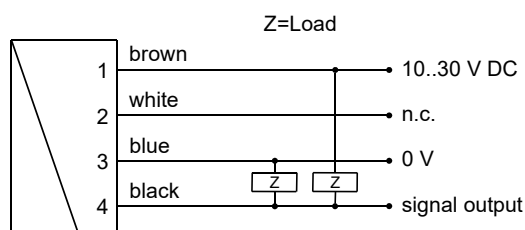

Connection example: PNP NPN





with plug as per DIN 43650-A / ISO 4400

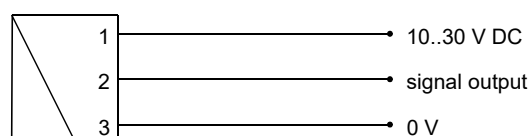



A / B output

only with 4-pole round plug connector


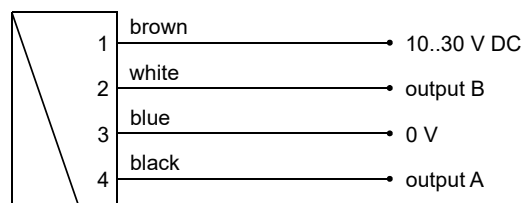


2 wire model

with plug as per DIN 43650-A / ISO 4400

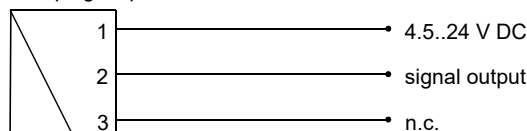


with round plug connector M12x1

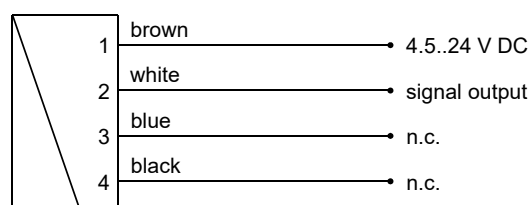


ZUBOVÝ PRŮTOKOMĚŘ VHZ

Dimensions


VHZ-008

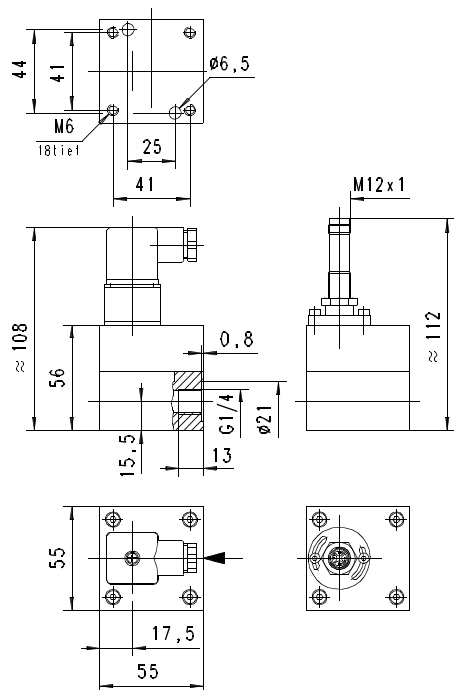


VHZ-010

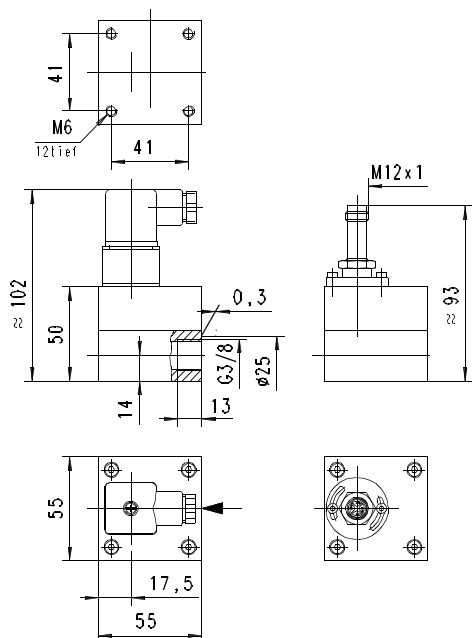

VHZ-020

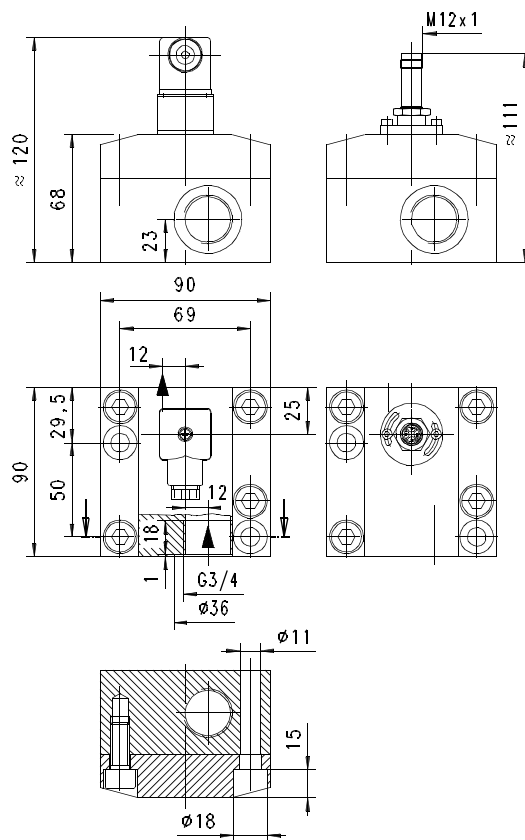

VHZ-025

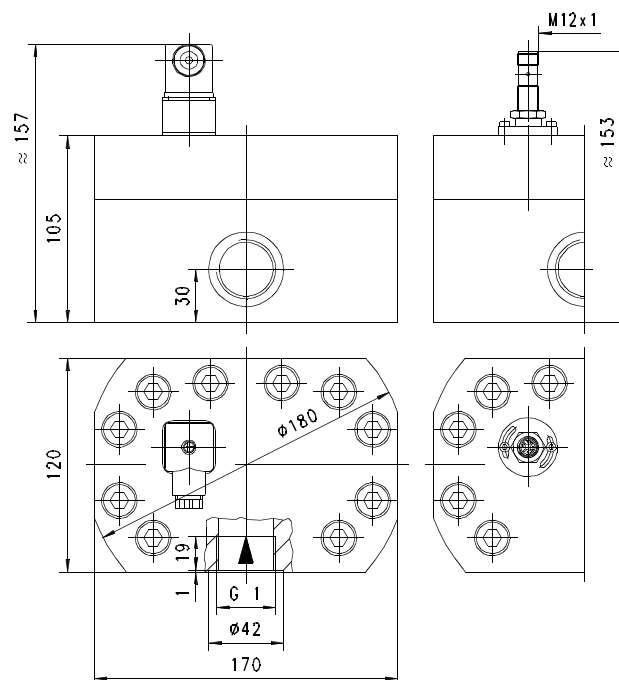

ZUBOVÝ PRŮTOKOMĚR VHZ



HENNLICH

MERES

Handling and Operation

Installation

The VHZ flow measurement device can be installed anywhere in the pipework system. A run-in section is not required. The direction of flow may be freely chosen. It should be ensured that no dirt particles (thread cutting swarf!) can get into the flow space, as this could cause the blockage of the gearwheels. It may therefore be necessary to install filters upstream of the flow measurement device (mesh size 30 µm).

Ordering code

VHZ- 1. 2. 3. 4. 5. 6. 7.

VHZ-

○=Option

| 1. Sight glass | | | | | | | |
|--------------------------|--|--|---|---|---|---|---|
| - | no sight glass | | | | | | |
| O- | with sight glass | | | | | | |
| 2. Nominal width | | | | | | | |
| 008 | DN 8 - G 1/4 | | | | | | • |
| 010 | DN 10 - G 3/8 | | | | | | • |
| 020 | DN 20 - G 3/4 | | | | | • | • |
| 025 | DN 25 - G 1 | | | | | | • |
| 3. Process connection | | | | | | | |
| G | female thread | | | | | | |
| 4. Body material | | | | | | | |
| A | aluminium | | • | • | • | • | |
| K | ○ stainless steel | | | | | • | • |
| 5. Ranges | | | | | | | |
| 002 | 0.02.. 2 l/min | | | | | | • |
| 006 | 0.10.. 6 l/min | | | | | • | |
| 050 | 0.50.. 50 l/min | | | | • | | |
| 150 | 3.00..150 l/min | | • | | | | |
| 6. Signal output | | | | | | | |
| M | push-pull transistor output | | • | • | • | • | |
| A | ○ A / B output (2 x push-pull) | | • | • | • | | |
| Z | ○ 2 wire | | • | • | • | • | |
| 7. Electrical connection | | | | | | | |
| B | plug DIN 43650A / ISO 4400 | | | | | | |
| S | ○ for round plug connector M12x1, 4-pole | | | | | | |

Attention: The A / B output requires the use of a 4-pole round plug connector!

Options

- Highest temperature 120 °C

Accessories

- Cable/round plug connector (KB...) see additional information "Accessories"
- Remote flow display OMNI-TA