




Type sheet


Vacuum relief valve KITO® VS/o cont. ...



Application

As end-of-line device, for venting of tank installations for ventilation and to prevent inadmissible vacuum. Usually installed on top of a tank, if applicable in conjunction with a pressure relief valve on a common connecting pipe. Valve is not explosion-proof, thus cannot be used for flammable media.

Dimensions (mm) and settings (mbar)

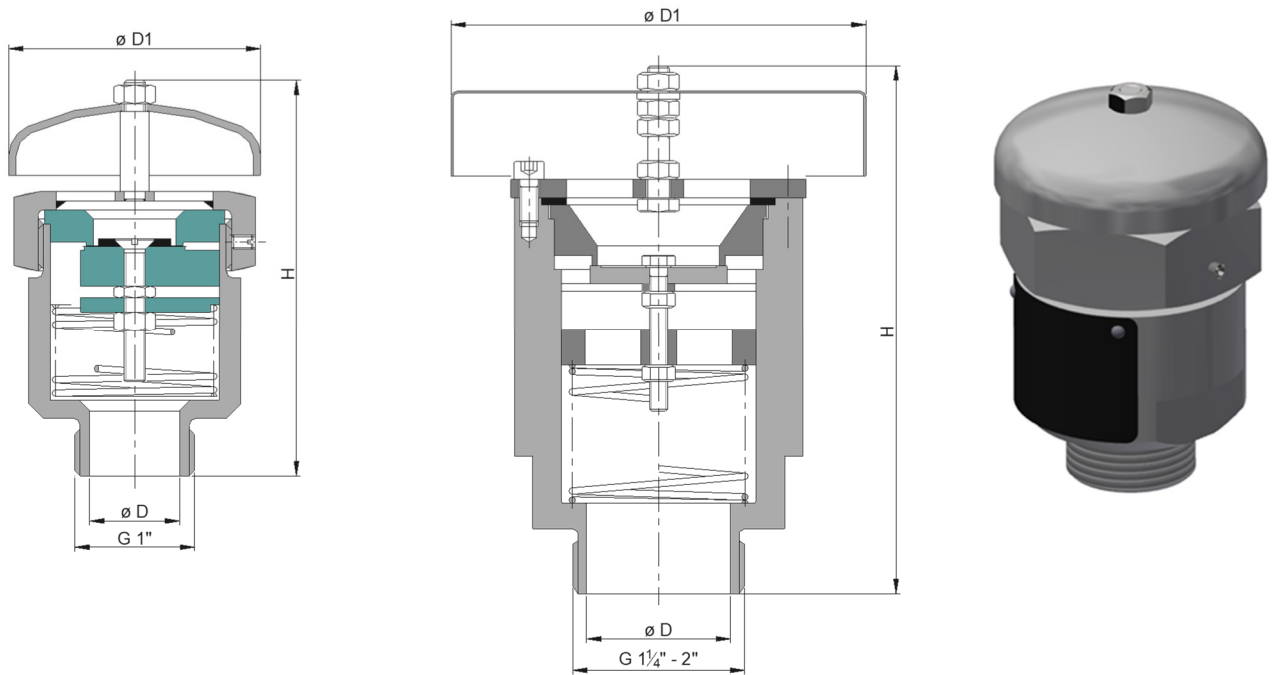

size	D	D1	H	kg	setting
G 1"	25	70	110	1	5 - 210
G 1 1/4"	32	115	145	3	
G 1 1/2"	40				
G 2"					

Weight refers to the standard design

Design

	size G 1"	size G 1 1/4", G 1 1/2", G 2"
housing		stainless steel mat. no. 1.4571
valve seat / valve pallet	PTFE	stainless steel mat. no. 1.4571
sealing	FEP	PTFE
compression spring		stainless steel mat. no. 1.4571
weather hood	stainless steel mat. no. 1.4301	stainless steel mat. no. 1.4571
connection		threaded format

Example for order


KITO® VS/o cont. 2"

(design with threaded connection G 2")

Without EC certificate and CE-marking

Type sheet

Vacuum relief valve

KITO® VS/o cont. ...

Performance curves

The flow capacity V refers to a density of air with $\rho = 1.29 \text{ kg/m}^3$. The flow capacity for gases with different densities can be calculated sufficiently accurate by the following approximation equation:

$$\dot{V}_{40\%} = \dot{V}_b \cdot \sqrt{\frac{\rho_b}{1.29}} \quad \text{or} \quad \dot{V}_b = \dot{V}_{40\%} \cdot \sqrt{\frac{1.29}{\rho_b}}$$

