


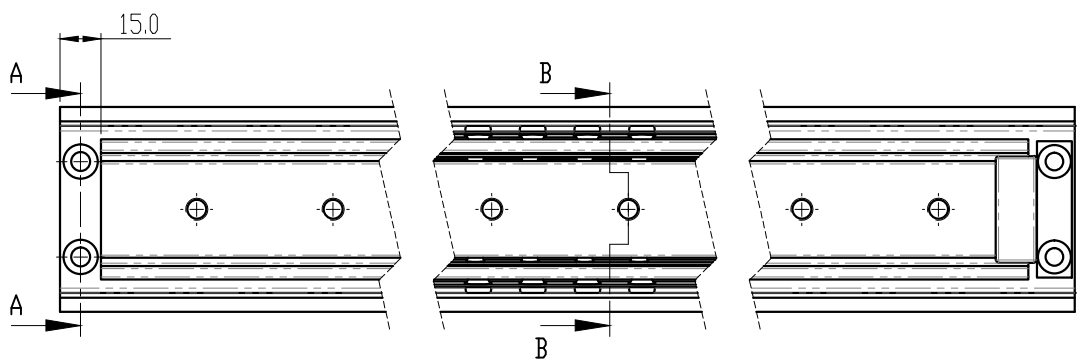
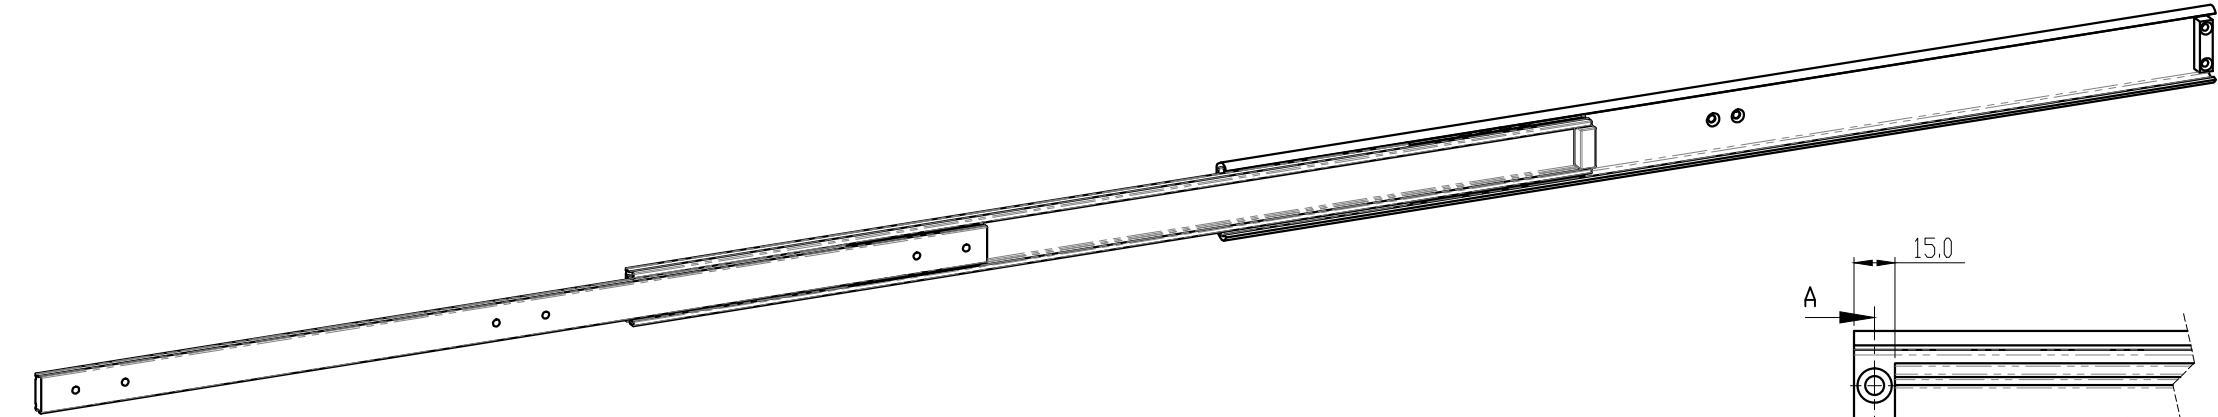
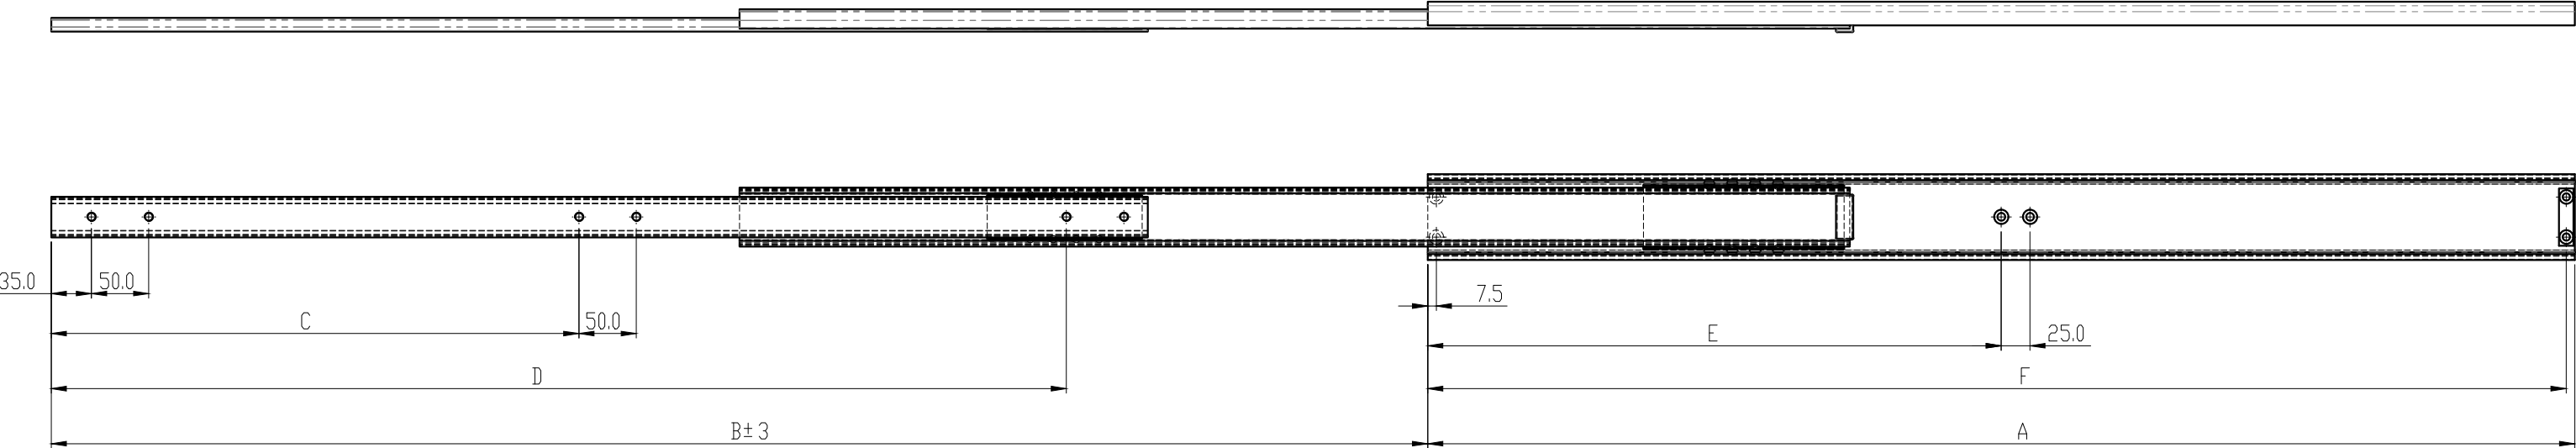





SECTION A-A  
SCALE 1 : 1

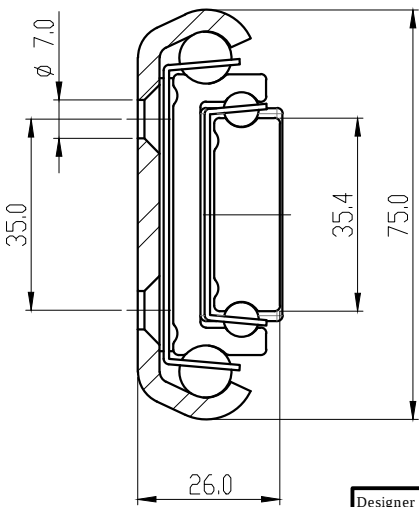

SECTION B-B  
SCALE 1 : 1

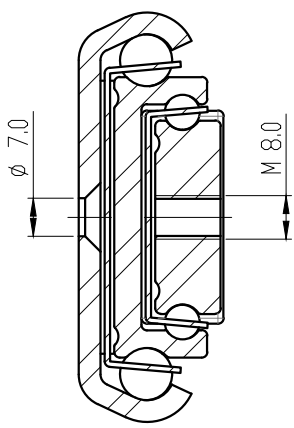

| Configuration Table |                         |                      |                    |             |      |     |        |
|---------------------|-------------------------|----------------------|--------------------|-------------|------|-----|--------|
| ART. NO             | Installation Length "A" | Extension Length "B" | Load Per Pair (kg) | Drill Table |      |     |        |
|                     |                         |                      |                    | "C"         | "D"  | "E" | "F"    |
| TR13875S31          | 300                     | 360                  | 324                |             | 185  |     | 292.5  |
| TR13875S32          | 350                     | 420                  | 342                |             | 235  |     | 342.5  |
| TR13875S33          | 400                     | 480                  | 351                |             | 285  |     | 392.5  |
| TR13875S34          | 450                     | 540                  | 360                |             | 335  |     | 442.5  |
| TR13875S35          | 500                     | 600                  | 369                |             | 285  |     | 492.5  |
| TR13875S36          | 550                     | 660                  | 378                | 235         | 435  | 275 | 542.5  |
| TR13875S37          | 600                     | 720                  | 387                | 260         | 485  | 300 | 592.5  |
| TR13875S38          | 650                     | 780                  | 378                | 285         | 535  | 325 | 642.5  |
| TR13875S39          | 700                     | 840                  | 369                | 310         | 585  | 350 | 692.5  |
| TR13875S40          | 750                     | 900                  | 360                | 335         | 635  | 375 | 742.5  |
| TR13875S41          | 800                     | 960                  | 351                | 360         | 685  | 400 | 792.5  |
| TR13875S42          | 850                     | 1020                 | 342                | 385         | 735  | 425 | 842.5  |
| TR13875S43          | 900                     | 1080                 | 333                | 410         | 785  | 450 | 892.5  |
| TR13875S44          | 950                     | 1140                 | 324                | 435         | 835  | 475 | 942.5  |
| TR13875S45          | 1000                    | 1200                 | 315                | 460         | 885  | 500 | 992.5  |
| TR13875S47          | 1100                    | 1320                 | 288                | 510         | 985  | 550 | 1092.5 |
| TR13875S49          | 1200                    | 1440                 | 270                | 560         | 1085 | 600 | 1192.5 |
| TR13875S51          | 1300                    | 1560                 | 252                | 610         | 1185 | 650 | 1292.5 |
| TR13875S53          | 1400                    | 1680                 | 234                | 660         | 1285 | 700 | 1392.5 |
| TR13875S55          | 1500                    | 1800                 | 216                | 710         | 1385 | 750 | 1492.5 |
|                     |                         |                      |                    |             |      |     |        |

|                                                                                                                                       |                                                                                       |                     |  |                                                                                                                 |                        |      |           |
|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------|--|-----------------------------------------------------------------------------------------------------------------|------------------------|------|-----------|
| Designer                                                                                                                              |                                                                                       | Gen.Tol.Dim. ± 0.5  |  | Third angle projection<br> | Material MILD STEEL    |      |           |
| Date 16-09-2014                                                                                                                       |                                                                                       | Gen.Tol.Angle ± 0.5 |  |                                                                                                                 | Treatment ZINCPLATE    |      |           |
| Approver                                                                                                                              |                                                                                       | Gen.Roughness Ra    |  |                                                                                                                 | Draw type              |      | Doc.No.   |
| Date                                                                                                                                  |                                                                                       | Units mm/deg.       |  |                                                                                                                 | Scale                  | Type | Model No. |
| Description<br>TR7526-120                                                                                                             |                                                                                       |                     |  |                                                                                                                 |                        |      |           |
| Format                                                                                                                                |  |                     |  |                                                                                                                 | Item No.<br>TR7526-120 |      | Revision  |
| © THOMAS REGOUT INTERNATIONAL BV, Industrieweg 40, 6219 NR, Maastricht, The Netherlands, +31 (0)43 351 66 66 All rights are reserved. |                                                                                       |                     |  |                                                                                                                 |                        |      |           |