

DESCRIPTION

telescopic loading spout for dust-free loading of dry, dusty bulk solids into trucks, railcars and tankers

OPERATION QUALITIES

- max. flow rate 250 m³/h
- particle size 0-40 mm
- inlet diameter DN300
- pipe Ø125 mm for connection to external filtration
- operating temperature -20 °C / +80 °C
- motor drives 0.55 - 0.75 kW
- loading conduit consisting of internal cones and outer bellows


DESIGN

- electric winch with limit switches for highest and lowest position, emergency sensors for highest and lowest positions
- terminal box for cable connection
- level switch – vibrating / rotary / capacitance type
- bottom part consisting of sealing cone and dustproof bell with rubber skirt
- available with manual and electrical changing of the dustproof bell

ADDITIONAL ACCESSORIES

- electric control box
- pendant or remote control
- vibration unit
- shut off valves (manual, electro, pneumatic)
- design for ATEX / non-standard temperature (-40 °C / +250 °C)

L _{min} (retracted length)	L _{max} (extracted length)	L _{max} O (extracted length for open loading)	Travel (H)
1 500	4 500	4 689	3 000
1 700	4 800	4 916	3 100
1 700	5 700	5 884	4 000

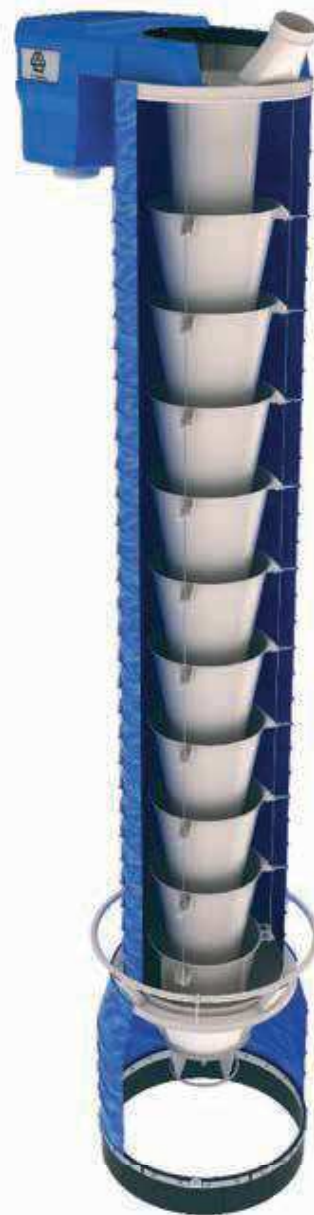

Combined telescopic loading spout type NZK300E for dustless loading of dry, dusty bulk solids into closed tankers, railway vehicles and open trucks or railway cars.

COMBINED LOADING SPOUTS

4.1. ECONOMIC LINE

4.1.1. NZK300E

