

Fast opening, enclosed zipper-band





e-tube | Series R15 | Lids on a strip - zip-open along the outer radius

Part No.	Bi	Ba	R	Available bend radii	Weight
e-tubes	[mm]	[mm]	[mm]	[mm]	[kg/m]
R15.025.R.0	25	36	063	075 100 110 125 145 180	≈ 0.45
R15.038.R.0	38	49	063	075 100 110 125 145 180	≈ 0.51
R15.063.R.0	63	76	063	075 100 110 125 145 180	≈ 0.68
R15.080.R.0	80	94	063	075 100 110 125 145 180	≈ 0.75

Before using this series on long travels please consult igus®.

Complete Part No. with required radius (R). Example: R15.025.063.0



Installation dimensions

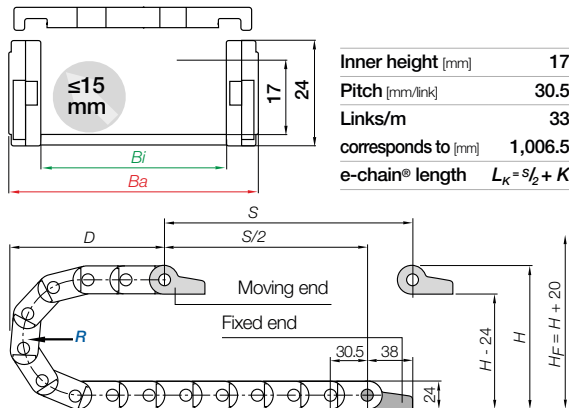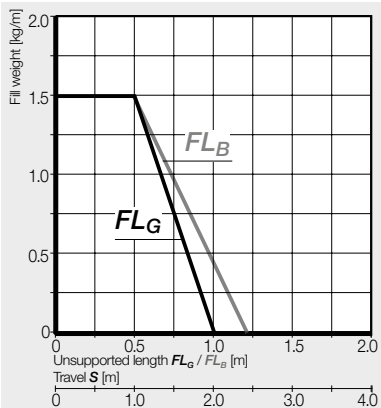


R	063	075	100	110	125	145	180	180
H	149	173	223	243	273	313	383	383
D	120	132	157	167	182	202	237	237
K	260	300	380	410	455	520	630	630

The required clearance height: $H_f = H + 20\text{mm}$ (with 1.0kg/m fill weight)

Mounting brackets, polymer one-piece | Pivoting | Locking

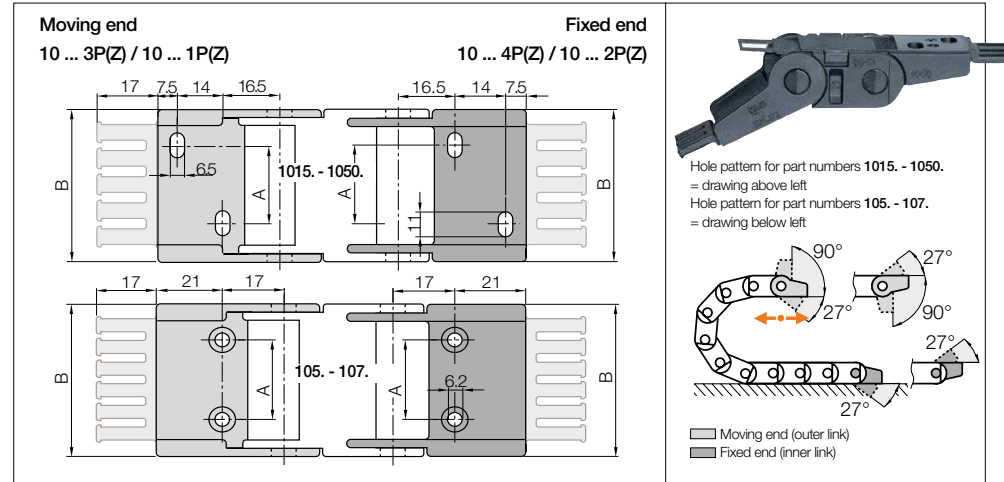



Width index	Part No. full set pivoting	Part No. full set locking		A [mm]	B [mm]	Number of teeth	
		with tiewrap plates	without tiewrap plate				
025. ►	1025.34PZ	1025.34P	1025.12PZ	1025.12P	10	35.5	3
038. ►	1038.34PZ	1038.34P	1038.12PZ	1038.12P	23	48.5	4
063. ►	105. 34PZ	105. 34P	105. 12PZ	105. 12P	48	75.0	6
080. ►	106. 34PZ	106. 34P	106. 12PZ	106. 12P	65	92.0	8

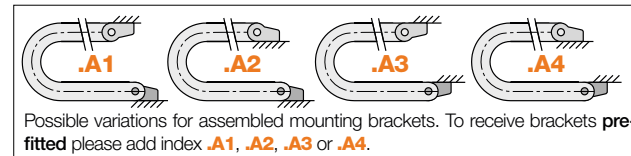

Possible variations for assembled mounting brackets. To receive brackets pre-fitted please add index .A1, .A2, .A3 or .A4.

1025.34PZ.A1 Order example
 .A... to indicate option with brackets pre-fitted
 With integrated strain relief tiewrap plates
 Full set
 Series

Interior separation

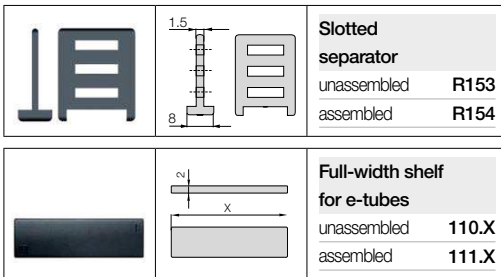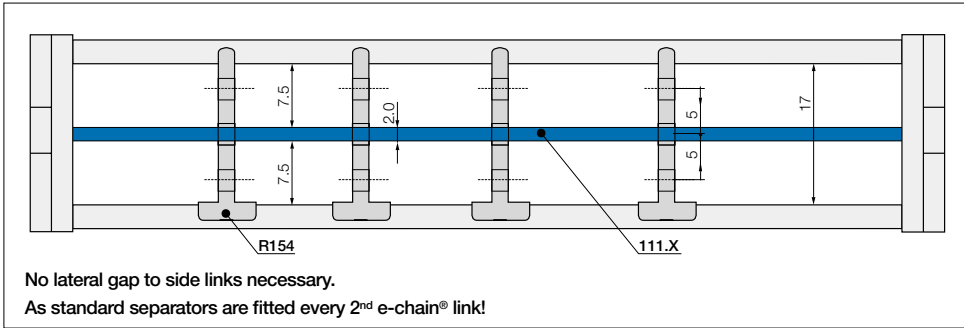
**Slotted separator**

Vertical separation in e-tubes. The slot allows basic vertical/horizontal shelving arrangements.

Full-width shelf

This option is for applications with many small cables with similar diameters. For full-width separation.

Full-width shelves Width = X [mm]	X [mm]	unassembled	assembled	X [mm]	unassembled	assembled
	025	110.25	111.25	063	110.63	111.63
038	110.38	111.38	080	110.80	111.80	

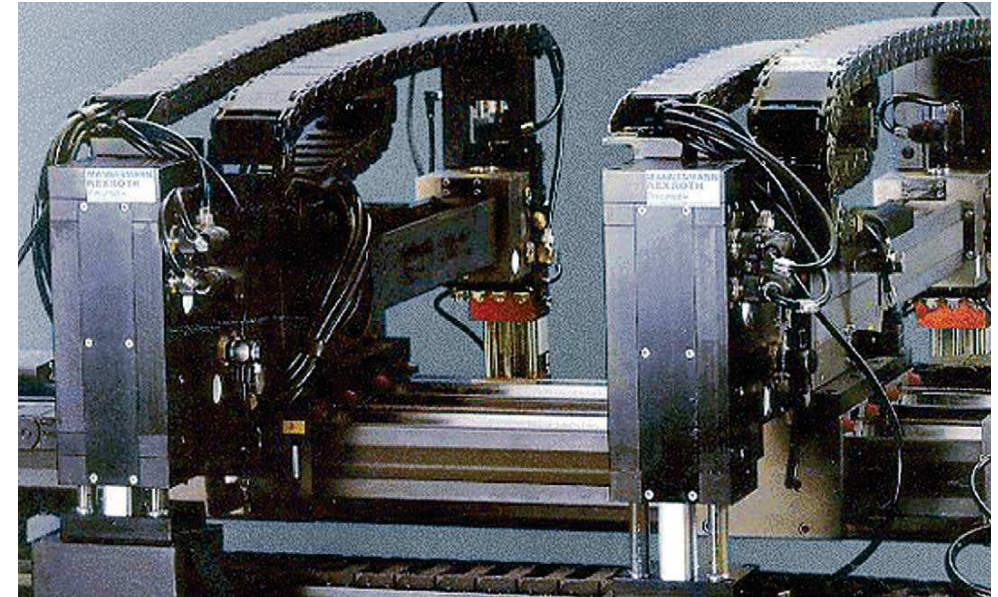

Series 15 on a pick and place machine. Acceleration: 100 m/s², smooth running