





e-chains® | Series 04 | One-piece, non-openable

Part No.	Bi	Ba	R Available bend radii					Weight
			[mm]	[mm]	[mm]	[mm]	[mm]	
e-chains®								
04.07.R.0	7	12	015	018	028	038	048	≈ 0.07
04.10.R.0	10	15	015	018	028	038	048	≈ 0.08
04.16.R.0	16	21	015	018	028	038	048	≈ 0.09
04.20.R.0	20	25	015	018	028	038	048	≈ 0.10
04.30.R.0	30	35	015	018	028	038	048	≈ 0.11


Complete Part No. with required radius (R). Example: 04.10.028.0

Installation dimensions

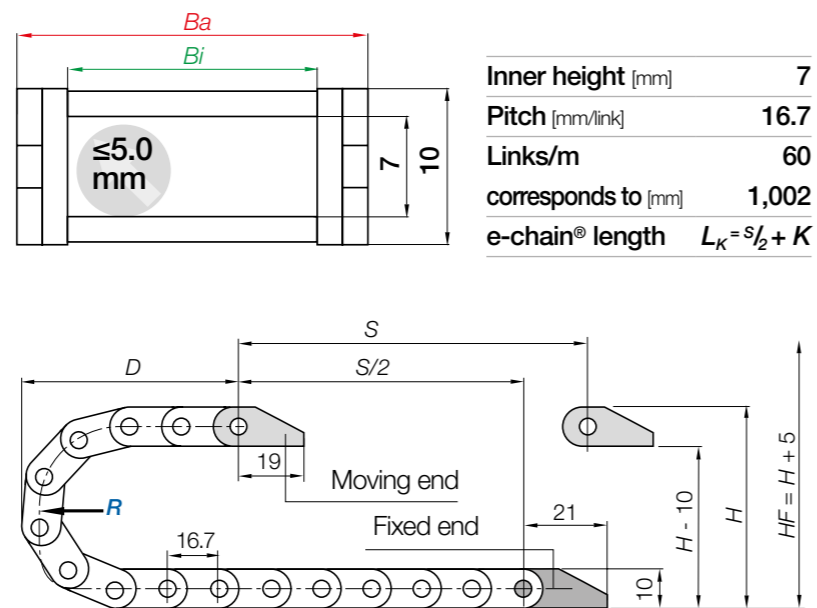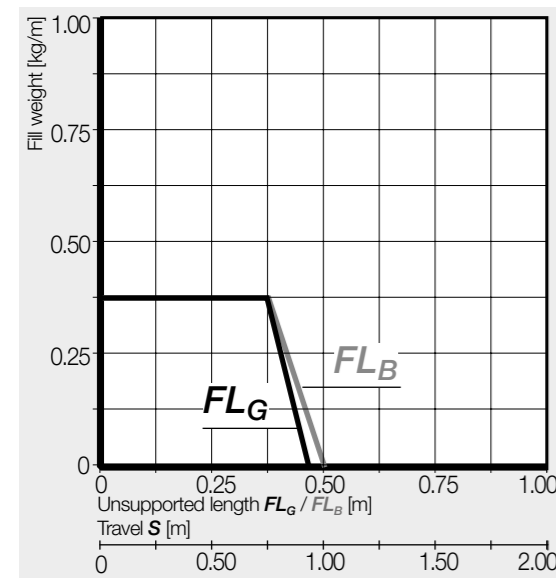

R	015	018	028	038	048
H	40	46	66	86	106
D	45	48	58	68	78
K	85	90	125	155	185

The required clearance height: $H_F = H + 5\text{mm}$ (with 0.1kg/m fill weight)

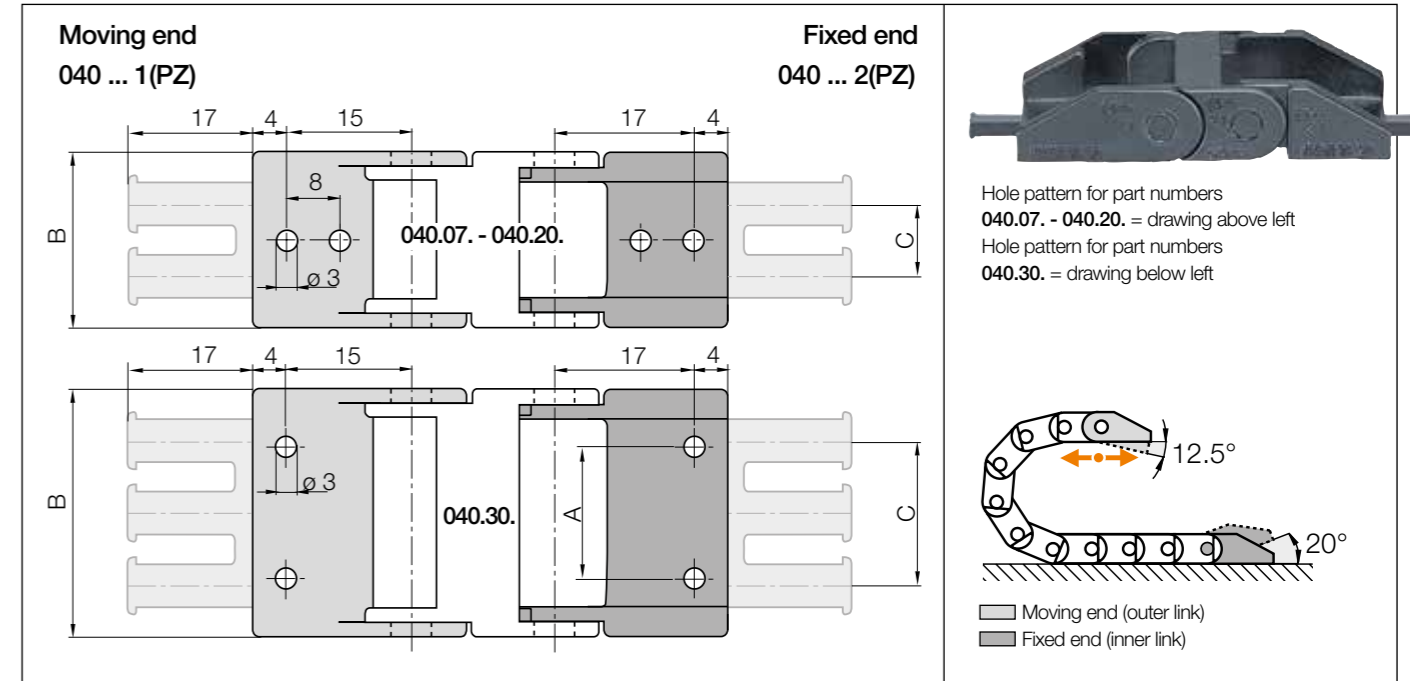

Width index	Part No. full set with tiewrap plates	Part No. full set without tiewrap plates	A [mm]	B [mm]	C [mm]	Number of teeth
07.	040.07.12PZ	040.07.12	-	12	-	1
10.	040.10.12PZ	040.10.12	-	15	-	1
16.	040.16.12PZ	040.16.12	-	21	10	2
20.	040.20.12PZ	040.20.12	-	25	10	2
30.	040.30.12PZ	040.30.12	22	35	20	3

Material mounting bracket - igumid G, temperature: -40° up to +120°C, VDE 0304 IIC UL94-HB

