



BBS/DUH

HIGH PRESSURE-THREE-WAY DIVERTER
BALL VALVE WITH THREADED PORTS

DN 10-25 | PN 100-350

MATERIALS

MATERIALS	PN	DN	Type 1	Type 2
Body	100-350	10-25	Steel	Steel
Ball	100-350	10-25	Steel, hard chromed	Steel, hard chromed
Seatings	100-350	10-25	Polyamid	PTFE

INFORMATION

3-Way-Ball Valve with threaded ports


/// Construction without Zero-Position

/// The lever is included

OPTIONS

/// Delivery on request with mounting plate.

/// Special designs on request

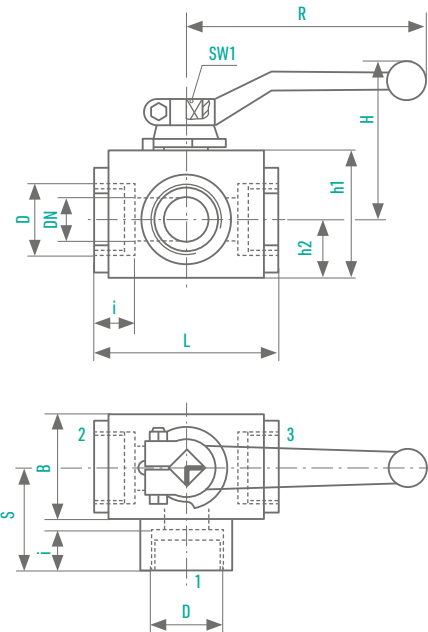

		PN [bar]																Sche- me L	
		OD [mm]	Polyamid	PTFE	D [mm]	i [mm]	L [mm]	B [mm]	h1 [mm]	h2 [mm]	D [mm]	H [mm]	R [mm]	SW1 [mm]	Wght [mm]	Ord.-No DUH L + ↓			
2	For compression fitting, light series, DIN 2353	10	12	250*	100	M 18 x 1,5	11	80	30	35	15	51	36	90	8	0,5	250210		
		12	15	250*	100	M 22 x 1,5	12	96	35	45	18	66	40	130	10	0,9	250212		
		16	18	160*	100	M 26 x 1,5	12	105	40	50	21,5	68	42	130	10	1,1	160216		
		20	22	160*	100	M 30 x 2	14	110	45	55	24	77	47	180	10	1,4	160220		
		25	28	100*	100	M 36 x 2	14	120	55	65	30,5	82	52	180	12	2,3	100225		
3	For compression fitting, heavy series, DIN 2353	10	14	350	100	M 22 x 1,5	14	80	30	35	15	51	39	90	8	0,5	350310		
		12	16	350	100	M 24 x 1,5	14	96	35	45	18	66	42	130	10	0,9	350312		
		16	20	350	100	M 30 x 2	16	105	40	50	21,5	68	46	130	10	1,1	350316		
		20	25	315	100	M 36 x 2	18	110	45	55	24	77	51	180	10	1,4	315320		
		25	30	250*	100	M 42 x 2	20	120	55	65	30,5	82	58	180	12	2,3	250325		
7	BSP female thread DIN ISO 228/1	10	-	350	100	G 3/8	12,5	60	30	35	15	51	33	90	8	0,5	350710		
		12	-	350	100	G 1/2	15	75	35	45	18	66	37	100	10	0,8	350712		
		16	-	350	100	G 1/2	15	75	40	50	21,5	68	40	130	10	1,0	350716		
		20	-	315	100	G 3/4	18	80	45	55	24	77	46	180	10	1,3	315720		
		25	-	315	100	G 1	20	90	55	65	30,5	82	53	180	12	2,2	315725		