


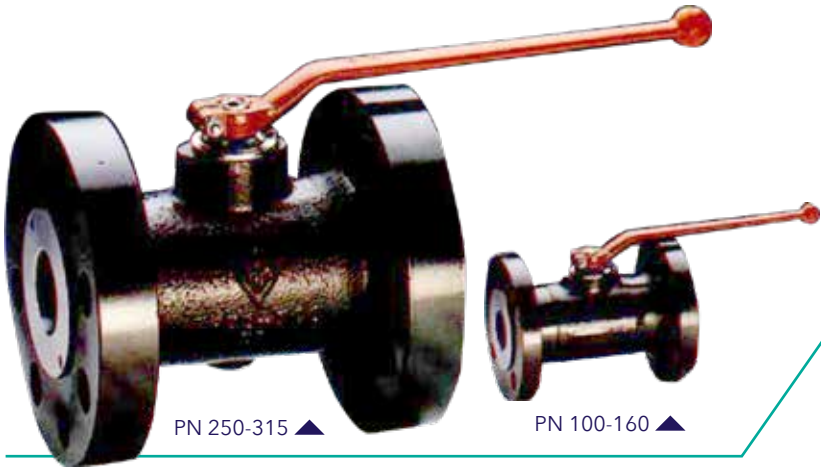

BBS/FHL

HIGH PRESSURE-BALL VALVE
WITH FLANGES

DN 40-50 | PN 100-315

FULL BORE

MATERIALS


MATERIALS	PN	DN	Type 1	Type 2
Body	100-315	40-50	Steel	Steel
Ball	100-315	40-50	Steel, hard chromed	Steel, hard chromed
Sealings	100-160	40-50	Polyamid	PTFE
	250-315		Delrin	-

INFORMATION

- Ball Valve with flanges
- Length face-to-face DIN EN 558 FTF 1
- Flange dimensions DIN 2501 Blatt 1
- The lever is included

OPTIONS

- Other shapes of flange sealing surfaces on request
- Special designs on request

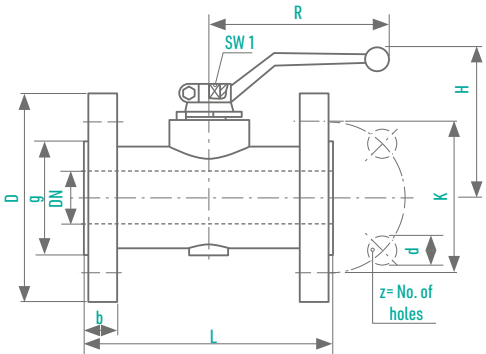

	PN													Order-Number		
	DN (mm)	Polyamid, Delrin	PTFE	L (mm)	D (mm)	g (mm)	K (mm)	b (mm)	z (mm)	d (mm)	H (mm)	R (mm)	SW1 (mm)	Weight (kg)	Type 1	Typ2
PN 100- 160 Raised face	40	160	100	200	170	88	125	28	4	22	135	325	16	12,8	0131004	0131011
	50	160	100	230	195	102	145	30	4	26	145	325	16	19,1	0131005	0131012
PN 250 Raised face	40	250	-	200	185	88	135	34	4	26	155	325	16	16,8	0131006	/
	50	250	-	230	200	102	150	38	8	26	160	325	16	22,4	0131007	/
PN 315 Raised face	40	315	-	200	195	88	145	38	4	26	155	325	16	20,4	0139890	/
	50	315	-	230	210	102	160	42	8	26	160	325	16	25,8	0139891	/

* Weight refers to type 1. Weight of type 2 may differ.