


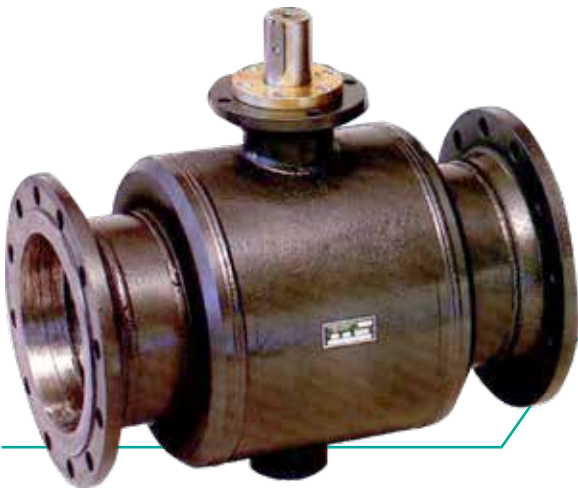

BBF/FSK

BALL VALVE WITH FLANGES,
SHORT PATTERN, FULLY WELDED

DN 250-400 | PN 10-40

FULL BORE

MATERIALS

MATERIALS	PN	DN	Type 1	Type 2
Body	10-40	250-400	Steel	Steel
Ball	10-40	250-400	Ductile iron, hard chromed	Ductile iron, hard chromed
Sealings	10-40	250-400	PTFE	PTFE
O-Rings	10-40	250-400	NBR	FPM


Please state Order-No. and Type:
FSK V XXX.XXX / Type (1 o. 2)

INFORMATION

- Ball Valve with flanges
- /// Length face-to-face DIN EN 558 FTF 28
- /// Flange dimensions DIN 2501 Blatt 1
- /// TÜV-type approval
- /// Scope of delivery without switch handle; on request with worm gear, pneumatic or electrical or electric drive available.

OPTIONS

- /// DIN-DVGW-Approval for Gas
- /// Also available for district heating
- /// Other shapes of flange sealing surfaces on request
- /// Special designs on request

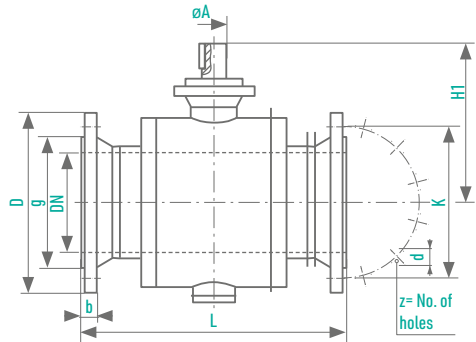

	DN	PN	L	D	g	K	b	z	d	H1	aA	Wght	Order Number
PN 10 Raised face	250	10	650	395	320	350	26	12	22	385	60	187	FSK V 010.250
	300	10	750	445	370	400	26	12	22	427	60	342	FSK V 010.300
	400	10	950	565	482	515	26	16	26	515	80	735	FSK V 010.400
PN 16 Raised face	250	16	650	405	320	355	26	12	26	385	60	189	FSK V 016.250
	300	16	750	460	378	410	28	12	26	427	60	351	FSK V 016.300
	400	16	950	580	490	525	32	16	30	515	80	756	FSK V 016.400
PN 25 Raised face	250	25	650	425	335	370	32	12	30	385	60	206	FSK V 025.250
	300	25	750	485	395	430	34	16	30	427	60	370	FSK V 025.300
	400	25	950	620	505	550	40	16	36	515	80	800	FSK V 025.400
PN 40 Raised face	250	40	650	450	345	385	38	12	33	385	60	227	FSK V 040.250
	300	40	750	515	410	450	42	16	33	427	60	407	FSK V 040.300
	400	40	950	660	535	585	50	16	39	515	80	870	FSK V 040.400