


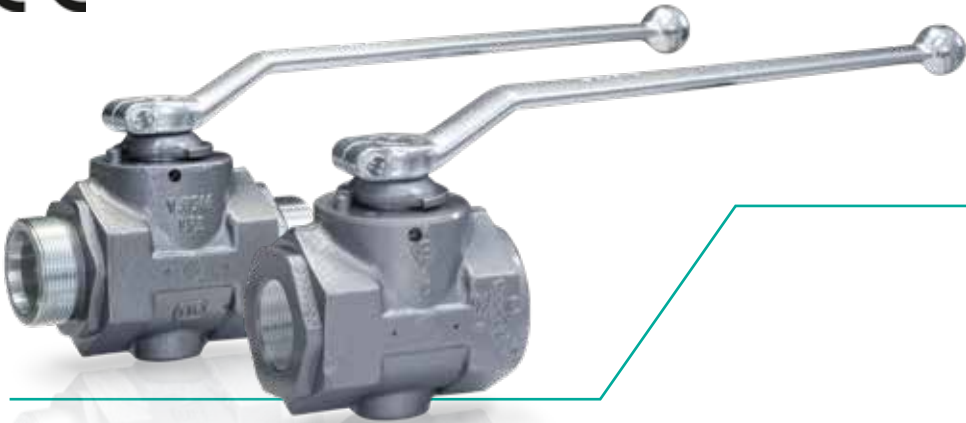

BBS/MKG

BALL VALVE WITH
THREADED PORTS

VERSION E
DN 32-50 | PN 315

FULL BORE

INFORMATION

Ball Valve with female threads


- /// CE marking
- /// Suitable for pastes
- /// Mounting holes are included
- /// The lever is included

MATERIALS

Body	Steel
Fittings	Steel
Ball	Steel, hardened
Sealings	Steel
O-Rings	FPM
Stem	Stainless steel
Stem retainer	Stainless steel

OPTIONS

- /// Locking device
(BBS/MKG Version E-L)
Surcharge: 23,00 €
- /// Special designs on request

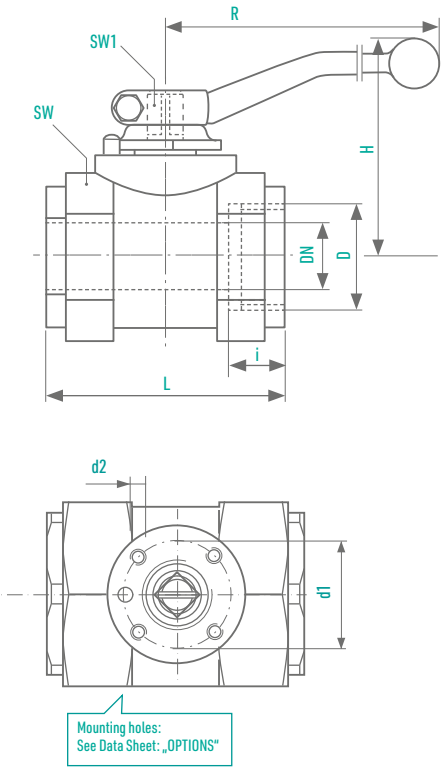

7 BSP female thread
DIN ISO 228/1

DN [mm]	OD Pipe [mm]	PN [bar]	D [mm]	i [mm]	L [mm]	SW [mm]	H [mm]	R [mm]	SW 1 [mm]	Weight [kg]	Order Number
32	-	315	G 1 1/4	21	110	70	115	300	16	3,0	0045200
40	-	315	G 1 1/2	23	120	80	120	300	16	4,0	0045201
50	-	315	G 2	24	140	100	130	300	16	6,0	0045202




8 NPT female thread
ANSI/ASME B 1.20.1

DN [mm]	OD Pipe [mm]	PN [bar]	D [mm]	i [mm]	L [mm]	SW [mm]	H [mm]	R [mm]	SW 1 [mm]	Weight [kg]	Order Number
32	-	315	NPT 1 1/4	21	110	70	115	300	16	3,0	0045203
40	-	315	NPT 1 1/2	23	120	80	120	300	16	4,0	0045204
50	-	315	NPT 2	24	140	100	130	300	16	6,0	0045205


OPTIONS

LOCKING DEVICE, OPTIONAL (VERSION -L)

Subject to surcharge

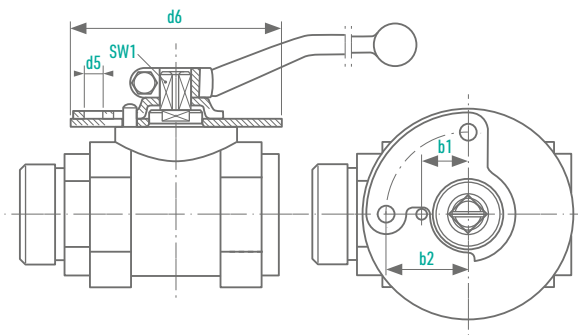

Models	DN [mm]	b1	b2	d5	d6	
KMG KHG MKG ENG	4	12	23	7,5	60	
	6	12	23	7,5	60	
	8	12	23	7,5	60	
	10	13,5	23	7,5	65	
	12	17,5	31	7	80	
	16	17,5	31	7	80	
	20	17,5	31	7	80	
	25	17,5	31	7	80	
	32	24	41	7	100	
	40	24	41	7	100	
Connection types 2,3,7,8, 40		50	24	41	7	100

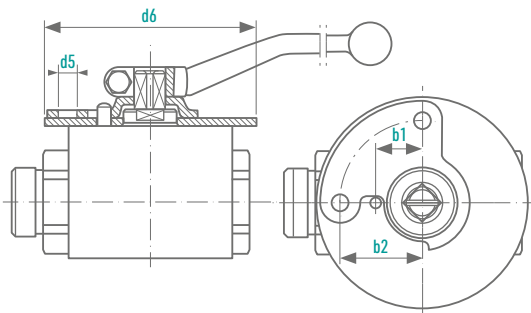

BAUREIHEN	DN [mm]	b1	b2	d5	d6
BMG BHG EBG	4	12	23	7,5	60
	6	12	23	7,5	60
	8	12	23	7,5	60
	10	13,5	23	7,5	65
	12	17,5	31	7	80
	16	17,5	31	7	80
	20	17,5	31	7	80
	25	17,5	31	7	80
Connection types 2,3,7,8,40					

All information subject to change and error