



BBS/MLG

BRASS-BALL VALVE
WITH THREADED SOCKET

DN 6-100 | PN 16-32

FULL BORE

INFORMATION

Ball Valve with female threads


/// The lever is included

MATERIALS

Body	Brass, nickel-plated
Screw connections	Brass , nickel-plated
Ball	Brass, chrome-plated
Sealings	PTFE
O-Rings	FPM
Stem	Brass

OPTIONS

/// Special designs on request

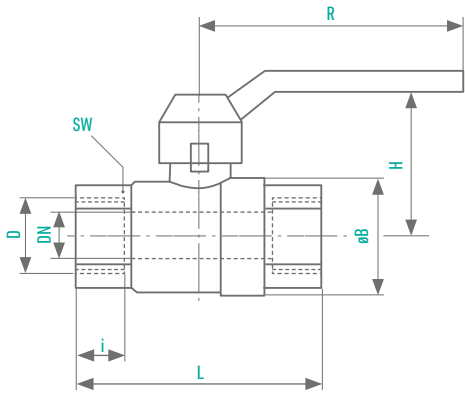

7 BSP female thread
DIN ISO 228/1

DN [mm]	PN [bar]	D [mm]	i [mm]	L [mm]	aB [mm]	SW [mm]	H [mm]	R [mm]	Weight [kg]	Order Number
6	32	G 1/4	14	50	22	17	35	75	0,2	0375034
10	32	G 3/8	15	60	24	21	37	75	0,2	0375010
15	32	G 1/2	17	75	32	27	55	90	0,4	0375011
20	32	G 3/4	20	80	39	32	58	90	0,5	0375012
25	32	G 1	21	90	46	41	70	125	0,8	0375038
32	32	G 1 1/4	24	110	56	50	75	125	1,2	0375013
40	32	G 1 1/2	24	120	68	55	87	160	1,5	0375014
50	32	G 2	27	140	82	70	100	205	2,6	0375015
65	16	G 2 1/2	29	150	112	90	128	205	3,6	0376278
80	16	G 3	32	175	137	105	142	205	5,8	0376279
100	16	G 4	39	215	166	130	162	260	10,4	0376280