


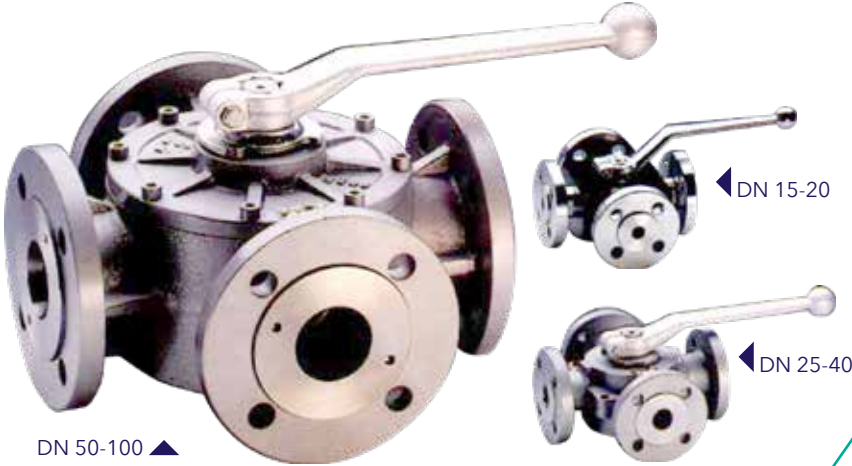

BBS/VNF


FOUR-WAY -BALL VALVE
WITH FLANGES

DN 15-100 | PN 10-40

MATERIALS

Werk- stoffe	PN	DN	
Body	10-40	15-20	Steel
		25-100	Ductile iron
Ball	10-40	15-20	Brass, hard chromed
		25-100	Ductile iron, hard chromed
Dicht- ungen	10-40	15-100	PTFE

Please state Order-No. & Version
VNF L XXX.XXX

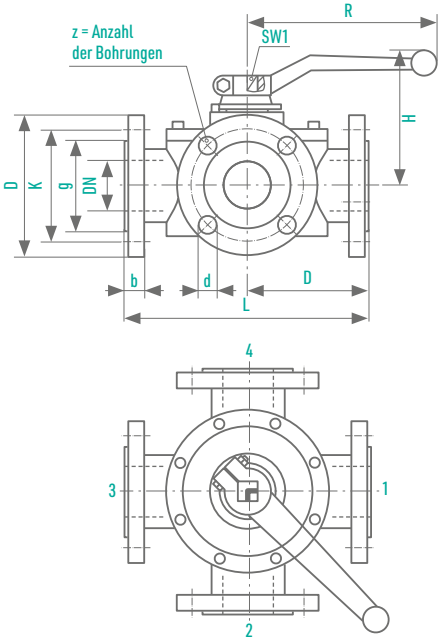

INFORMATION

3-Way-Ball Valve with flanges

/// Construction with Zero-Position

/// Flange dimensions DIN 2501 Blatt 1

/// The lever is included

OPTIONS

/// Other shapes of flange sealing surfaces on request.

/// Special designs on request

Connection	DN [mm]	PN [bar]	L [mm]	L1 [mm]	D [mm]	g [mm]	K [mm]	b [mm]	z [mm]	d [mm]	H [mm]	R [mm]	SW1 [mm]	Wght [mm]	Sche- me T Ord.-No VNF T + ↓	Sche- me L Ord.-No VNF L + ↓	Sche- me X Ord.-No VNF X + ↓
PN 10-16 Raised face	15	16	170	85	95	45	65	16	4	14	90	205	16	8,9	016015	016015	016015
	20	16	195	97,5	105	58	75	18	4	14	85	300	16	10,8	016020	016020	016020
	25	16	220	110	115	68	85	18	4	14	95	350	22	14,0	016025	016025	016025
	32	16	240	120	140	78	100	18	4	18	100	350	22	19,2	016032	016032	016032
	40	16	285	142,5	150	88	110	18	4	18	110	350	22	28,0	016040	016040	016040
	50	16	290	145	165	102	125	20	4	18	145	500	22	35,0	016050	016050	016050
	65	16	310	155	185	122	145	22	4	18	155	500	22	47,0	016065	016065	016065
	80	16	350	175	200	138	160	20	8	18	185	600	32	63,0	016080	016080	016080
	100	16	380	190	220	158	180	20	8	18	195	600	32	84,0	016100	016100	016100
PN 25 Raised face	15	25	170	85	95	45	65	16	4	14	90	205	16	8,9	025015	025015	025015
	20	25	195	97,5	105	58	75	18	4	14	85	300	16	10,8	025020	025020	025020
	25	25	220	110	115	68	85	18	4	14	95	350	22	14,0	025025	025025	025025
	32	25	240	120	140	78	100	18	4	18	100	350	22	19,2	025032	025032	025032
	40	25	285	142,5	150	88	110	18	4	18	110	350	22	28,0	025040	025040	025040
	50	25	290	145	165	102	125	20	4	18	145	500	22	35,0	025050	025050	025050
	65	25	310	155	185	122	145	22	8	18	155	500	22	47,0	025065	025065	025065
PN 40 Raised face	15	40	170	85	95	45	65	16	4	14	90	205	16	8,9	040015	040015	040015
	20	40	195	97,5	105	58	75	18	4	14	85	300	16	10,8	040020	040020	040020
	25	40	220	110	115	68	85	18	4	14	95	350	22	14,0	040025	040025	040025
	32	40	240	120	140	78	100	18	4	18	100	350	22	19,2	040032	040032	040032
	40	40	285	142,5	150	88	110	18	4	18	110	350	22	28,0	040040	040040	040040
	50	40	290	145	165	102	125	20	4	18	145	500	22	35,0	040050	040050	040050