

LOW PRESSURE-FOUR-WAY
BALL VALVE WITH THREADED PORTS

DN 3-40 | PN 25

MATERIALS

MATERIALS	PN	DN	
Body	25	3-40	Steel
Ball	25	3	Stainless steel
		4-20	Brass, hard chromed
		25-40	Ductile iron, hard chromed
Sealings	25	3-40	PTFE
O-Rings	25	3-40	FPM

INFORMATION



4-Way-Ball Valve with threaded ports

/// Construction with Zero-Position

/// The lever is included

OPTIONS

/// Special designs on request

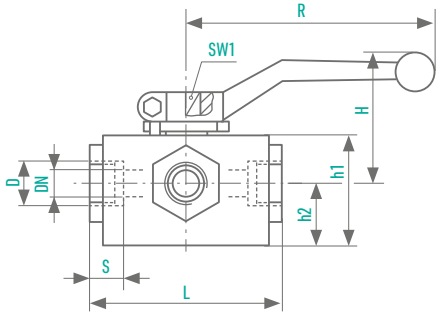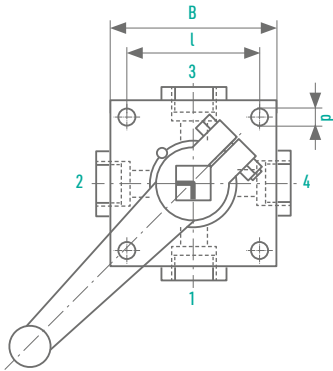

Anschluss	DN (mm)	OD Pipe (mm)	PN (bar)	D (mm)	i (mm)	L (mm)	B (mm)	L (mm)	h1 (mm)	h2 (mm)	D (mm)	H (mm)	R (mm)	SW1 (mm)	Wght (mm)	Order No. VNG L	Order No. VNG T	Order No. VNG X
 2	For compression fitting, light series, DIN 2353																	
	4	6	25	M 12 x 1,5	10	102	70	55	47,5	26	6,5	73	205	16	2,0	0221732	0221700	0221764
	6	8	25	M 14 x 1,5	10	102	70	55	47,5	26	6,5	73	205	16	2,0	0221733	0221701	0221765
	8	10	25	M 16 x 1,5	11	114	80	65	53	30	6,5	75	205	16	3,0	0221734	0221702	0221766
	10	12	25	M 18 x 1,5	11	114	80	65	53	30	6,5	75	205	16	3,0	0221735	0221703	0221767
	12	15	25	M 22 x 1,5	12	136	100	80	60	35	9	80	205	16	4,5	0221736	0221704	0221768
	16	18	25	M 26 x 1,5	12	136	100	80	60	35	9	80	205	16	4,5	0221737	0221705	0221769
	20	22	25	M 30 x 2	14	149	110	85	72	42,5	9	85	300	16	7,0	0221738	0221706	0221770
	25	28	25	M 36 x 2	14	170	130	105	85	47,5	11	95	350	22	8,0	0221739	0221707	0221771
	32	35	25	M 45 x 2	16	198	150	115	95	52,5	11	100	350	22	10,5	0221740	0221708	0221772
 3	For compression fitting, heavy series, DIN 2353																	
	40	42	25	M 52 x 2	16	238	190	150	110	57,5	14,5	110	350	22	20,0	0221741	0221709	0221773
	4	8	25	M 16 x 1,5	12	106	70	55	47,5	26	6,5	73	205	16	2,0	0222237	0222228	0222246
	6	10	25	M 18 x 1,5	12	106	70	55	47,5	26	6,5	73	205	16	2,0	0222238	0222229	0222247
	8	12	25	M 20 x 1,5	12	116	80	65	53	30	6,5	75	205	16	3,0	0222239	0222230	0222248
	10	14	25	M 22 x 1,5	14	120	80	65	53	30	6,5	75	205	16	3,0	0222240	0222231	0222249
	12	16	25	M 24 x 1,5	14	140	100	80	60	35	9	80	205	16	4,5	0222241	0222232	0222250
	16	20	25	M 30 x 2	16	144	100	80	60	35	9	80	205	16	4,5	0222242	0222233	0222251
	20	25	25	M 36 x 2	18	157	110	85	72	42,5	9	85	300	16	7,0	0222243	0222234	0222252
	25	30	25	M 42 x 2	20	182	130	105	85	47,5	11	95	350	22	8,0	0222244	0222235	0222253
 7	BSP female thread DIN ISO 228/1																	
	32	38	25	M 52 x 2	22	210	150	115	95	52,5	11	100	350	22	10,5	0222245	0222236	0222254
	3	-	25	G 1/8	11	55	45	35	32	18	5,5	45	90	8	0,8	0221742	0221710	0221774
	4	-	25	G 1/8	12,5	82	70	55	47,5	26	6,5	73	205	16	2,0	0221743	0221711	0221775
	6	-	25	G 1/8	12,5	82	70	55	47,5	26	6,5	73	205	16	2,0	0221744	0221712	0221776
	8	-	25	G 3/8	12,5	92	80	65	53	30	6,5	75	205	16	3,0	0221745	0221713	0221777
	10	-	25	G 3/8	12,5	92	80	65	53	30	6,5	75	205	16	3,0	0221746	0221714	0221778
	12	-	25	G 1/2	15	113	100	80	60	35	9	80	205	16	4,5	0221747	0221715	0221779
	16	-	25	G 1/2	15	113	100	80	60	35	9	80	205	16	4,5	0221748	0221716	0221780
	20	-	25	G 3/4	18	129	110	85	72	42,5	9	85	300	16	7,0	0221749	0221717	0221781
 7	25	-	25	G 1	19	151	130	105	85	47,5	11	95	350	22	8,0	0221750	0221718	0221782
	32	-	25	G 1 1/4	20	172	150	115	95	52,5	11	100	350	22	10,5	0221751	0221719	0221783
	40	-	25	G 1 1/2	23	206	190	150	110	57,5	14,5	110	350	22	20,0	0221752	0221720	0221784