


# Data sheet

## chainflex® CF34.UL.D



Motor cable (Class 6.6.4.2) • For extremely heavy duty applications • TPE outer jacket • Oil and bio-oil resistant • Flame retardant • UV-resistant • Hydrolysis and microbe-resistant

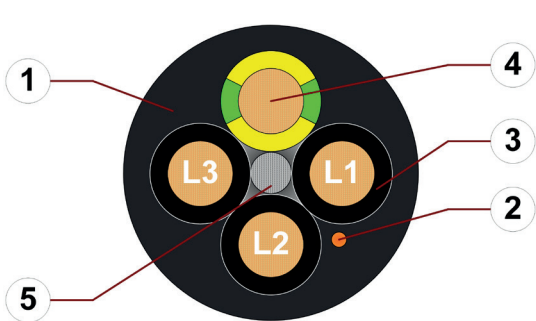

1. Outer jacket: Pressure extruded, gusset-filling, flame-retardant TPE mixture
2. CFRIP: Tear strip for faster cable stripping
3. Core insulation: Mechanically high-quality, especially low-capacitance XLPE mixture
4. Conductor: Especially bending-stable version consisting of bare copper wires
5. Strain relief: Tensile stress-resistant centre element

Example image  
For detailed overview please see design table

### Cable structure

	Conductor	<b>Cores &lt; 10 mm<sup>2</sup>:</b> Stranded conductor in especially bending-resistant version consisting of bare copper wires (following DIN EN 60228). <b>Cores ≥ 10 mm<sup>2</sup>:</b> Conductor cable consisting of pre-leads (following DIN EN 60228).
	Core insulation	Mechanically high-quality, especially low-capacitance XLPE mixture.
	Core structure	Cores wound with a short pitch length around a high tensile strength centre element.
	Core identification	Black cores with white numbers, one green-yellow core. 1. Core: U / L1 / C / L+ 2. Core: V / L2 3. Core: W / L3 / D / L- 4. Core: 4 / N
	Outer jacket	Low-adhesion, extremely abrasion-resistant and highly flexible TPE mixture, adapted to suit the requirements in e-chains®. Colour: Signal black (similar to RAL 9004) Printing: white
	CFRIP®	Strip cables faster: a tear strip is moulded into the outer jacket Video ► <a href="http://www.igus.eu/CFRIP">www.igus.eu/CFRIP</a>

„00000 m“ igus chainflex CF34.UL.--.D① ----② 600/1000V E310776

cRUus AWM Style ③ VW-1 AWM I/II A/B 90°C 1000V FT1 DNV-GL TAE00003X9

EAC/CTP CE DESINA RoHS-II conform [www.igus.de](http://www.igus.de) +++ chainflex cable works +++

\* **Length printing:** Not calibrated. Only intended as an orientation aid.  
① / ② Cable identification according to Part No. (see technical table).  
③ Printing of the UL style (see related chapter).  
Example: ... chainflex **CF34.UL.15.04.D 4G1.5 600/1000V** ...



igus 36-month  
chainflex cable  
guarantee and  
service life  
calculator based  
on 2 billion test  
cycles per year



09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.



HENNLICH -  
ŽÍJEME TECHNIKOU

o.z. LIN-TECH HENNLICH s.r.o.  
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333  
E-mail: [lin-tech@hennlich.cz](mailto:lin-tech@hennlich.cz)

[www.hennlich.cz/lin-tech](http://www.hennlich.cz/lin-tech)







# Data sheet

## chainflex® CF34.UL.D



Motor cable (Class 6.6.4.2) ● For extremely heavy duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● Flame retardant ● UV-resistant ● Hydrolysis and microbe-resistant

### Dynamic information

	Bend radius	e-chain® linear flexible fixed	minimum 7.5 x d minimum 6 x d minimum 4 x d
	Temperature	e-chain® linear flexible fixed	-35 °C up to +90 °C -45 °C up to +90 °C (following DIN EN 60811-504) -50 °C up to +90 °C (following DIN EN 50305)
	v max.	unsupported gliding	10 m/s 6 m/s
	a max.		80 m/s <sup>2</sup>
	Travel distance		Unsupported travel distances and up to 400 m for gliding applications, Class 6
	Torsion		Torsion ± 90°, with 1 m cable length



These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

### Guaranteed service life according to guarantee conditions

Double strokes	5 million	7.5 million	10 million
Temperature, from/to [°C]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]
-35/-25	10	11	12
-25/+80	7.5	8.5	9.5
+80/+90	10	11	12

Minimum guaranteed service life of the cable under the specified conditions.  
The installation of the cable is recommended within the middle temperature range.

### Electrical information

	Nominal voltage	600/1000 V (following DIN VDE 0298-3) 1000 V (following UL)
	Testing voltage	4000 V (following DIN EN 50395)



Example image

09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

2/6

# Data sheet

## chainflex® CF34.UL.D



Motor cable (Class 6.6.4.2) ● For extremely heavy duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● Flame retardant ● UV-resistant ● Hydrolysis and microbe-resistant

### Properties and approvals

	UV resistance	High
	Oil resistance	Oil-resistant (following DIN EN 60811-404), bio-oil-resistant (following VDMA 24568 with Plantocut 8 S-MB tested by DEA), Class 4
	Flame retardant	According to IEC 60332-1-2, FT1, VW-1
	Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
	UL verified	Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
	UL/CSA AWM	See table UL/CSA AWM for details
	NFPA	Following NFPA 79-2018, chapter 12.9
	DNV-GL	Type approval certificate No. TAE00003X9
	EAC	Certificate No. RU C-DE.ME77.B.02324 (TR ZU)
	CTP	Certificate No. C-DE.PB49.B.00420 (Fire protection)
	REACH	In accordance with regulation (EC) No. 1907/2006 (REACH)
	Lead-free	Following 2011/65/EC (RoHS-II/RoHS-III)
	Cleanroom	According to ISO Class 1, material/cable tested by IPA according to DIN EN ISO standard 14644-1
	DESINA	According to VDW, DESINA standardisation
	CE	Following 2014/35/EU



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image



09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

3/6



HENNLICH -  
ŽÍJEME TECHNIKOU

o.z. LIN-TECH HENNLICH s.r.o.  
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333  
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech

# Data sheet

## chainflex® CF34.UL.D



Motor cable (Class 6.6.4.2) ● For extremely heavy duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● Flame retardant ● UV-resistant ● Hydrolysis and microbe-resistant

### Properties and approvals

UL/CSA AWM Details

Conductor nominal cross section [mm²]	Number of cores	UL style core insulation	UL style outer jacket	UL Voltage Rating [V]	UL Temperature Rating [°C]
1.5	4	30052	22022	1000	90
2.5	4	30052	22021	1000	90
4	4	30052	22021	1000	90
6	4-5	30052	22021	1000	90
10	4-5	30052	22021	1000	90
16	4-5	30052	22021	1000	90
25	4	30052	22021	1000	90




igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



### Typical lab test setup for this cable series

Test bend radius R	approx. 55 - 200 mm
Test travel S	approx. 1 - 15 m
Test duration	minimum 2 - 4 million double strokes
Test speed	approx. 0.5 - 2 m / s
Test acceleration	approx. 0.5 - 1.5 m / s²

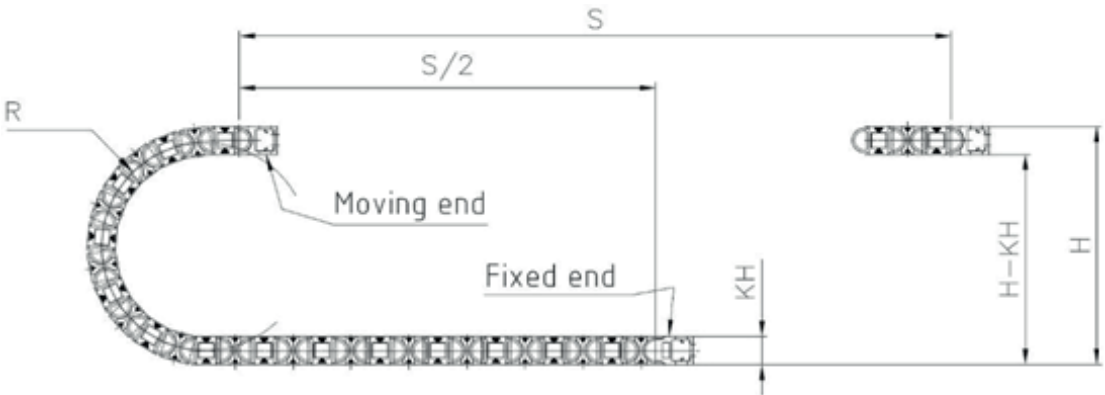

### Typical application areas

- For extremely heavy duty applications, Class 6
- Unsupported travel distances and up to 400 m and more for gliding applications, Class 6
- Almost unlimited resistance to oil, also with bio-oils, Class 4
- Torsion ± 90°, with 1 m cable length, Class 2
- Indoor and outdoor applications, UV-resistant
- Storage and retrieval units for high-bay warehouses, Machining units/machine tools, quick handling, Clean room, semiconductor insertion, outdoor cranes, low temperature applications

09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

4/6

# Data sheet

## chainflex® CF34.UL.D



Motor cable (Class 6.6.4.2) ● For extremely heavy duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● Flame retardant ● UV-resistant ● Hydrolysis and microbe-resistant

### Technical tables:

#### Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF34.UL.15.04.D	4G1.5	8.0	61	102
CF34.UL.25.04.D	4G2.5	10.0	100	159
CF34.UL.40.04.D	4G4.0	11.5	163	236
CF34.UL.60.04.D	4G6.0	13.5	237	332
CF34.UL.60.05.D	5G6.0	15.0	297	406
CF34.UL.100.04.D	4G10	16.5	407	537
CF34.UL.100.05.D	5G10	19.5	515	670
CF34.UL.160.04.D	4G16	20.0	646	819
CF34.UL.160.05.D	5G16	22.5	815	1009
CF34.UL.250.04.D	4G25	24.5	1014	1271
CF34.UL.100.04.O.PE.D	4x10	16.5	407	537
CF34.UL.160.04.O.PE.D	4x16	20.0	646	819

**Note:** The given outer diameters are maximum values and may tend toward lower tolerance limits.  
G = with green-yellow earth core x = without earth core

#### Electrical information

Conductor nominal cross section [mm²]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Max. current rating at 30 °C [A]
1.5	13.3	21
2.5	7.98	30
4	4.95	41
6	3.3	53
10	1.91	74
16	1.21	99
25	0.78	131

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



Example image

09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

5/6



**HENNlich -**  
**ŽIJEME TECHNIKOU**

**o.z. LIN-TECH HENNlich s.r.o.**  
Českolipská 9, 412 01 Litoměřice

**Telefon:** +420 416 711 333  
**E-mail:** lin-tech@hennlich.cz

[www.hennlich.cz/lin-tech](http://www.hennlich.cz/lin-tech)



# Data sheet

## chainflex® CF34.UL.D



Motor cable (Class 6.6.4.2) • For extremely heavy duty applications • TPE outer jacket • Oil and bio-oil resistant • Flame retardant • UV-resistant • Hydrolysis and microbe-resistant



### Design table

Part No.	Number of cores	Core design
CF34.UL.XX.04.D	4	
CF34.UL.XX.04.O.PE.D	4	
CF34.UL.XX.05.D	5	



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.