

# Control cable | PVC | chainflex® CF881

**36** 5,000,000 Double strokes guaranteed **12.5 x d** Bend radius, e-chain® **10m** Travel distance, e-chain®

- For flexing applications
- PVC outer jacket
- Shielded
- Flame-retardant

## Dynamic information

<b>Bend radius</b>	<b>e-chain® linear flexible</b>	minimum 12.5 x d
	<b>fixed</b>	minimum 10 x d
<b>Temperature</b>	<b>e-chain® linear flexible</b>	+5°C up to +70°C
	<b>fixed</b>	-5°C up to +70°C (following DIN EN 60811-504)
<b>v max.</b>	<b>unsupported</b>	3m/s
<b>a max.</b>		20m/s <sup>2</sup>
<b>Travel distance</b>		Unsupported travels up to 10m, Class 1

## Cable structure

<b>Conductor</b>	Conductor consisting of bare copper wires (according to DIN EN 60228).
<b>Core insulation</b>	Mechanically high-quality TPE mixture.
<b>Core structure</b>	Cores wound with an optimised pitch length.
<b>Core identification</b>	Black cores with white numbers, one green-yellow core.
<b>Overall shield</b>	Braiding made of tinned copper wires. Coverage approx. 60% optical
<b>Outer jacket</b>	Low-adhesion PVC mixture, adapted to suit the requirements in e-chains®. Colour: jet black (similar to RAL 9005)

## Electrical information

<b>Nominal voltage</b>	300/500V 300V (following UL)
<b>Testing voltage</b>	2,000V (following DIN EN 50395)

Basic requirements  
Travel distance  
Oil resistance  
Torsion

low	1	2	3	4	5	6	7	highest
unsupported	1	2	3	4	5	6	≥ 400m	
none	1	2	3	4	highest			
none	1	2	3	4	±360°			

## Class 3.1.1.1

### Properties and approvals

<b>Flame-retardant</b>	According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2 / Horizontal Flame
<b>Silicone-free</b>	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
<b>UL verified</b>	Certificate No. B129699: "igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year"
<b>UL/CSA AWM</b>	See data sheet for details ► <a href="http://www.igus.eu/CF881">www.igus.eu/CF881</a>
<b>NFPA</b>	Following NFPA 79-2018, chapter 12.9
<b>EAC</b>	Certificate No. RU C-DE.ME77.B.00300/19
<b>REACH</b>	In accordance with regulation (EC) No. 1907/2006 (REACH)
<b>Lead-free</b>	Following 2011/65/EC (RoHS-II/RoHS-III)
<b>CE</b>	Following 2014/35/EU
<b>UKCA</b>	In accordance with the valid regulations of the United Kingdom (as at 08/2021)


### Guaranteed service life (details see page 28-29)

Double strokes*	1 million	3 million	5 million
Temperature, from/to [°C]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]
+5/+15	15	16	17
+15/+60	12.5	13.5	14.5
+60/+70	15	16	17

\* Higher number of double strokes? Service life calculation online ► [www.igus.eu/chainflexlife](http://www.igus.eu/chainflexlife)

### Typical application areas

- For flexing applications, Class 3
- Especially for unsupported travels, Class 1
- Without influence of oil, Class 1
- No torsion, Class 1
- Preferably indoor applications
- Wood/stone processing, packaging industry, feeding, handling, adjusting devices





igus® chainflex® CF881

Example image

Part No.	Number of cores and conductor nominal cross section [mm²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF881.05.03	(3G0.5)C	6.0	28	47
CF881.05.04	(4G0.5)C	6.5	35	54
CF881.05.05	(5G0.5)C	7.0	41	65
CF881.05.07	(7G0.5)C	8.0	59	75
CF881.05.12	(12G0.5)C	9.0	91	125
CF881.05.18	(18G0.5)C	11.0	136	177
CF881.05.25	(25G0.5)C	13.0	210	243
CF881.07.02	(2x0.75)C	6.5	30	50
CF881.07.03	(3G0.75)C	7.0	37	66
CF881.07.04	(4G0.75)C	7.5	46	72
CF881.07.05	(5G0.75)C	8.0	61	87
CF881.07.07	(7G0.75)C	9.0	83	112
CF881.07.12	(12G0.75)C	10.5	124	170
CF881.07.18	(18G0.75)C	12.0	183	238
CF881.07.25 <sup>11)</sup>	(25G0.75)C	14.5	222	309
CF881.10.02	(2x1.0)C	6.5	30	52
CF881.10.03	(3G1.0)C	7.0	46	73
CF881.10.04	(4G1.0)C	7.5	63	102
CF881.10.05	(5G1.0)C	8.0	76	110
CF881.10.07	(7G1.0)C	9.5	100	130
CF881.10.12	(12G1.0)C	11.5	167	229
CF881.10.18	(18G1.0)C	13.0	213	281
CF881.10.25	(25G1.0)C	16.0	291	390
CF881.15.02	(2x1.5)C	7.5	60	71
CF881.15.03	(3G1.5)C	7.5	63	87
CF881.15.04	(4G1.5)C	8.5	90	111
CF881.15.05	(5G1.5)C	9.0	94	131
CF881.15.07	(7G1.5)C	11.0	153	183
CF881.15.12	(12G1.5)C	13.0	212	282
CF881.15.18	(18G1.5)C	15.0	399	458
CF881.15.25	(25G1.5)C	18.5	425	573
CF881.25.04	(4G2.5)C	10.0	141	163
CF881.25.05	(5G2.5)C	11.0	149	195
CF881.25.07	(7G2.5)C	13.0	204	262
CF881.25.12 <sup>11)</sup>	(12G2.5)C	16.0	342	428

<sup>11)</sup> Phase-out model

**Note:** The given outer diameters are maximum values and may tend toward lower tolerance limits.  
G = with green-yellow earth core x = without earth core

### Class 3.1.1.1

**Order example: CF881.25.25 - to your desired length (0.5m steps)**  
CF881 chainflex® series .25 Code nominal cross section .25 Number of cores

Order online ► [www.igus.eu/CF881](http://www.igus.eu/CF881)


Delivery time 24hrs or today.  
Delivery time means time until goods are shipped.



#### Cables available in the chainflex® CASE

Simple savings on delivery, storage space and re-ordering with the chainflex® CASE - ship'n store by igus®.

More on this on page 24/25 and online: [www.igus.eu/cf-case](http://www.igus.eu/cf-case)

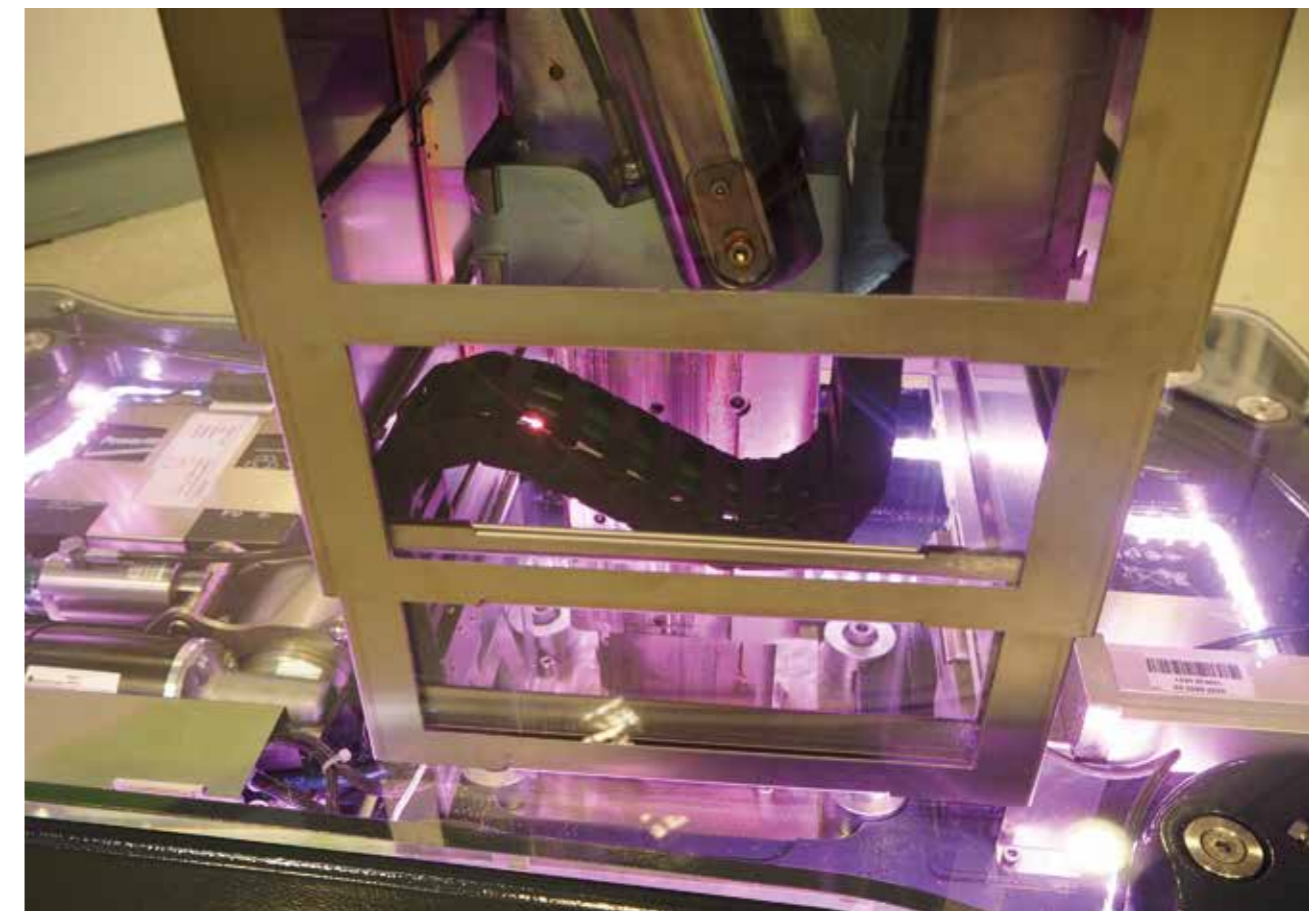

chainflex® CF881 in a mobile surgical table

