


Data sheet

chainflex® CFLG88



Fibre Optic Cable (Class 3.1.1.1) ● Graded index glass-fibre cable for flexing applications
● PVC outer jacket ● Flame retardant

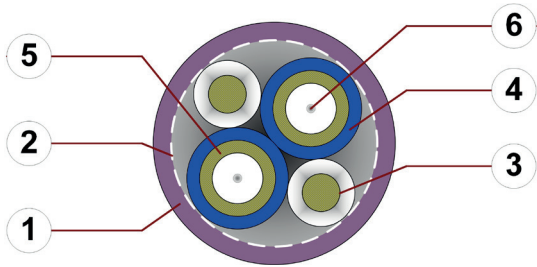

1. Outer jacket: Pressure extruded PVC mixture
2. Banding: Plastic fleece
3. Filler: Aramid damper for high tensile stresses
4. Fibre tube: LSZH („Low smoke & zero halogen“) Material
5. Reinforcement: Extremely bending- and torsion-stable aramid wrapping
6. Fibre: Glass optical fibre (GOF)

Example image
For detailed overview please see design table

Cable structure

	Fibre	50/125 µm, 62.5/125 µm especially bending-resistant solid glass fibre optic cores, with aramid strain relief elements.
	Core structure	FOC cores wound with a short pitch length with high-tensile aramid dampers.
	Core identification	FOC cores: Orange or blue with black numbers.
	Outer jacket	Low-adhesion PVC mixture, adapted to suit the requirements in e-chains®. Colour: Jet black (similar to RAL 9005) Printing: white

„00000m“* igus chainflex CFLG88.2.--① -----② CE RoHS-II conform

www.igus.de +++ chainflex cable works +++

* **Length printing:** Not calibrated. Only intended as an orientation aid.
① / ② Cable identification according to Part No. (see technical table).
Example: ... chainflex CFLG88.2.50/125 2x50/125 ...



09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

Data sheet

chainflex® CFLG88



Fibre Optic Cable (Class 3.1.1.1) ● Graded index glass-fibre cable for flexing applications
● PVC outer jacket ● Flame retardant

Dynamic information

	Bend radius	e-chain® linear flexible fixed	min. 7.5 x d min. 6 x d min. 4 x d
	Temperature	e-chain® linear flexible fixed	+5 °C up to +70 °C -5 °C up to +70 °C (following DIN EN 60811-504) -15 °C up to +70 °C (following DIN EN 50305)
	v max.	unsupported	3 m/s
	a max.		20 m/s ²
	Travel distance		Unsupported travel distances up to 10 m, Class 1

These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

Guaranteed service life according to guarantee conditions

Double strokes	1 million	3 million	5 million
Temperature, from/to [°C]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]
+5/+15	10	11	12
+15/+60	7.5	8.5	9.5
+60/+70	10	11	12

Minimum guaranteed service life of the cable under the specified conditions.
The installation of the cable is recommended within the middle temperature range.



Example image

09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

Data sheet

chainflex® CFLG88



Fibre Optic Cable (Class 3.1.1.1) ● Graded index glass-fibre cable for flexing applications
● PVC outer jacket ● Flame retardant

Properties and approvals

	Flame retardant	According to IEC 60332-1-2
	Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
	UL verified	Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
	REACH	In accordance with regulation (EC) No. 1907/2006 (REACH)
	Lead-free	Following 2011/65/EC (RoHS-II/RoHS-III)
	Cleanroom	According to ISO Class 1. The outer jacket material of this series complies with CF240.02.24 - tested by IPA according to standard DIN EN ISO 14644-1
	CE	Following 2014/35/EU




igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Typical lab test setup for this cable series

Test bend radius R	approx. 75 - 225 mm
Test travel S	approx. 1 - 15 m
Test duration	minimum 2 - 4 million double strokes
Test speed	approx. 0.5 - 2 m / s
Test acceleration	approx. 0.5 - 1.5 m / s ²

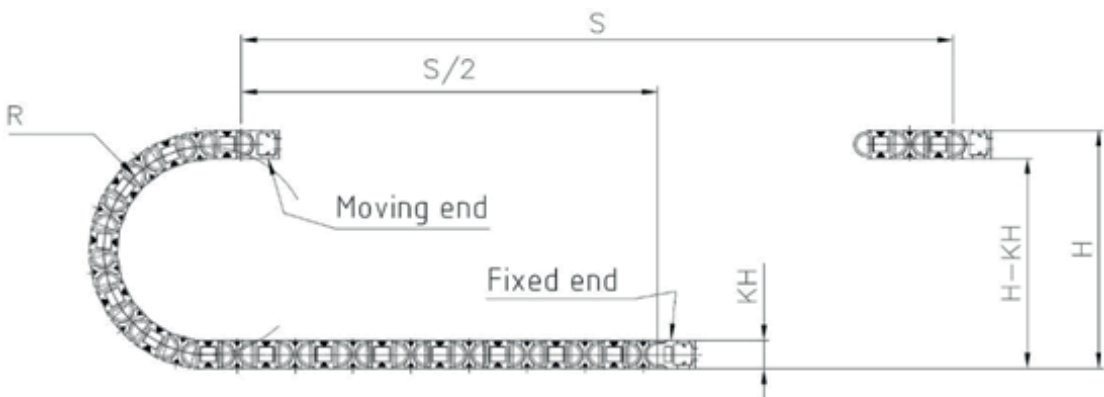

Typical application areas

- For flexing applications, Class 3
- Especially for unsupported travels, Class 1
- Without influence of oil, Class 1
- No torsion, Class 1
- Highest EMC safety
- Preferably indoor applications
- Wood/stone processing, Packaging industry, supply systems, Handling, adjusting equipment

Example image

igus® chainflex® CFLG88

09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

3/4



HENNLICH -
ŽÍJEME TECHNIKOU

o.z. LIN-TECH HENNLICH s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech

Data sheet

chainflex® CFLG88



Fibre Optic Cable (Class 3.1.1.1) ● Graded index glass-fibre cable for flexing applications
● PVC outer jacket ● Flame retardant

Technical tables:

Mechanical information

Part No.	Number of fibres/Fibre diameter/ Conductor nominal cross section	Outer diameter (d) max. [mm]	Weight [kg/km]
Multimode (Graded index)			
CFLG88.2.50/125	2x50/125	7.0	44
CFLG88.2.62.5/125 ¹¹⁾	2x62,5/125	7.0	44

¹¹⁾ Phase-out model

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.

Optical features

Fibre diameter [μm]	Wave length [nm]	Bandwidth [MHz x km] [MHz x km]	Attenuation [dB/km] [dB/km]
50/125	850	≥ 500	≤ 3,0
50/125	1300	≥ 500	≤ 1,0
62.5/125	850	≥ 200	≤ 3,5
62.5/125	1300	≥ 500	≤ 1,5

Design table

Fibre diameter: 50/125

Art.-Nr. (Aderanzahl)	Core design
CFLG88.2.50/125 (2x50/125)	

Fibre diameter: 62.5/125

Art.-Nr. (Aderanzahl)	Core design
CFLG88.2.62.5/125 (2x62,5/125)	



Example image

igus® chainflex® CFLG88

09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

4 / 4



HENNLICH -
ŽÍJEME TECHNIKOU

o.z. LIN-TECH HENNLICH s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech