


Data sheet

chainflex® CFROBOT2



Control cable (Class 6.1.3.3) • For torsion applications • PUR outer jacket • Shielded • Oil-resistant and coolant-resistant • Flame retardant • PVC and halogen-free • Notch-resistant • Hydrolysis and microbe-resistant

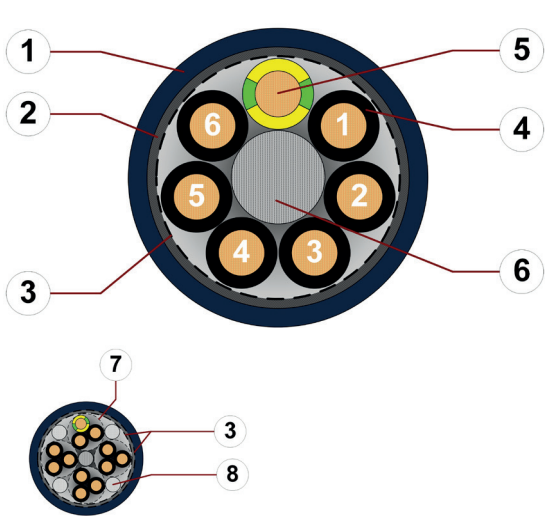

Example image
For detailed overview please see design table

Cable structure

	Conductor	Stranded conductor in especially bending-resistant version consisting of bare copper wires (following DIN EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core identification	Black cores with white numbers, one green-yellow core.
	Overall shield	Extremely torsion-resistant tinned wound copper shield. Coverage optical approx. 85 %
	Outer jacket	Low-adhesion, halogen-free, highly abrasion resistant PUR mixture, adapted to suit the requirements in e-chains® (following DIN EN 50363-10-2) Colour: Steel-blue (similar to RAL 5011) Printing: white

„00000 m** igus chainflex CFROBOT2.--.---① ---② 300/500V E310776

cRUus AWM Style 20317 VW-1 AWM I/II A/B 80°C 300V FT1 EAC/CTP

CE RoHS-II conform www.igus.de +++ chainflex cable works +++

* **Length printing:** Not calibrated. Only intended as an orientation aid.
① / ② Cable identification according to Part No. (see technical table).
Example: chainflex **CFROBOT2.07.04.C (4G0.75)C**



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.



HENNlich -
ŽIJEME TECHNIKOU

o.z. LIN-TECH HENNlich s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech

Data sheet

chainflex® CFROBOT2



Control cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Dynamic information

	Bend radius	e-chain® twisted flexible fixed	min. 10 x d min. 8 x d min. 5 x d
	Temperature	e-chain® twisted flexible fixed	-25 °C up to +80 °C -40 °C up to +80 °C (following DIN EN 60811-504) -50 °C up to +80 °C (following DIN EN 50305)
	v max.	twisted	180 °/s
	a max.	twisted	60 °/s ²
	Travel distance	Robots and 3D movements, Class 1	

These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

Guaranteed service life according to guarantee conditions

Cycles	5 million	7.5 million	10 million
Temperature, from/to [°C]	Torsion max. [°/m]	Torsion max. [°/m]	Torsion max. [°/m]
-25/-15	±150	±90	±30
-15/+70	±180	±120	±60
+70/+80	±150	±90	±30

Minimum guaranteed service life of the cable under the specified conditions.
The installation of the cable is recommended within the middle temperature range.

Electrical information

	Nominal voltage	300/500 V (following DIN VDE 0298-3) 300 V (following UL)
	Testing voltage	2000 V (following DIN EN 50395)



Example image

09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

2/6



HENNLICH -
ŽÍJEME TECHNIKOU

o.z. LIN-TECH HENNLICH s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech

Data sheet

chainflex® CFROBOT2



Control cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant



Properties and approvals

	UV resistance	High
	Oil resistance	Oil-resistant (following DIN EN 50363-10-2), Class 3
	Flame retardant	According to IEC 60332-1-2, FT1, VW-1
	Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
	Halogen-free	Following DIN EN 60754
	UL verified	Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
	UL/CSA AWM	See table UL/CSA AWM for details
	NFPA	Following NFPA 79-2018, chapter 12.9
	EAC	Certificate No. RU C-DE.ME77.B.00300/19 (TR ZU)
	REACH	In accordance with regulation (EC) No. 1907/2006 (REACH)
	Lead-free	Following 2011/65/EC (RoHS-II/RoHS-III)
	Cleanroom	According to ISO Class 1. The outer jacket material of this series complies with CF77. UL.05.12.D - tested by IPA according to standard DIN EN ISO 14644-1
	CE	Following 2014/35/EU

Properties and approvals

UL/CSA AWM Details

Conductor nominal cross section [mm²]	Number of cores	UL style core insulation	UL style outer jacket	UL Voltage Rating [V]	UL Temperature Rating [°C]
0.75	4-18	10493	20317	300	80



09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

Data sheet


chainflex® CFROBOT2



Control cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant


Typical lab test setup for this cable series

Test bend radius R	approx. 75 - 150 mm
Test travel S/S ₂	approx. 1 - 12 m
Test duration	minimum 1.5 - 3 million double strokes
Test speed	approx. 0.5 m/s
Test acceleration	approx. 1.5 m/s ²

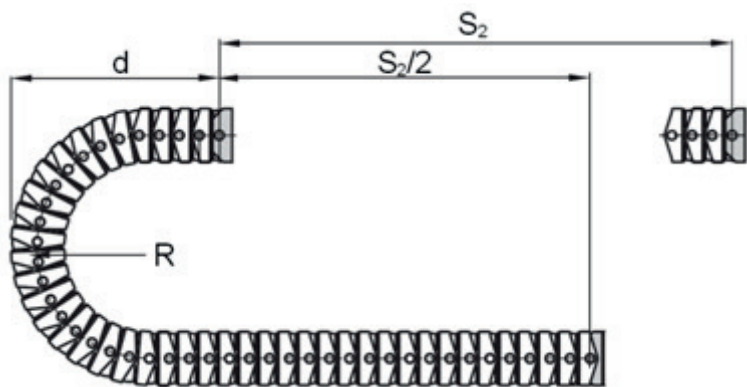

Typical lab test setup (torsion) for this cable series

Torsion range T	±180°/m
Length 3D e-chain®	1 m
Test duration (torsion)	minimum 3 - 5 million cycles
Test speed (torsion)	approx. 80 - 120 °/s
Test acceleration (torsion)	approx. 40°/s ²

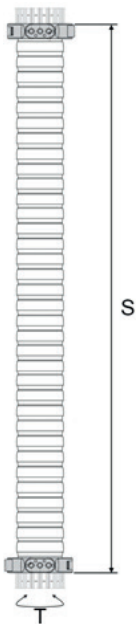

igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image

09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

4/6



HENNlich -
ŽIJEME TECHNIKOU

o.z. LIN-TECH HENNlich s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech

Data sheet

chainflex® CFROBOT2



Control cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Typical application areas

- For heaviest duty applications with torsion movements, Class 6
- Especially for robots and 3D movements, Class 1
- Almost unlimited resistance to oil, Class 3
- Torsion $\pm 180^\circ$, with 1m cable length, Class 3
- Indoor and outdoor applications, UV-resistant
- Robots, Handling, spindle drives

Technical tables:

Part No.	Number of cores and conductor nominal cross section [mm²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CFROBOT2.07.04.C	(4G0.75)C	8.0	43	78
CFROBOT2.07.05.C	(5G0.75)C	8.5	51	90
CFROBOT2.07.07.C	(7G0.75)C	10.0	71	120
CFROBOT2.07.12.C	(12G0.75)C	14.0	122	214
CFROBOT2.07.18.C	(18G0.75)C	16.5	185	301

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core

Electrical information

Conductor nominal cross section [mm²]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Maximum current rating at 30 °C [A]
0.75	27.0	14

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



Example image

09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

Data sheet

chainflex® CFROBOT2



Control cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant



Design table

Part No.	Number of cores	Core design
CFROBOT2.XX.04.C	4	
CFROBOT2.XX.05.C	5	
CFROBOT2.XX.07.C	7	
CFROBOT2.XX.12.C	4x3	
CFROBOT2.XX.18.C	6x3	



09/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.