

Data sheet

chainflex® CFSPECIAL.182





Bus cable for increased tensile load ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Ethernet (CAT5/CAT5e/GigE/PoE)

Profinet (Type C)

CFSPECIAL.182.045

CFSPECIAL.182.060



Example image



02/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.










Data sheet

chainflex® CFSPECIAL.182



Bus cable for increased tensile load ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Cable structure

	Conductor	Stranded conductor in especially bending-resistant version consisting of bare copper wires (following DIN EN 60228).
	Core insulation	According to bus specification.
	Core structure	According to bus specification.
	Core identification	According to bus specification.
	Inner jacket	TPE mixture adapted to suit the requirements in e-chains®.
	Overall shield	Bending-resistant braiding made of tinned copper wires. Coverage approx. 70 % linear, approx. 90 % optical
	Outer jacket	1. outer jacket: PUR mixture adapted to suit the requirements in e-chains®. Reinforcement: High tensile-strength aramid braid embedded in the outer jacket. 2. outer jacket: Low-adhesion, halogen-free PUR mixture, highly abrasion- and bending-resistant, adapted to suit the requirements in hanging applications (following DIN EN 50363-10-2). Colour: Jet black (similar to RAL 9005), Variants ► Product range table Printing: white



„00000 m** igus chainflex CFSPECIAL.182.---① ---② E310776 cЯUus

AWM Style 20233 VW-1 AWM I/II A/B 80°C 300V FT1 EAC CE -----③

RoHS-II conform www.igus.de +++ chainflex cable works +++

* **Length printing:** Not calibrated. Only intended as an orientation aid.

① / ② Cable identification according to Part No. (see technical table).

③ Printing according to bus specification (inclusive wave resistance).

Example: ... chainflex CFSPECIAL.182.001 (2x0.25)C ...

Example image

igus® chainflex® CFSPECIAL.182.060

02/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

2/8



HENNlich -
ŽIJEME TECHNIKOU

o.z. LIN-TECH HENNlich s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech

Data sheet

chainflex® CFSPECIAL.182



Bus cable for increased tensile load ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Properties and approvals

	UV resistance	High
	Oil resistance	Oil-resistant (following DIN EN 50363-10-2), Class 3
	Offshore	MUD-resistant following NEK 606 - status 2009
	Flame retardant	According to IEC 60332-1-2, CEI 20-35, FT1, VW-1
	Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
	Halogen-free	Following DIN EN 60754
	UL/CSA	Style 10138 and 20233, 300 V, 80 °C
	NFPA	Following NFPA 79-2018, chapter 12.9
	EAC	Certificate No. RU C-DE.ME77.B.01218 (TR ZU)
	REACH	In accordance with regulation (EC) No. 1907/2006 (REACH)
	Lead-free	Following 2011/65/EC (RoHS-II)
	CE	Following 2014/35/EU



Dynamic information

	Bend radius	e-chain® linear flexible fixed	min. 10 x d min. 8 x d min. 5 x d
	Temperature	e-chain® linear flexible fixed	-25 °C up to +80 °C -40 °C up to +80 °C (following DIN EN 60811-504) -50 °C up to +80 °C (following DIN EN 50305)
	v max.	unsupported gliding	10 m/s 6 m/s
	a max.		100 m/s ²
	Travel distance		For hanging applications up to 50 m

These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

Example image
igus® chainflex® CFSPECIAL.182.060

02/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

Data sheet


chainflex® CFSPECIAL.182



Bus cable for increased tensile load ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Typical lab test setup for this cable series

Test bend radius R	approx. 63 - 100 mm
Test travel S	ca. 1 - 15 m
Test duration	min. 2 - 4 Millionen Doppelhübe
Test speed	ca. 0,5 - 2 m / s
Test acceleration	ca. 0,5 - 1,5 m / s ²

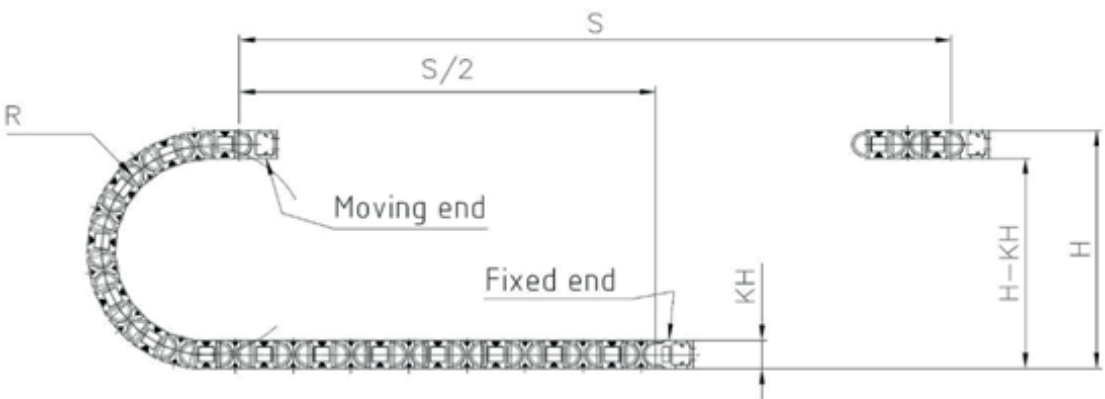

Typical application areas

- For increased tensile load
- Almost unlimited resistance to oil, Class
- For hanging applications up to 50 m
- Storage and retrieval units for high-bay warehouses, hanging control units, Elevators

Technical tables:

Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm ²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
Ethernet/CAT5				
CFSPECIAL.182.045	(4x(2x0.15))C	10.0	41	138
Profinet				
CFSPECIAL.182.060 ¹³⁾	(4x0.38)C	8.5	36	121

¹³⁾ Colour outer jacket: Yellow-green (similar to RAL 6018)

G = with green-yellow earth core

x = without earth core

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.



Example image

02/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

4/8



HENNlich -
ŽÍJEME TECHNIKOU

o.z. LIN-TECH HENNlich s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech

Data sheet

chainflex® CFSPECIAL.182




Bus cable for increased tensile load ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Ethernet (CAT5/CAT5e/GigE/PoE) CFSPECIAL.182.045

Cable structure

(Electrical information please see next page)

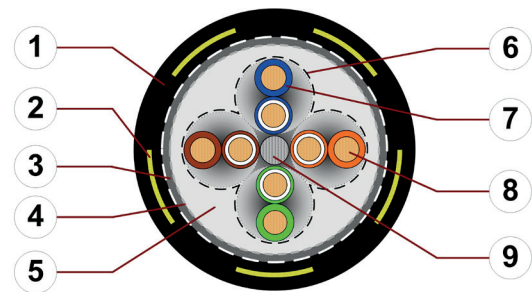

Example image
For detailed overview please see design table

- 1. Outer jacket: Pressure extruded PUR mixture
- 2. Reinforcement: Tensile strength aramid braiding (embedded in the outer jacket)
- 3. Overall shield: Bending-resistant braiding made of tinned copper wires
- 4. Shield foil: Aluminium clad PE foil
- 5. Inner jacket: Pressure extruded, gusset-filling TPE mixture
- 6. Banding: Plastic fleece
- 7. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
- 8. Conductor: Fine-wire strand in especially bending-stable version consisting of bare copper wires
- 9. Strain relief: Tensile stress-resistant centre element wrapped with aramid

Design table

Part No.	Core group	Colour code	Core design
CFSPECIAL.182.045	(4x(2x0.15))C	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown	



Example image

02/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.



Data sheet

chainflex® CFSPECIAL.182



Bus cable for increased tensile load ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Ethernet (CAT5/CAT5e/GigE/PoE)
CFSPECIAL.182.045

Electrical information

(Cable structure please see previous page)

Part No.	CFSPECIAL.182.045
Nominal voltage	50 V
Testing voltage (following DIN EN 50289-1-3)	500 V
Characteristic wave impedance (following DIN EN 50289-1-11)	100 ± 10 Ω (1-100 MHz)
Operating capacity	60 pF/m
Nominal Velocity of Propagation (NVP)	67 %

Line attenuation approx. [dB/100m]

Part No.	1 MHz	10 MHz	20 MHz	100 MHz
CFSPECIAL.182.045	4.2	13.7	19.2	40.5

Conductor nominal cross section	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2)	Maximum current rating at 30 °C (following DIN VDE 0298-4)
[mm²]	[Ω/km]	[A]
0.15	111	2.5

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.

Part No.	Bus type	Link class	Maximum transmission length
CFSPECIAL.182.045	Ethernet/CAT5	Class D - (Data applications up to 100 MHz)	60 m



Example image

igus® chainflex® CFSPECIAL.182.060

02/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

Data sheet

chainflex® CFSPECIAL.182




Bus cable for increased tensile load ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Profinet (Type C)

CFSPECIAL.182.060

Cable structure

(Electrical information please see next page)

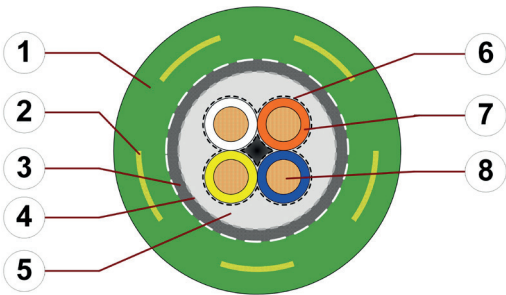

- 1. Outer jacket: Pressure extruded PUR mixture
- 2. Reinforcement: Tensile strength aramid braiding (embedded in the outer jacket)
- 3. Overall shield: Bending-resistant braiding made of tinned copper wires
- 4. Shield foil: Aluminium clad PE foil
- 5. Inner jacket: Pressure extruded, gusset-filling TPE mixture
- 6. Banding: Plastic fleece
- 7. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
- 8. Conductor: Fine-wire strand in especially bending-stable version consisting of bare copper wires

Example image
For detailed overview please see design table

Design table

Part No.	Core group	Colour code	Core design
CFSPECIAL.182.060	(4x0.38)C	white, orange, blue, yellow (Star-quad)	



Example image

02/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.



Data sheet

chainflex® CFSPECIAL.182



Bus cable for increased tensile load ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Profinet (Type C)

CFSPECIAL.182.060

Electrical information

(Cable structure please see previous page)

Part No.	CFSPECIAL.182.060
Nominal voltage	50 V
Testing voltage (following DIN EN 50289-1-3)	500 V
Characteristic wave impedance (following DIN EN 50289-1-11)	100 ± 15 Ω (1-100 MHz)
Operating capacity	50 pF/m
Nominal Velocity of Propagation (NVP)	66 %

Line attenuation approx. [dB/100m]

Part No.	1 MHz	10 MHz	20 MHz	100 MHz
CFSPECIAL.182.060	2.4	7.6	10.7	24.0

Conductor nominal cross section	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2)	Maximum current rating at 30 °C (following DIN VDE 0298-4)
[mm²]	[Ω/km]	[A]
0.38	51	7

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



Example image

02/2020

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

