

Submersible drainage pump with cooling jacket
for drainage water containing solids
Free passage 20 und 30 mm.

CR360 - 372V

Application

Pump for conveying soiled water, also containing coarse solids and fibre content up to 20 or 30 mm diameter. Compact, lightweight and robust stainless steel design, ideal for drainage water disposal in the home or as a portable emergency pump for example in case of flooding. A cooling jacket with discharge connector at the top ensures sufficient motor cooling even at low water level (sip operation).

DIN EN 12050-2: Design tested and monitored.

Installation: Stationary or mobile. Version with float switch for use as automatic water level controlled drainage pump.

Pumped medium: Clear- or drainage water containing solids up to 20 or 30 mm particle size. Max. temperature of pumped medium: 35°C, for brief periods up to 60°C.

Operating mode: Intermittent operation.

Design

Submersible pump, consisting of:


Pump: Single-stage stainless steel centrifugal pump with cooling jacket and vertical discharge.

Impeller: Vortex impeller, free passage 20 or 30 mm.

Motor: Single-phase electric motor. Thermal sensor for temperature monitoring in the winding. Insulation class F. Protection rating IP 68. Stainless steel motor shaft, pre-lubricated bearings.

Shaft seal: Combination of mechanical and lip seal.

Conveying capacities

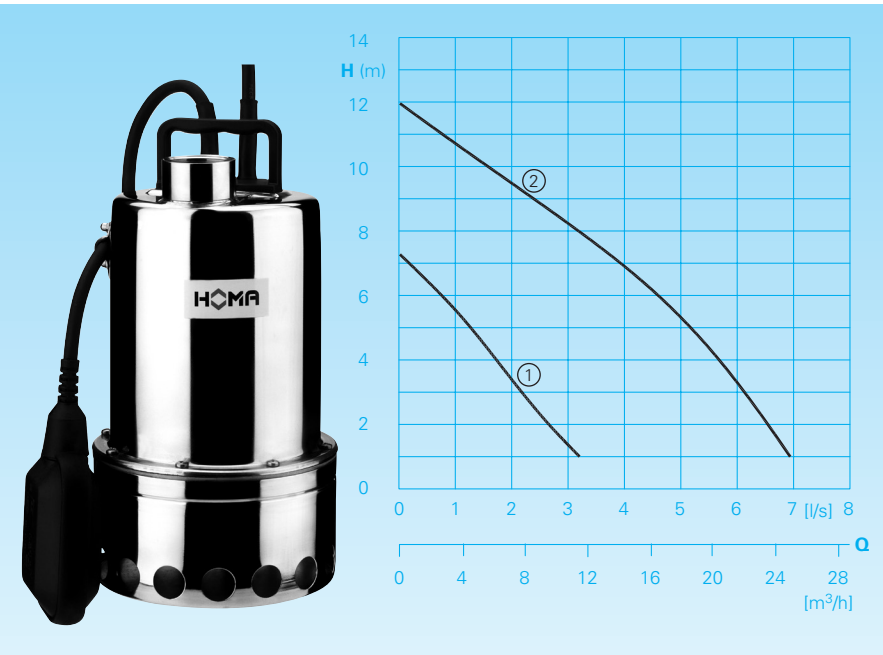

Technical data

Curve No.	Pump type	Motor input P ₁ (kW)	P ₂ (kW)	Voltage 50 Hz (V)	Nominal current (A)	Free passage (mm)	Discharge	Weight (kg)
①	CR360 V W(A)	0,63	0,45	230/1Ph	2,9	20	G1 1/4	6,9
②	CR372 V W(A)	2,2	1,10	230/1Ph	9,5	30	G2	20,0

Rotational speed: 2900 rpm

Model A: with automatic float switch
HOMA-Nivomatik

Materials

Motor housing, motor shaft, pump housing, screws,suction sieve, impeller	Stainless steel 1.4301
Mechanical seal	Carbon graphite Chrome steel
Elastomers	NBR


Scope of supply

Pump with discharge, 10 m of connecting cable and plug.


CR 372: additionally with switchgear, motor protection, ON-OFF-switch and mains plug.

Model A: With automatic float switch HOMA-Nivomatik.


Dimensions and installation example (all dimensions in mm)

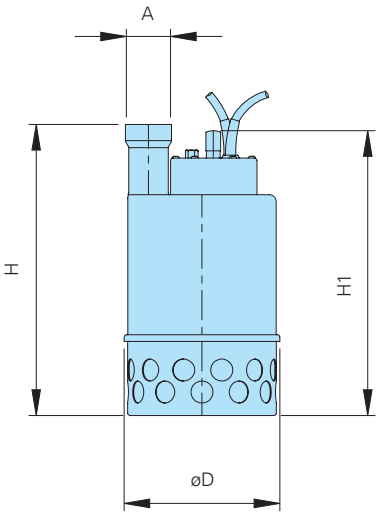

Pump type	A	H	H1	øD
CR360 V	G1 1/4	265	285	154
CR372 V	G2	397	389	212

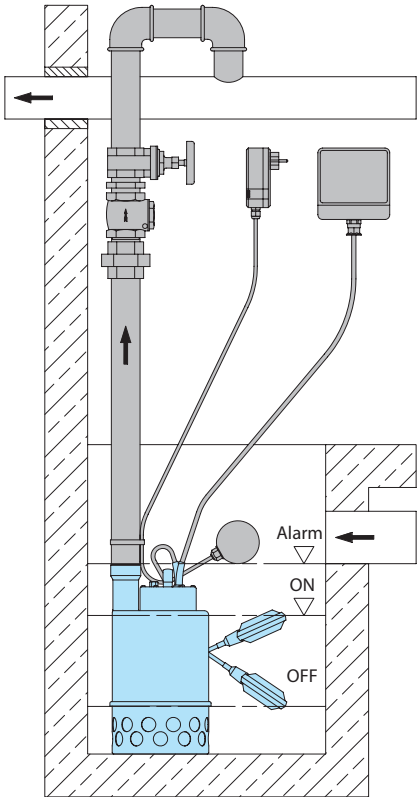

Accessories

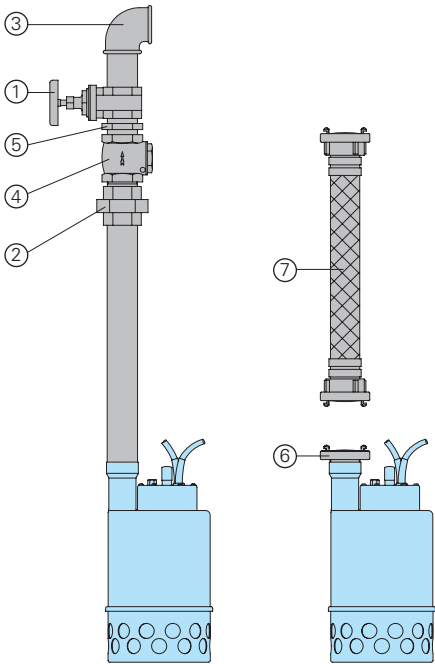

Description	Size	Part no.
① Shut-off gate valve Brass	BSP 1¼" F BSP 1½" F BSP 2" F	2216012 2216015 2216020
② Transition screw connection, galvanized	BSP 1¼" M/F BSP 1½" M/F BSP 2" M/F	2114304 2114305 2114311

Description	Size	Part no.
③ Connection bend 90°, galvanized	BSP 1¼" F BSP 1¼" F/M BSP 1½" F BSP 2" F	2113604 2111405 2113605 2113606
T-piece for merging the pressure pipe in double pump stations, galvanized	BSP 1¼" F BSP 1½" F	2114301 2114302
④ Non-return valve, brass	BSP 1¼" F BSP 1½" F BSP 2" F	2211213 2211313 2211413
⑤ Double nipple, galvanized	BSP 1¼" M	2009011
⑥ STORZ-fixed coupling	C-G 1¼" F C-G 1½" M C-G 2" M	2010001 2010003 2010203
STA- threaded hose fitting, brass	BSP 1¼" BSP 1½"	2001413 2001513
⑦ PVC-hose, per m	1¼" Ø 30 mm 1½" Ø 38 mm	2621200 2621500
Plastic spiral hose, per m	1¼" Ø 32 mm 1½" Ø 38 mm	2632030 2632042
STORZ-hose- coupling	C-52 mm	2013003
Synthetic-pressure- hose, with rubber lining, complete with C-couplings	10 m long 15 m long 20 m long 30 m long	2611310 2611315 2611320 2611330
Hose clamp	1¼" 1½" 2"	2303252 2304854 2306009

Description	Size	Part no.
HOMA-Nivomatik float switch level control conversion unit - for 230 V/ 1 Ph AZW 10/5 AZW 10/10	5 m of cable 1435055 10 m of cable 1435105	
○ Fault-current circuit breaker 2-pin, Fi 16/0.03 A		1561160
○ Mains-dependent alarm control unit AL3 with connector for 9 V rechargeable battery (see below) for operation independent of mains power supply, with built-in signal transmitter, float switch and 10 m of cable. Main phase connection 230V/1Ph		1586141
9 V rechargeable battery for mains-independent alarm		1952215
○ For pump controllers and switchgears for mobile and stationary applications, measuring systems and monitoring devices	see HOMA accessories	



We reserve the right to alter our specifications without notice!

HOMA Pumpenfabrik GmbH | Industriestraße 1, D-53819 Neunk.-Seelscheid | Tel. +49 (0) 22 47 / 702-0, Fax +49 (0) 22 47 / 702-44 | info@homa-pumpen.de | www.homapumps.com



HENNLICH -
ŽIJEME TECHNIKOU

o.z. HYDRO-TECH HENNLICH s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 222
E-mail: hydro-tech@hennlich.cz

www.hennlich.cz/hydro-tech