


xiros® conveyor roller

Conveyor roller with hard-anodised aluminium tube

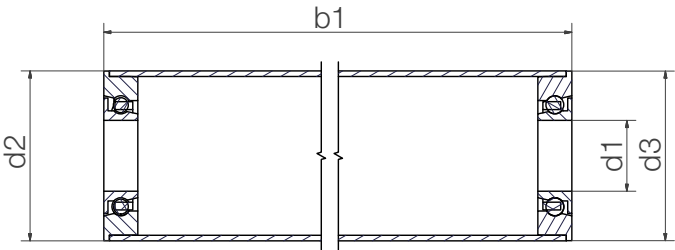

Corrosion-resistant

Hard-anodising ensures the best values in terms of wear and corrosion resistance. In addition, the conveyor rollers are characterised by low frictional resistance.

- Wear-resistant; offers excellent surface protection
- Longer maintenance intervals
- Tested in the xiros® test laboratory
- igus® has been an investor in Mura Technology from the very beginning, and is advancing chemical recycling. From plastic waste to crude oil in 20 minutes:

igus.eu/hydropres

Product range

Part No.	Inner Ø d1 [mm]	Outer Ø d2 [mm]	Flange Ø d3 [mm]	Length b1 [mm]
BBT-AHA20-606-B180-30-ES	6	20	20	50 - 500
BBT-AHA20-688-B180-30-ES	8	20	20	50 - 500
BBT-AHA30-608-B180-30-ES	8	30	30	50 - 1,500
BBT-AHA30-6000-B180-30-ES	10	30	30	50 - 1,500
BBT-AHA30-6001-B180-30-ES	12	30	30	50 - 1,500
BBT-AHA38-6000-B180-30-ES	10	38	38	50 - 1,500
BBT-AHA38-6001-B180-30-ES	12	38	38	50 - 1,500
BBT-AHA38-6002-B180-30-ES	15	38	38	50 - 1,500
BBT-AHA38-6003-B180-30-ES	17	38	38	50 - 1,500
BBT-AHA50-6004-B180-30-ES	20	50	50	50 - 1,500
BBT-AHA60-6004-B180-30-ES	20	60	60	50 - 1,500