




KITO

Armaturen GmbH

## Type sheet

Deflagration proof vacuum relief valve



KITO® VS/cont. ...



### Application

Explosion proof end-of-line vacuum relief valve for storage tanks, vessels and pipes to prevent inadmissible vacuum. Approved for flammable liquids of explosion group IIB3 (MESG)  $\geq 0.65$  mm. An maximum operating temperature of 60 °C must not be exceeded. Suitable also for portable tanks for the transport of flammable liquids.

### Dimensions (mm) and settings (mbar)

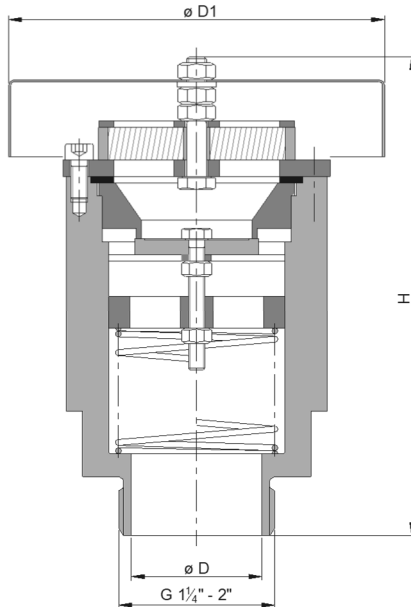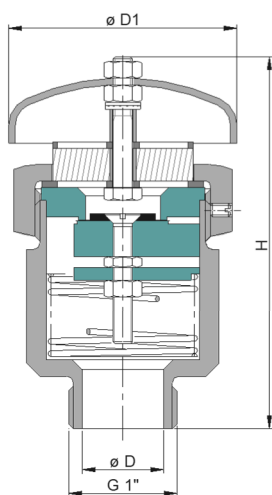

	D	D1	H	kg	setting
G 1”	25	70	110	1	5 - 210
G 1 ¼“	32	115	145	3	
G 1 ½“	40				
G 2”					

Weight refers to the standard design

### Design

	size G 1"	size G 1 1/4", G 1 1/2", G 2"
housing	stainless steel mat. no. 1.4571	
KITO®-flame arrester element	completely interchangeable	
KITO®-casing / KITO®-grid	stainless steel mat. no. 1.4571	
valve seat / valve pallet	PTFE	stainless steel mat. no. 1.4571
sealing	FEP	PTFE
compression spring	stainless steel mat. no. 1.4571	
weather hood	stainless steel mat. no. 1.4301	stainless steel mat. no. 1.4571
connection	threaded format	

### Example for order

KITO® VS/cont. 2"

(design with threaded connection G 2")

**Type examination certificate to EN ISO 16852 and CE-marking in accordance to ATEX-Directive 2014/34/EU**

page 1 of 2

KITO Armaturen GmbH  
Grotrian-Steinweg-Str. 1c  
D-38112 Braunschweig  
VAT Reg.No DE812887561

+49 (0) 531 23000-0  
+49 (0) 531 23000-10  
www.kito.de  
info@kito.de

**M 8 N / D 8 N**

Date: 05-2018  
Created: Abt. Doku KITO  
Design subject to change



HENNLICH -  
ŽIJEME TECHNIKOU

o.z. HYDRO-TECH HENNLICH s.r.o.  
Českolipská 9, 412 01 Litoměřice


Telefon: +420 416 711 222  
E-mail: hydro-tech@hennlich.cz

www.hennlich.cz/hydro-tech

Type sheet

Deflagration proof vacuum relief valve

KITO® VS/cont. ...



Performance curves

The flow capacity V refers to a density of air with  $\rho = 1.29 \text{ kg/m}^3$ . The flow capacity for gases with different densities can be calculated sufficiently accurate by the following approximation equation:

$$\dot{V}_{40\%} = \dot{V}_b \cdot \sqrt{\frac{\rho_b}{1.29}} \quad \text{or} \quad \dot{V}_b = \dot{V}_{40\%} \cdot \sqrt{\frac{1.29}{\rho_b}}$$

