


## Type sheet


Pressure and deflagration proof vacuum relief valve  
**KITO® VD/KGV-PA-IIB3-...**



### Application

As end-of-line armature, for venting apertures on tank installations. Tested and approved against atmospheric deflagrations for all materials of the explosion group IIB3 with a maximum experimental safe gap (MESG)  $\geq 0.65$  mm and an maximum operating temperature of 60 °C. Used mainly as venting and breather device for fixed roof tanks. Used to prevent inadmissible pressure and vacuum and to minimize unwelcome gas losses or inadmissible emissions respectively. The housing is mounted perpendicularly on a tank roof. The product vapours can be discharged through a collective line into the atmosphere connected to the line flange on the pressure side. This pipeline must be secured individually.

### Dimensions (mm) and settings (mbar)

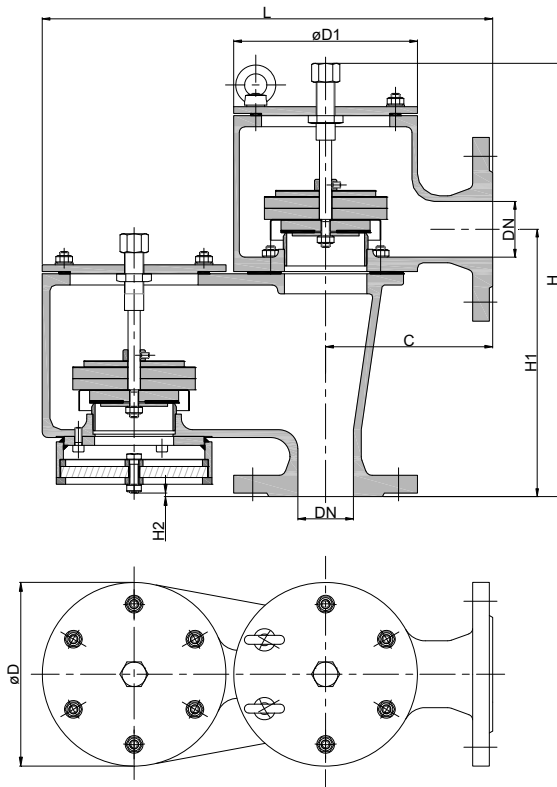

DN DIN	ASME	C	D	D1	H	H1	H2	L	kg	setting	
										vacuum	pressure
50 PN 16	2"	150	165	165	389	240	3	405	2-60	2-60	
80 PN 16	3"	180	200	192	487	300		480			
100 PN 16	4"	200	250	240	547	330		600			
150 PN 16	6"	250	350	350	655	390		805			
200 PN 10	8"	300	400	390	775	480	12	925			
250 PN 10	10"	305	460	460	875	555		1010			
300 PN 10	12"	305	460	460	875	582		1010			

Indicated weights are understood without weight load and refer to the standard design

### Example for order


**KITO® VD/KGV-PA-IIB3-50**  
 (design DN 50 with flange connection DN 50 PN 16)

**Type examination certificate to EN ISO 16852 and CE-marking in accordance to ATEX-Directive 2014/34/EU**

page 1 of 2

## Type sheet

Pressure and deflagration proof vacuum relief valve  
**KITO® VD/KGV-PA-IIB3-...**



### Design

	standard	optionally
housing upper part (PN 1)	cast steel mat. no. 1.0619	stainless cast steel mat. no. 1.4408
housing lower part	cast steel mat. no. 1.0619 / steel	stainless cast steel mat. no. 1.4408 / 1.4571
cover	steel	stainless steel mat. no. 1.4301
gasket	PTFE	
valve seat	stainless steel mat. no. 1.4571	
KITO®-flame arrester element	interchangeable	
KITO®-casing / KITO®-grid	stainless steel mat. no. 1.4571 / 1.4310	stainless steel mat. no. 1.4571 / 1.4571
flange connection	EN 1092-1 type B1	ASME B16.5 Class 150 RF

### Design valve pallet

design	pressure range I 2 - < 3.5 mbar	pressure range II ≥ 3.5 - 14 mbar	pressure range III > 14 - 35 mbar	pressure range IV > 35 - 60 mbar
pallet	aluminum	stainless steel mat. no. 1.4571	stainless steel mat. no. 1.4571	stainless steel mat. no. 1.4571
valve spindle	aluminum / stainless steel mat. no. 1.4571	stainless steel mat. no. 1.4571	stainless steel mat. no. 1.4571	stainless steel mat. no. 1.4571
valve sealing	FEP & HD3822	FEP & HD3822	PTFE	PTFE

### Performance curves

Flow capacity V based on air of a density  $\rho = 1.29 \text{ kg/m}^3$  at  $T = 273 \text{ K}$  and atmospheric pressure  $p = 1.013 \text{ mbar}$ . For other gases the flow can be approximately calculated by

$$\dot{V}_{20\%} = \dot{V}_b \cdot \sqrt{\frac{\rho_b}{1.29}} \quad \text{or} \quad \dot{V}_b = \dot{V}_{20\%} \cdot \sqrt{\frac{1.29}{\rho_b}}$$

The indicated flow rates will be reached by an accumulation of 20 % above valve's setting. If the allowable overpressure is less 40%, please consult der factory for the corrected volume flow.

