



Version E | Series E04 | "easy" design, split crossbar along the outer radius



| Part No.                 | Bi   | Ba*  | R Available bend radii      | Weight |
|--------------------------|------|------|-----------------------------|--------|
| Version E                | [mm] | [mm] | [mm]                        | [kg/m] |
| E04.07.R.0 <sup>1)</sup> | 7    | 13   | 015   018   028   038   048 | ≈ 0.08 |

1) Crossbars do not overlap. Gap = 2.5mm Special solution with opening gap 0.8mm: Part No. E04.07.015.0.S

Ba\*: pin dimension approx. 0.1 - 0.3mm wider.


Complete Part No. with required radius (R). Example: E04.07.028.0

Installation dimensions

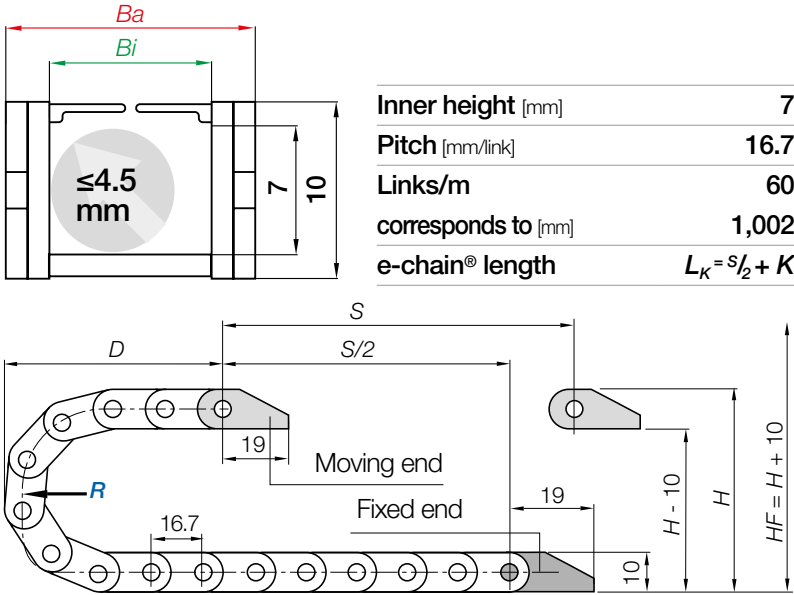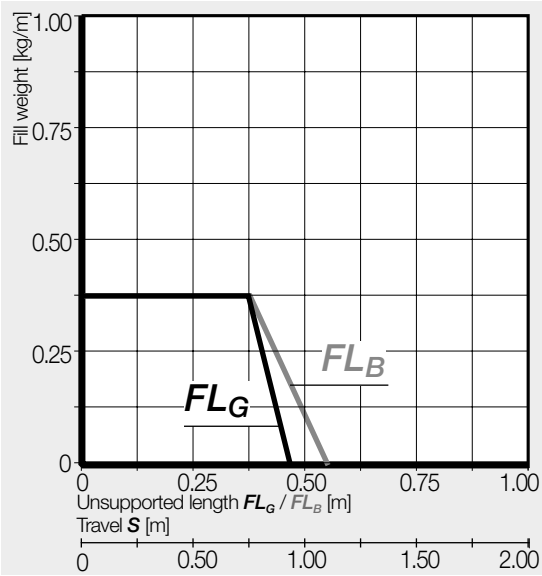

| R | 015 | 018 | 028 | 038 | 048 |
|---|-----|-----|-----|-----|-----|
| H | 40  | 46  | 66  | 86  | 106 |
| D | 45  | 48  | 58  | 68  | 78  |
| K | 85  | 90  | 125 | 155 | 185 |

The required clearance height:  $H_F = H + 10\text{mm}$  (with 0.1kg/m fill weight)

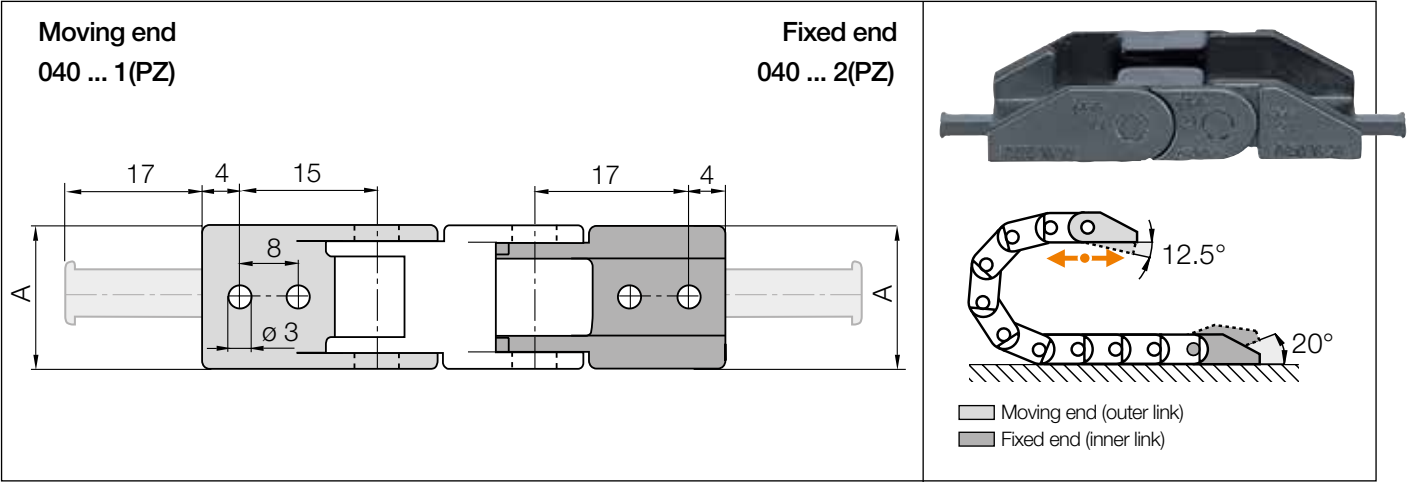


| Width index | Part No. full set with tiewrap plates* | Part No. full set without tiewrap plates | A [mm] | Number of teeth |
|-------------|----------------------------------------|------------------------------------------|--------|-----------------|
| .07. ►      | 040.07.12PZ                            | 040.07.12                                | 12     | 1               |

\*040.07.12PZ only installation versions A2 and A4

Material mounting bracket - igumid G, temperature: -40° up to +120°C, VDE 0304 IIC UL94-HB

Mounting bracket with strain relief tiewrap plate has reductions of ø 3mm

Mounting bracket without strain relief tiewrap plate only has holes of ø 3mm

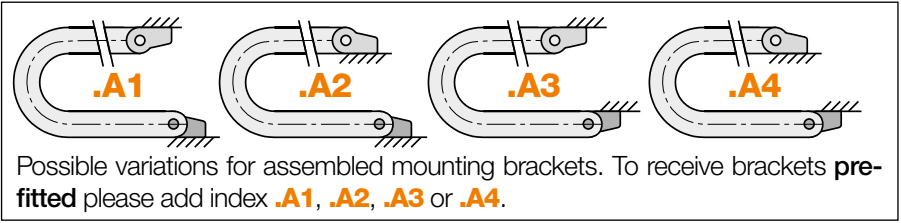

**040.07.12PZ.A2** Order example  
.A... to indicate option with brackets pre-fitted  
With integrated strain relief tiewrap plates  
Full set  
Series