


2 + 3 chamber design
Inner height: 37.1

Version E | Series E26 | "easy" design, split crossbar along the outer radius
Version Z | Series Z26 | "easy" design, split crossbar along the inner radius


Chamber design	Part No. Version E	Part No. Version Z	Bi [mm]	Ba [mm]	R Available bend radii [mm]	Weight [kg/m]
1-chamber	E26.07.R.0	Z26.07.R.0	75	92	063 075 100 125 150 175 200 250	≈ 0.96
2-chamber	E26.2/45.R.0	Z26.2/45.R.0	48/48	117	063 075 100 125 150 175 200 250	≈ 1.14
3-chamber	E26.3/45.R.0	Z26.3/45.R.0	47/48/47	167	063 075 100 125 150 175 200 250	≈ 1.30

Complete Part No. with required radius (R). Example: E26.07.150.0

Installation dimensions

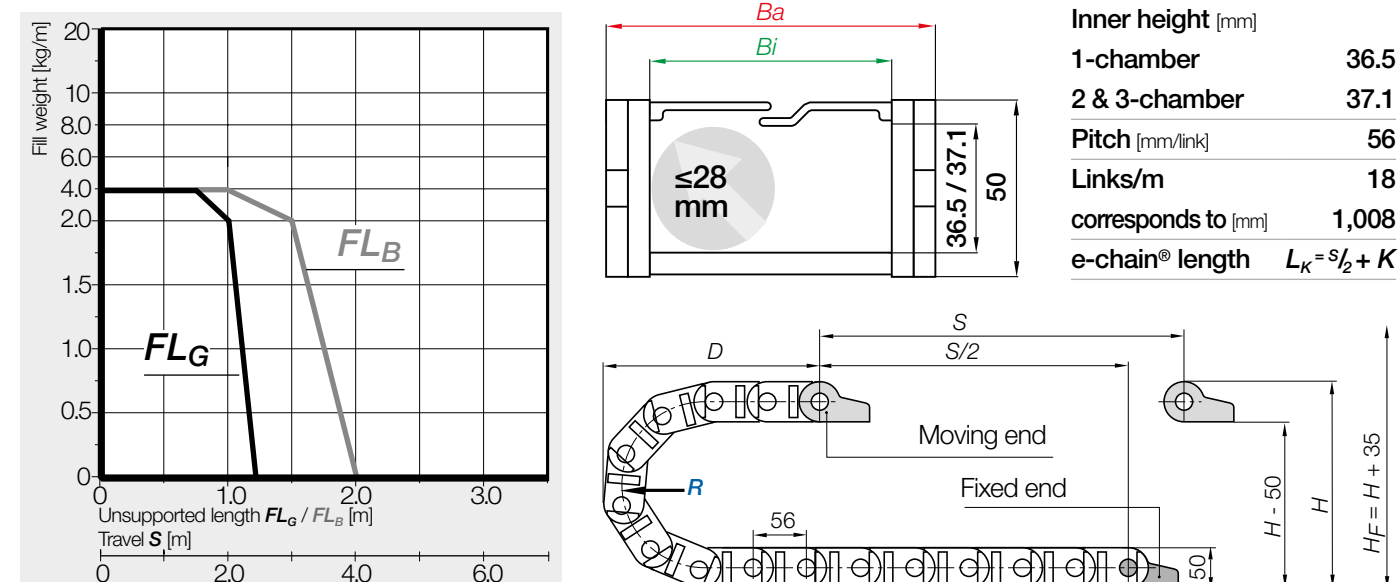


R	063	075	100	125	150	175	200	250
H ⁺⁵	176	200	250	300	350	400	450	550
D	172	184	209	234	259	284	309	359
K	310	350	430	505	585	665	745	900

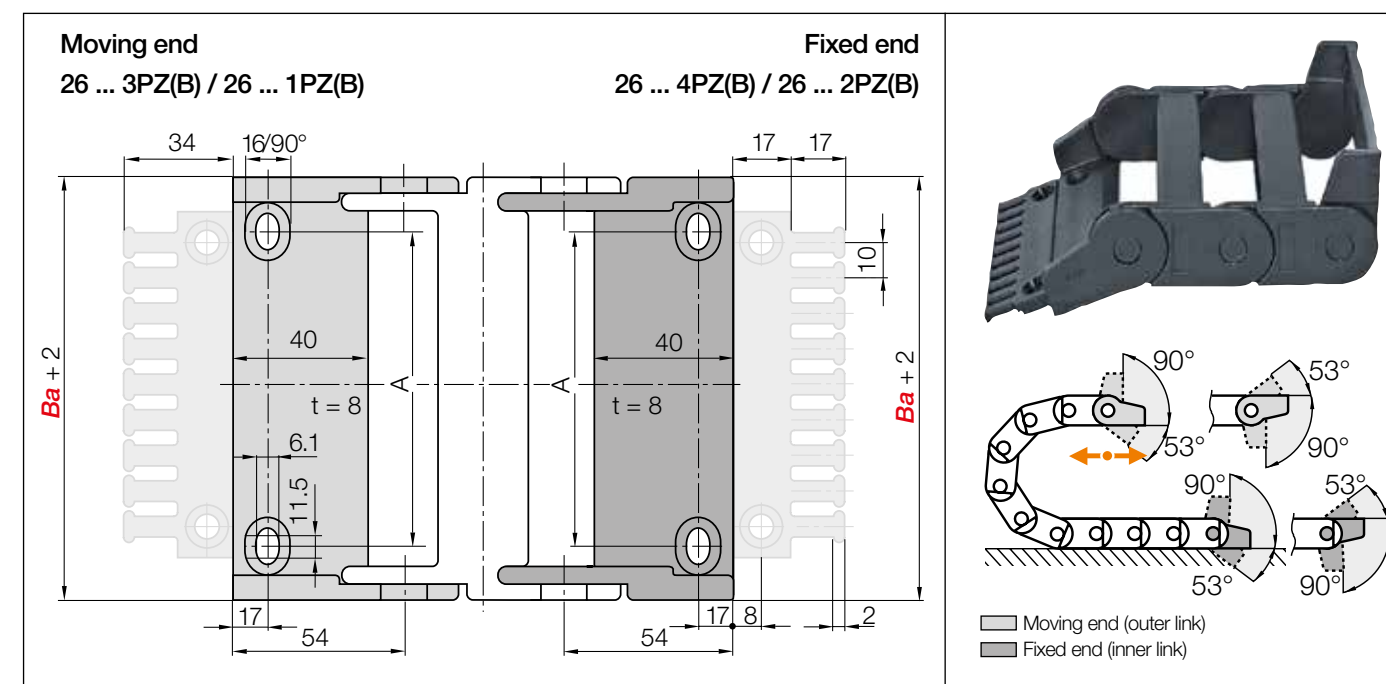The required clearance height: $H_F = H + 35\text{mm}$ (with 2.0kg/m fill weight)236 More information ► www.igus.eu/E26 ► www.igus.eu/Z26

Width index	Part No. full set pivoting with tiewrap plates	Part No. full set pivoting without tiewrap plate	Part No. full set locking with tiewrap plates	Part No. full set locking without tiewrap plate	A [mm]	Number of teeth
07. ►	2607.34PZB	2607.34PZ	2607.12PZB	2607.12PZ	55	7
2/45. ►	2610.34PZB	2610.34PZ	2610.12PZB	2610.12PZ	80	10
3/45. ►	2615.34PZB	2615.34PZ	2615.12PZB	2615.12PZ	130	15

Material mounting bracket - igumid G, temperature: -40° up to +120°C, VDE 0304 IIC UL94-HB

Full set with tiewrap plate + 10 cable tiewraps, please add index K1. Example: 2607.34PZBK1

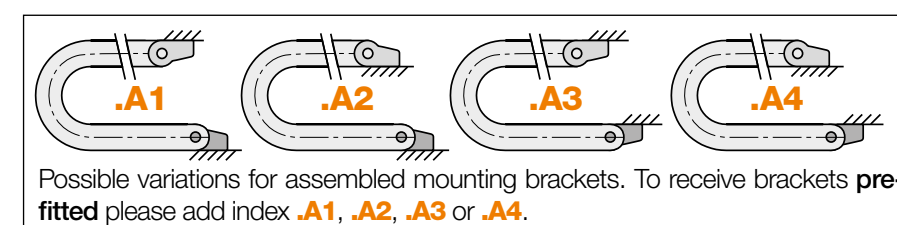

2607.34PZB.A2 Order example
 .A... to indicate option with brackets pre-fitted
 With integrated strain relief tiewrap plates
 Full set
 Series

Strain relief e.g. clamps, tiewrap plates, nuggets and clips are available from stock. The complete chainfix range with ordering options ► From page 1392

igus 3D CAD, configurators, service life calculation and more ► www.igus.eu/easychain

237