





ing the inner and outer radius

	<i>Bi</i>	<i>Ba</i>	E6.62
	[nm]	[nm]	[kg/m]
<i>R</i> .0	212	248	3.78
<i>R</i> .0	225	261	3.83
<i>R</i> .0	237	273	3.873
<i>R</i> .0	250	286	3.91
<i>R</i> .0	262	298	3.95
<i>R</i> .0	275	311	4.00
<i>R</i> .0	287	323	4.04
<i>R</i> .0	300	336	4.09
<i>R</i> .0	312	348	4.13
<i>R</i> .0	325	361	4.17
<i>R</i> .0	337	373	4.21
<i>R</i> .0	350	386	4.26
<i>R</i> .0	362	398	4.30
<i>R</i> .0	375	411	4.35
<i>R</i> .0	387	423	4.39
<i>R</i> .0	400	436	4.43



Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech

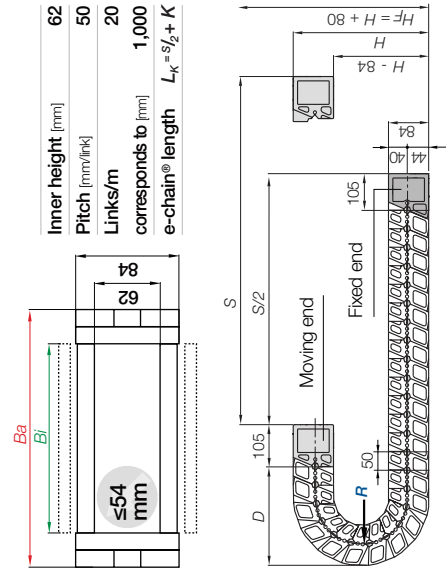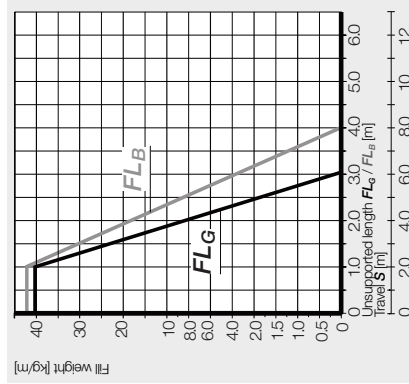

R	115	150	200	250	300	350
H	388	458	558	658	758	858
D	234	269	319	369	419	469
K	465	575	730	890	1,045	1,200

The required clearance height: $H_F = H + 80\text{mm}$ (with 2.0kg/m fill weight)



If a gliding application is required for a long travel, please consult igus®.



Steel support tray for support of the lower run

- Simple one-piece support trays for the lower run
- To your requirements and specification
- 4 options available

● 4 options available
More information ► From page 1356



igus 3D CAD, configurators, service life calculation and more ► www.igus.eu/E6

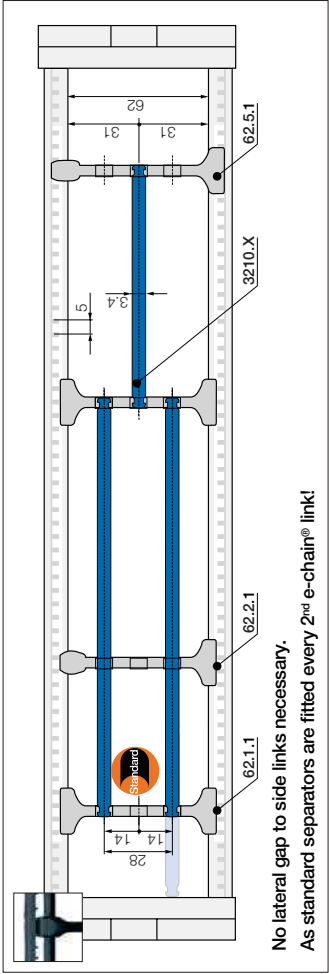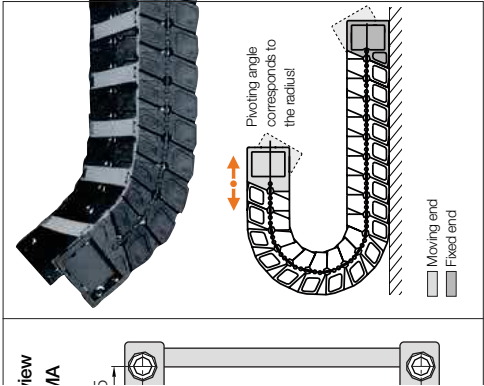

Standard – for any application

Separator with a wide base for maximum holding force.

Applications

Part No. Full set	A	B	Bi
IMA pivoting	[mm]	[mm]	[mm]
6.620. 212.12.C	234	252	212
6.620. 23. 12.C	247	265	225
6.620. 237.12.C	259	277	237
6.620. 25. 12.C	272	290	250
6.620. 262.12.C	284	302	262
6.620. 28. 12.C	297	315	275
6.620. 29. 12.C	309	327	287
6.620. 30. 12.C	322	340	300
6.620. 312.12.C	334	352	312
6.620. 325.12.C	347	365	325
6.620. 337.12.C	359	377	337
6.620. 350.12.C	372	390	350
6.620. 362.12.C	384	402	362
6.620. 375.12.C	397	415	375
6.620. 387.12.C	409	427	387
6.620. 400.12.C	422	440	400

E6.620.10.12.C-A2

Order example

A... to indicate option with brackets pre-fitted

C-profile option

Full set

width index

Series

are available from stock. The complete

2



For even faster installation

Wide on one side for high holding force, narrow on opposite side for easy cable fitting.

Locks securely in preset increments

Notch separator for exact positioning. Recommended for side-mounted applications.
(*Suitable from **Bi 75**)

Horizontal separation

Full-width shelf locks securely into separators at both ends, giving a fixed width. Can be used as full-width or partial shelf.

Shelves

Width = X [mm]



X [mm]	unassembled	assembled	X [mm]	unassembled	assembled
050	3200.050	3210.050	125	3200.125	3210.125
075	3200.075	3210.075	150	3200.150	3210.150
100	3200.100	3210.100	175	3200.175	3210.175
115	3200.115	3210.115	200	3200.200	3210.200