


FOG CANNON HE30

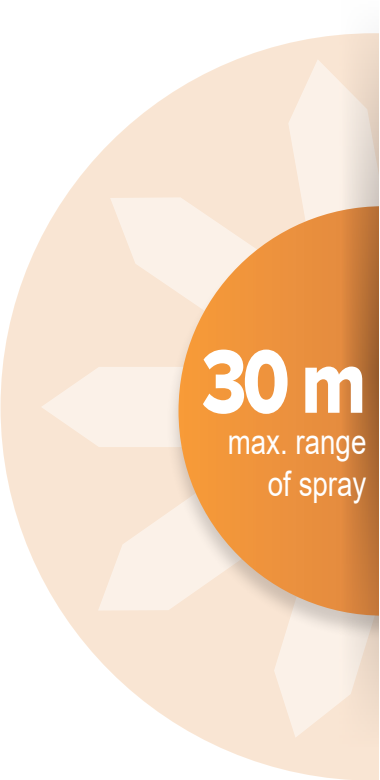

The HE30 cannon is the most sold unit in the HENNLICH fleet. It is a mid-sized unit ideal for certain jobs like demolition & construction works, open stockpiles or port terminals operations.

STANDARD DESIGN

- One stainless steel nozzle ring
- Nozzles made of brass
- Automatic horizontal rotation 0-350°
- Booster pump to control the correct working pressure
- Pressure gauge
- Water filter
- Electric control panel
- Solid metallic cover against the components damage
- Standard mount: skid mounted

ADDITIONAL ACCESSORIES

- Remote control (wireless, min. range 100 m)
- Wheeled trailer
- Electrical vertical elevation (0-35°)
- Chemical additives for dust or odour suppression
- Road trailer with the integrated bowser tank 2000 and the diesel generator

Technical specification	HE30
Throw (windless condition)	20-30 mts
Droplet size	50-150 microns
Engine power (fan)	3,0 kW
Booster pump	1,87 kW
Filter mesh size	350 µm
Horizontal rotation	0-350°
Power supply	3 Phase, 400 V AC, 50 Hz
Water consumption	778 l/h (10 bar)
Water connection	inner thread DN 25
Nozzles q-ty	18 pcs
Weight	277 kg

