


Type sheet

Pressure and deflagration proof vacuum relief valve

KITO® VD/KGV-PA-IIB3-... VD



-End of line device for use in pipeline-



Application

As end-of-line armature, for venting apertures on tank installations. Tested and approved against atmospheric deflagrations for all materials of the explosion group IIB3 with a maximum experimental safe gap (MESG) ≥ 0.65 mm and an maximum operating temperature of 60 °C. Used mainly as venting and breather device for fixed roof tanks. Used to prevent inadmissible pressure and vacuum and to minimize unwelcome gas losses or inadmissible emissions respectively. The housing is mounted perpendicularly on a tank roof. **The product vapours can be discharged through a collective line into the atmosphere connected to the line flange on the pressure side.** This pipeline must be secured individually.

Dimensions (mm) and settings (mbar)

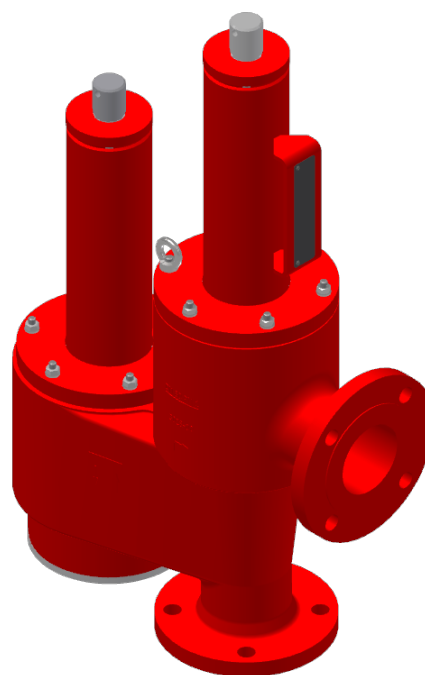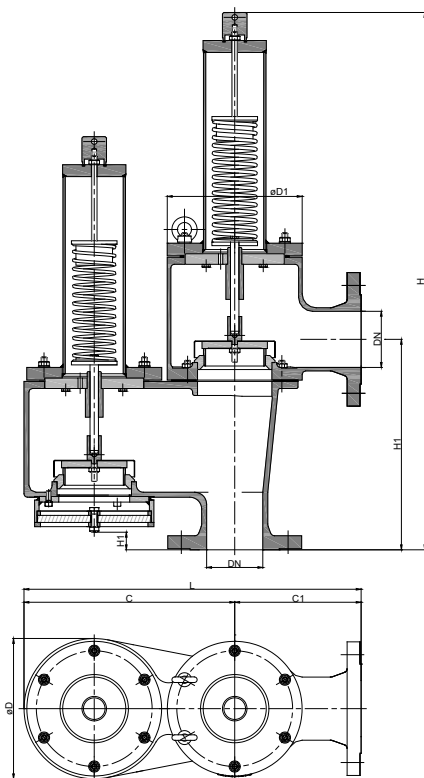

DN	ASME	C	C1	D	D1	H	H1	H2	L	kg	setting	
											vacuum	pressure
50 PN 16	2"	255	150	165	165	604	240	3	405	>60-415	>60-415	
80 PN 16	3"	300	180	200	192	766	300		480			
100 PN 16	4"	400	200	250	240	911	330		600			
150 PN 16	6"	555	250	350	350	1173	390	12	805			
200 PN 10	8"	625	300	400	390	1526	480		925			
250 PN 10	10"	705	305	460	460	1630	555		1010			
300 PN 10	12"	705	305	460	460	1630	582	1010				

Indicated weights are understood without weight load and refer to the standard design

Example for order

KITO® VD/KGV-PA-IIB3-50 VD

(design DN 50 with flange connection DN 50 PN 16)

Type examination certificate to EN ISO 16852 and CE-marking in accordance to ATEX-Directive 2014/34/EU


page 1 of 2

Type sheet

Pressure and deflagration proof vacuum relief valve

KITO® VD/KGV-PA-IIB3-... VD

-End of line device for use in pipeline-



Design

	standard	optionally
housing upper part (PN 1)	cast steel mat. no. 1.0619	stainless cast steel mat. no. 1.4408
housing lower part	cast steel mat. no. 1.0619 / steel	stainless cast steel mat. no. 1.4408 / 1.4571
cover	steel	stainless steel mat. no. 1.4301/1.4571
gasket	PTFE	
design valve pallet	spring loaded	
valve seat	stainless steel mat. no. 1.4571	
valve pallet / valve spindle	stainless steel mat. no. 1.4571	
valve sealing	metal sealing	
spring loaded parts	stainless steel mat. no. 1.4571	
compression spring	stainless steel	
KITO®-flame arrester element	interchangeable	
KITO®-casing / KITO®-grid	stainless steel mat. no. 1.4571 / 1.4310	stainless steel mat. no. 1.4571 / 1.4571
flange connection	EN 1092-1 type B1	ASME B16.5 Class 150 RF

Performance curves

Flow capacity V based on air of a density $\rho = 1.29 \text{ kg/m}^3$ at $T = 273 \text{ K}$ and atmospheric pressure $p = 1.013 \text{ mbar}$. For other gases the flow can be approximately calculated by

$$\dot{V}_{20\%} = \dot{V}_b \cdot \sqrt{\frac{\rho_b}{1.29}} \quad \text{or} \quad \dot{V}_b = \dot{V}_{20\%} \cdot \sqrt{\frac{1.29}{\rho_b}}$$

The indicated flow rates will be reached by an accumulation of 20 % above valve's setting. If the allowable overpressure is less than 20%, please consult the factory for the corrected volume flow.

