

E2 mini | Series F17 | Product range

Large inner height, small outer width, enclosed outer radius





e-chains® | Series F17 | Openable along the inner radius from one side with film hinge


Part No. e-chains®	Bi [mm]	Ba [mm]	R Available bend radii [mm]	Weight [kg/m]
F17.015.R.0	15	26	048 075	≈ 0.52

Complete Part No. with required radius (R). Example: F17.015.048.0

Installation dimensions

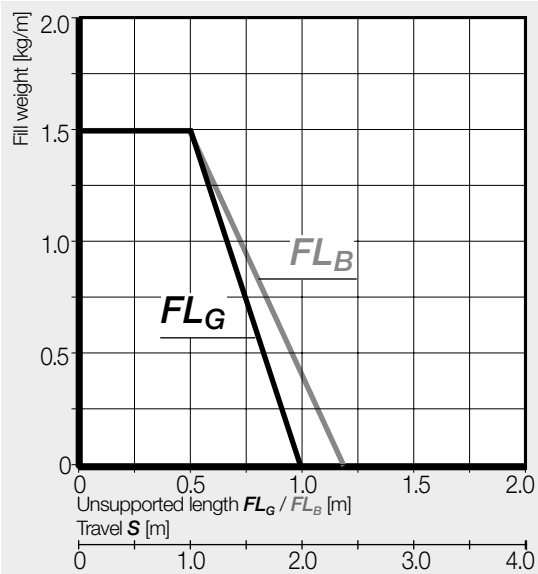

Inner height [mm]	32
Pitch [mm/link]	30.5
Links/m	33
corresponds to [mm]	1,006.5
e-chain® length	$L_K = S/2 + K$

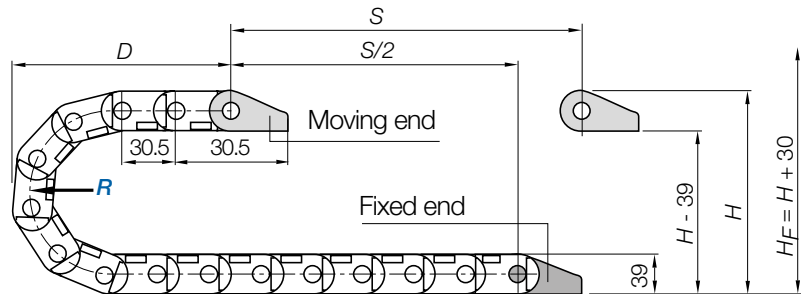

R	048	075
H	135	189
D	113	140
K	215	300


The required clearance height: $H_F = H + 30\text{mm}$ (with 0.5kg/m fill weight)

330 More information ► www.igus.eu/F17




E2 mini | Series F17 | Accessories

Mounting brackets, polymer one-piece | Locking

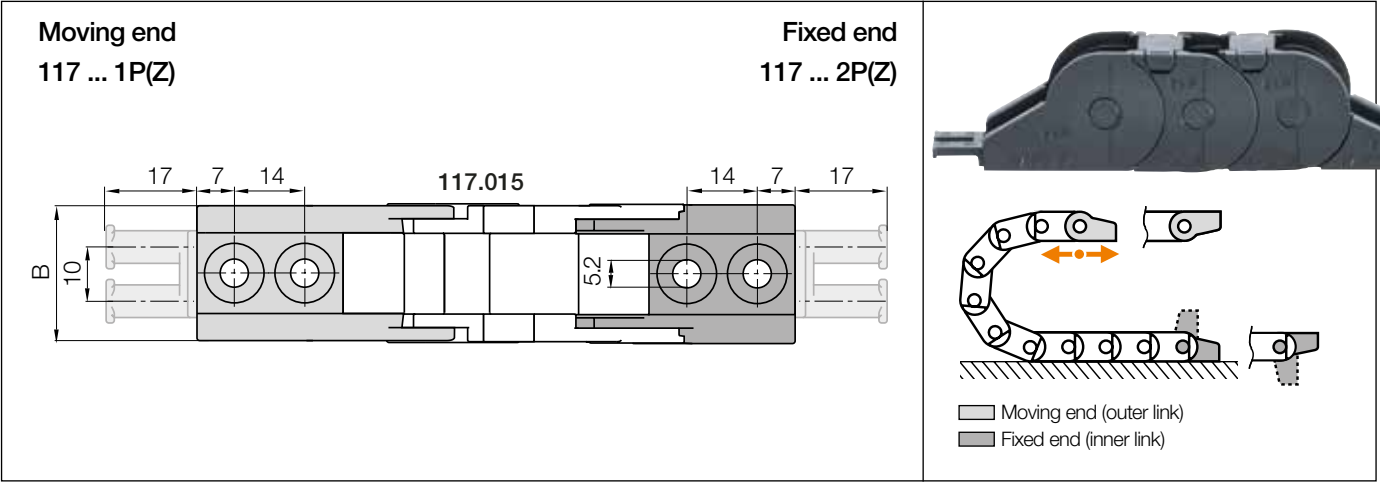

Width index	Part No. full set with tiewrap plates	Part No. full set without tiewrap plates	A [mm]	B [mm]	Number of teeth
015. ►	117.015.12PZ	117.015.12P	–	25.7	2

Material mounting bracket - igumid G, temperature: -40° up to +120°C, VDE 0304 IIC UL94-HB

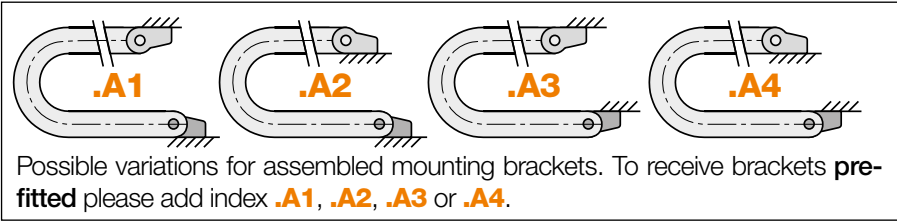

117.015.12PZ.A1 Order example

.A... to indicate option with brackets pre-fitted With integrated strain relief tiewrap plates


Full set

Series

igus 3D CAD, service life calculation, configurators and more ► www.igus.eu/E2mini

331

Interior separation

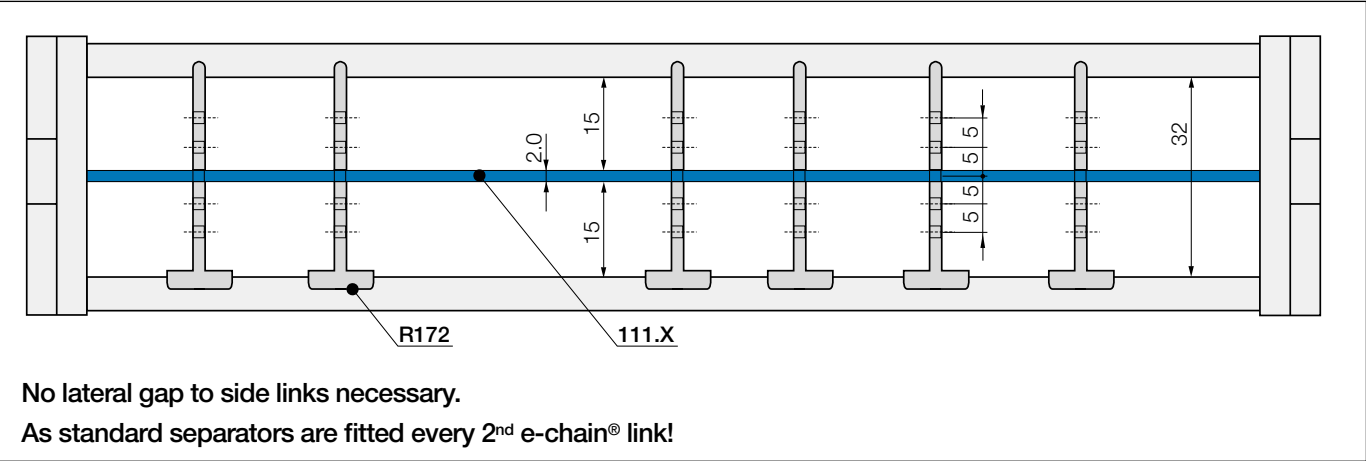

Slotted separator

unassembled	R171
assembled	R172

Slotted separator
Vertical separation in e-tubes. The slot allows basic vertical/horizontal shelving arrangements.

Full-width shelf for e-chains®

unassembled	110.X
assembled	111.X

Full-width shelf
This option is for applications with many small cables with similar diameters. For full-width separation.

Full-width shelves Width = X [mm]	X [mm]	unassembled	assembled
	015	110.15	111.15



E2 mini e-chain® with Reverse Bend Radius **RBR**

