

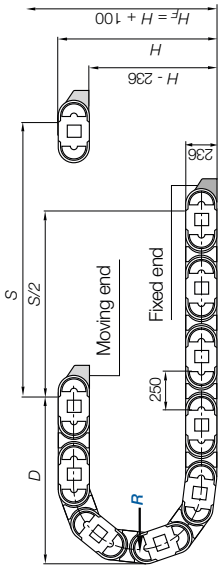


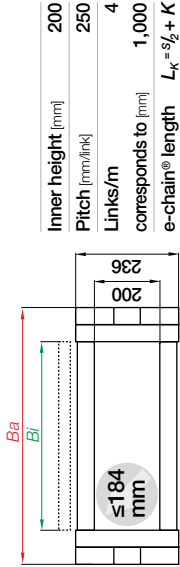

removable along the inner and outer radius)

	Bi [mm]	Ba [mm]	800 [kg/m]
	400	460	≈ 16,74
	450	510	≈ 16,88
	500	560	≈ 17,23
	550	610	≈ 17,63
	600	660	≈ 18,19


ars every link

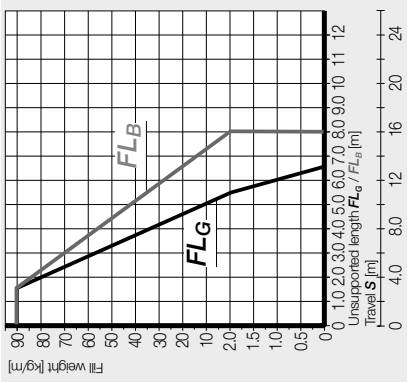

R	325	350	400	450	500	600	750	1,000
H	886	936	1,036	1,136	1,236	1,436	1,736	2,236
D	818	843	893	943	993	1,093	1,243	1,493
K	1,525	1,600	1,760	1,915	2,075	2,385	2,860	3,645

The required clearance height: $H_f = H + 100\text{mm}$ (with 5.0kg/m fill weight)


Gliding applications | For travel lengths from 15m to max. 450m

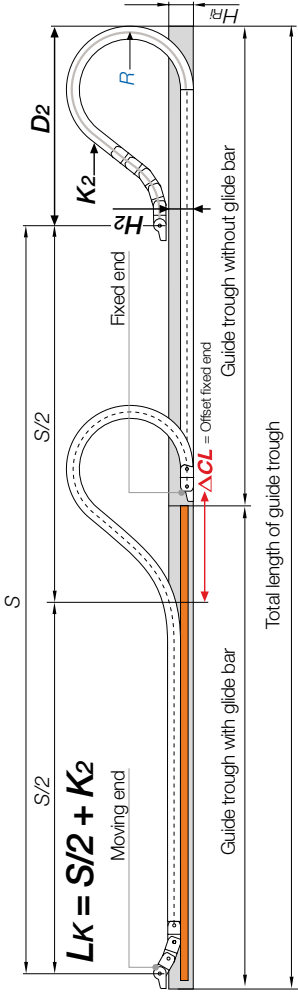

Note: We recommend the project planning of such a system to be carried out by igus®.
In case of travels between 12 and 15m we recommend an e-chain® with a longer unsupported length.

R	325	350	400	450	500	600	750	1,000
H2	580	580	580	580	580	580	580	580
D2+25	1,030	1,080	1,380	1,610	2,000	2,480	*	*
K2	2,000	2,000	2,500	3,000	3,250	4,000	*	*
CL	250	300	550	750	1,050	1,400	*	*

*Values upon request

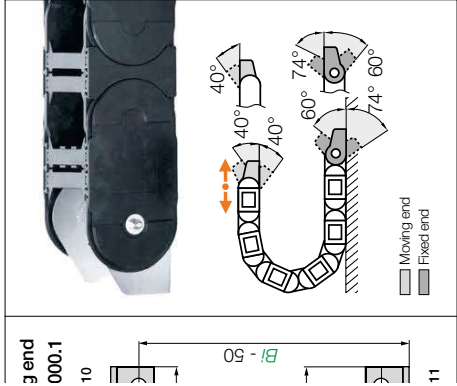


ing and vertical hanging applications


o.z. LIN-TECH HENNlich s.r.o.
Českolipská 9, 412 01 Litoměřice



Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech

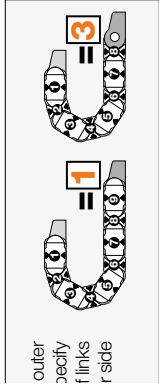

s are available from stock. The complete
2

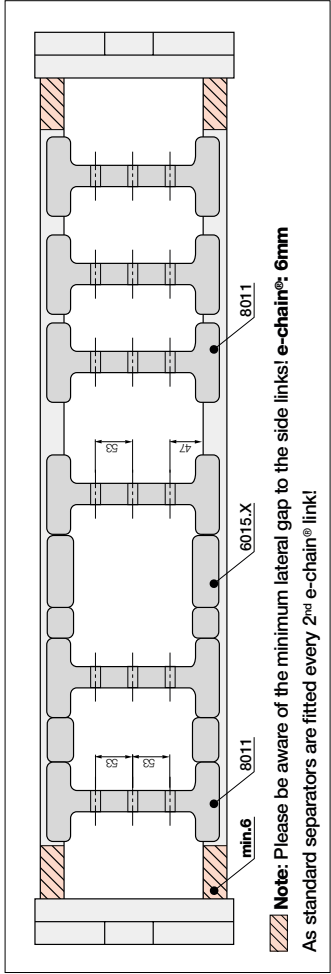


			
Slotted separator	Spacer	Slotted separator	Spacer
unassembled	unassembled	unassembled	unassembled
8001	6005.XX	8001	6005.XX
assembled	assembled	assembled	assembled
8011	6015.XX	8011	6015.XX

Slotted separator
For a vertical subdivision. The slot allows basic vertical/horizontal shelving arrangements.

Spacer
Separators can be fixed in position using spacers. The available interior height is reduced by 2mm per spacer (4mm when spacers are fitted on both sides). To avoid this, the parts can also be installed on the outside of the opening crossbar.

Modular shelving system | Series 800

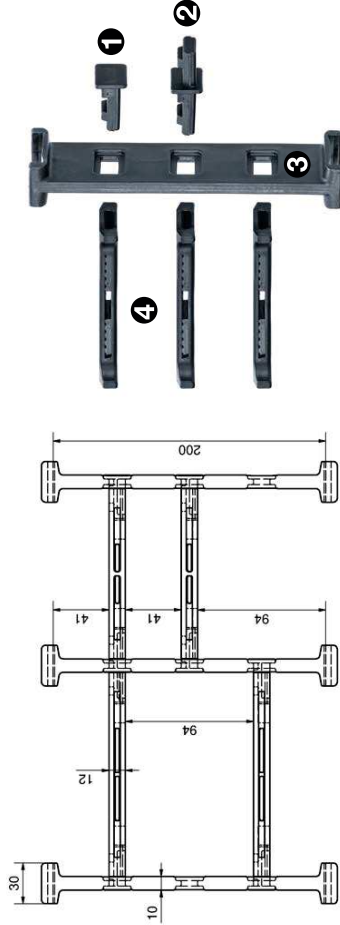

- Secure separation even for large cables
- Easy assembly
- Robust, even for large cable diameters
- Modular
- Widths from 50 to 600mm

Part No.	Part No.	Design	Part No.	Part No.	Width
unassembled	assembled	snap in tab	separator	crossbar	[mm]
8001H1	8011H1	one side	8001	450.XX.A	50-600
8001H2	8011H2	both sides	8001	450.XX.A	50-600

igus 3D CAD, configurators, service life calculation and more ► www.igus.co.uk/E4.1