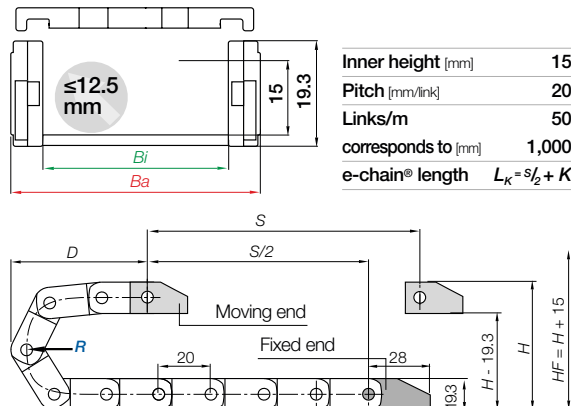
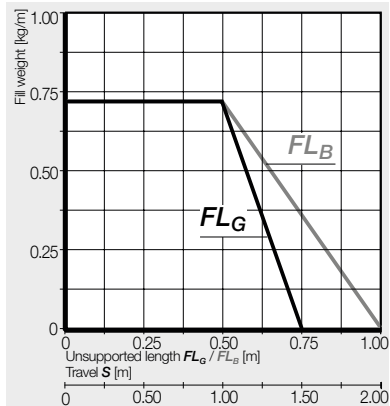




e-tube | Series R09 | Lids on a strip - zip-open along the outer radius

Part No.	Bi	Ba	R	Available bend radii	Weight
e-tubes	[mm]	[mm]	[mm]	[mm]	[kg/m]
R09.10.R.0	10	18.2	048	075 100	≈ 0.23
R09.16.R.0	16	24.2	048	075 100	≈ 0.26
R09.20.R.0	20	28.2	048	075 100	≈ 0.27
R09.30.R.0	30	38.2	048	075 100	≈ 0.30
R09.40.R.0	40	48.2	048	075 100	≈ 0.33
R09.50.R.0	50	58.2	048	075 100	≈ 0.36


Complete Part No. with required radius (R). Example: R09.40.048.0

Installation dimensions


R	048	075	100
H	115	169	219
D	88	115	140
K	195	280	355

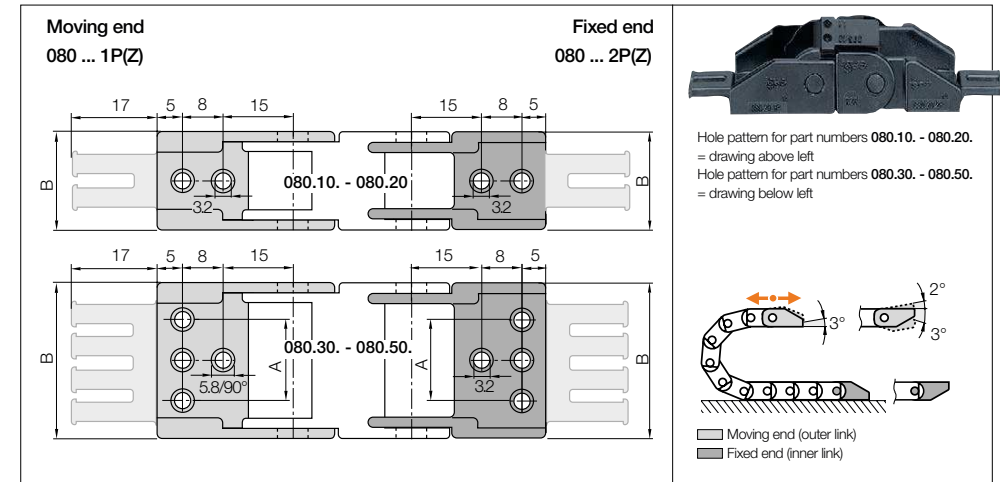 The required clearance height: $H_f = H + 15 \text{ mm}$ (with 0.3kg/m fill weight)


Width index	Part No. full set with tie-wrap plates	Part No. full set without tie-wrap plates	A [mm]	B [mm]	Number of teeth
10.	080.10.12PZ	080.10.12	-	18.2	1
16.	080.16.12PZ	080.16.12	-	24.2	2
20.	080.20.12PZ	080.20.12	-	28.2	2
30.	080.30.12PZ	080.30.12	22	38.2	3
40.	080.40.12PZ	080.40.12	32	48.2	4
50.	080.50.12PZ	080.50.12	42	58.2	5

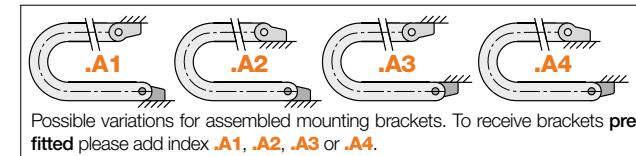

080.40.12PZ.A1 Order example
 .A... to indicate option with brackets pre-fitted
 With integrated strain relief tie-wrap plates
 Full set
 Series