





r , the outer radius


nd radii	Weight		
	[kg/m]		
00	110	125	145 180
			≈ 0.45
00	110	125	145 180
			≈ 0.51
00	110	125	145 180
			≈ 0.68
00	110	125	145 180
			≈ 0.75

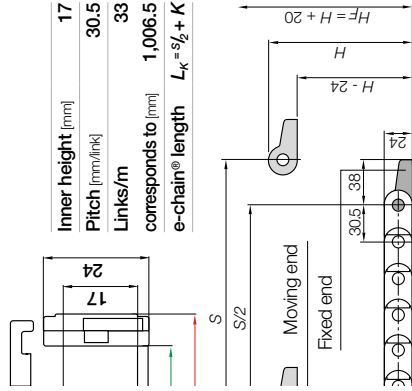


180	180
383	383
237	237
630	630

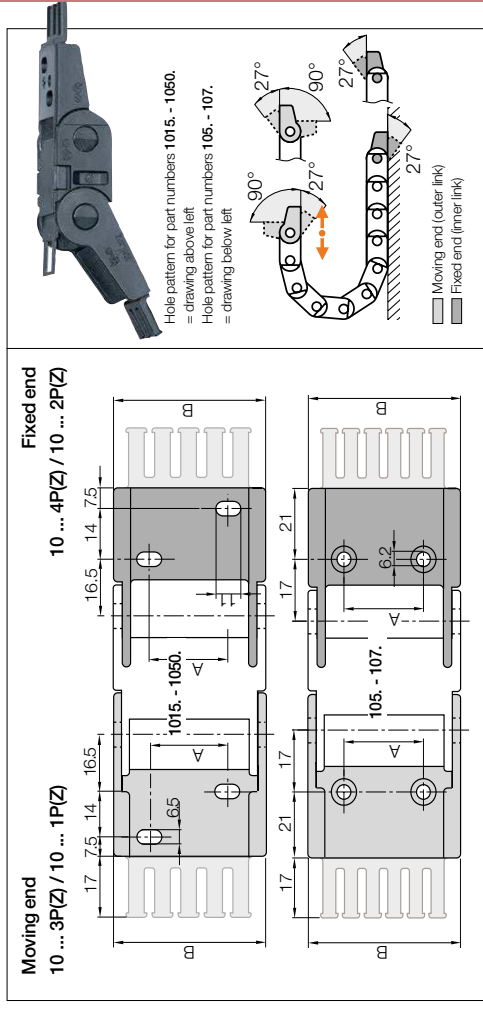

Width index		Part No. full set pivoting		Part No. full set locking		A [mm]	B [mm]	Number of teeth
		with tiwrap plates	without tiwrap plate	with tiwrap plates	without tiwrap plate			
025. ▲	038. ▲	1025.34PZ	1025.34P	1025.12PZ	1025.12P	10	35.5	3
038. ▲	063. ▲	1038.34PZ	1038.34P	1038.12PZ	1038.12P	23	48.5	4
063. ▲	080. ▲	105. 34PZ	105. 34P	105. 12PZ	105. 12P	48	75.0	6
080. ▲		106. 34PZ	106. 34P	106. 12PZ	106. 12P	65	92.0	8

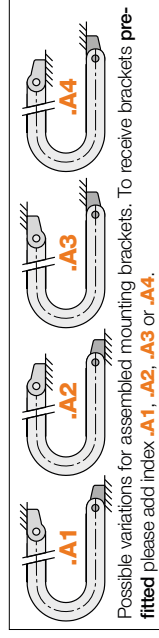

Order example
1025.34PZA1 ...to indicate option with brackets pre-fitted
 With integrated strain relief tiewrap plates
 Full set
 Series

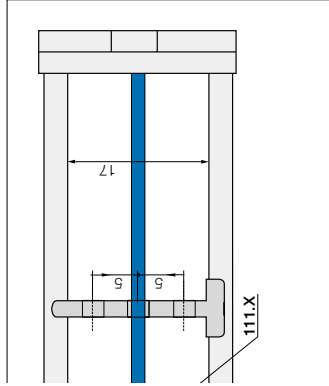


1 separator

separation in e-tubes. The slot allows basic vertical/ horizontal shelving arrangements.

width shelf

ion is for applications with many small cables with diameters. For full-width separation.

assembled
111.63
111.80

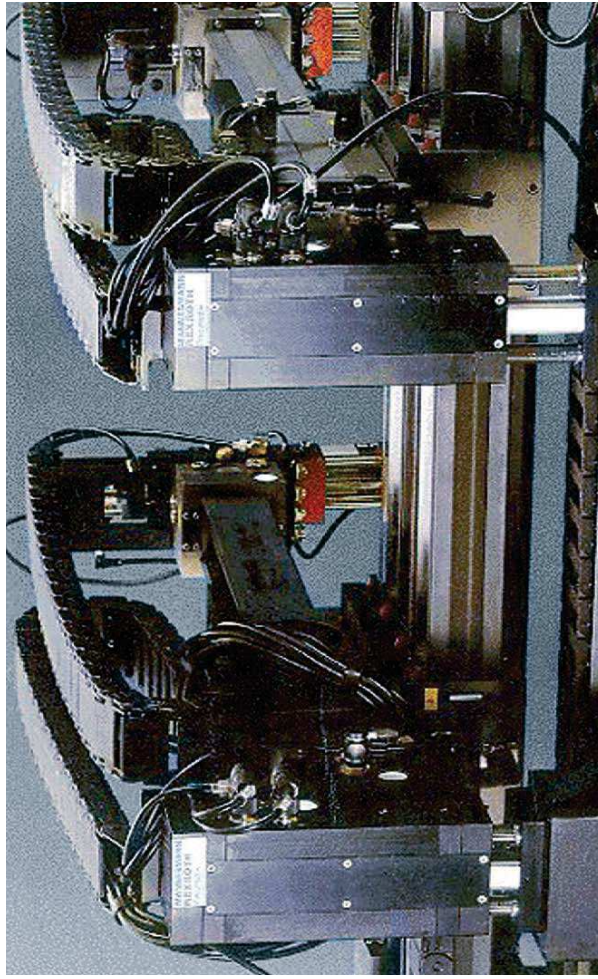

Series 15 on a pick and place machine. Acceleration: 100 m/s², smooth running



igus 3D CAD, configurators, service life calculation and more ► www.igus.co.uk/zipper