



ISO Standard Compliant Ball Screw

EBB/EPB

Compliant with Mounting Dimensions of ISO 3408-2
Precision grade of ISO 3408-3



Cat. No. 335-3EU



**HENNLICH -
ŽIJEME TECHNIKOU**

o.z. LIN-TECH HENNLICH s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech

ISO Standard Compliant Ball Screw Models **EBB / EPB**

Model EBB can be a select of screw shaft and nut assembly products or screw shaft and nut as separate components.

Structure and Features

In the ISO standard compliant Ball Screw, balls under a load roll in the raceway cut between the screw shaft and the nut while receiving the axial load, travel along the groove of a deflector embedded inside the nut to the adjacent raceway and then circulate back to the loaded area. Thus, the balls perform infinite rolling motion.

Two types of nuts are available: model EBB of oversized-ball preload type or non-preloaded type, and model EPB of offset preload type.

[Compact]

This Ball Screw is compactly built. Because of an internal circulation system using deflectors, the outer diameter of the nut is 70 to 80% of the conventional double nut and the overall nut length is only 60 to 80% of the return pipe nut.

[Compliant with a ISO standard]

Compliant with Mounting Dimensions of ISO 3408-2 and Precision grade of ISO 3408-3.

Model EBB



Nut

Deflector


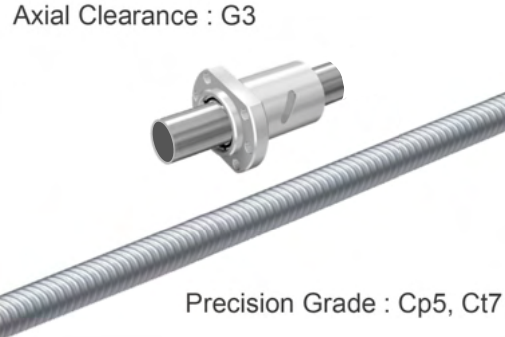
Screw shaft

Model EPB



Product lineup

| Model EBB | Model EPB |
|---|--|
| Oversized-ball preload type or non-preloaded type | Offset Preload Type |
|  |  |

Product form

| Complete Assembly | Separate Components |
|--|---|
| Axial Clearance : G0,G1,G2,G3 | Axial Clearance : G3 |
|  |  |
| Precision Grade : Cp5, Ct7 | Precision Grade : Cp5, Ct7 |

Shaft end shape for support unit

| Fixed side Shaft End | Support side Shaft End |
|---|--|
|  |  |



Available Diameter Lead Combination

| | | Lead (mm) | | |
|---------------------|----|-----------|-----|----|
| | | 5 | 10 | 20 |
| Shaft diameter (mm) | 16 | ● ■ | — | — |
| | 20 | ● ■ | — | — |
| | 25 | ● ■ | ● ■ | — |
| | 32 | ● ■ | ● ■ | — |
| | 40 | ● ■ | ● ■ | ● |
| | 50 | ● | ● ■ | ● |
| | 63 | — | ● ■ | ● |

● : EBB / ■ : EPB

Specification

Preload methods
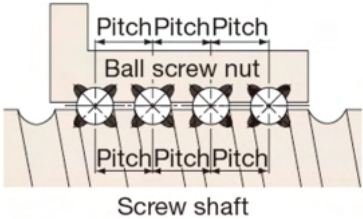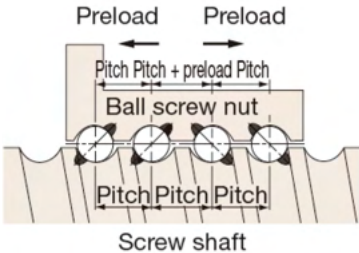
| EBB | EPB |
|--|--|
| <p><u>Oversized-ball preload</u></p> <p>The nut is filled with balls in a larger diameter to achieve 4-point contact with the raceway.</p>  | <p><u>Preload by offset-pitch</u></p> <p>The pitch is shifted at the central part of the nut to create the required preload.</p>  |

Precision Grade

The precision grades of model EBB / EPB are controlled in accordance with the ISO 3408-3

| Model No. | Precision Grades |
|-----------|------------------|
| EBB | Cp5, Ct7 |
| EPB | Cp5 |

Axial Clearance

Axial clearance of model EBB is as shown in the table below.

Axial clearance of model EPB is only G0 clearance.

Unit : mm

| Clearance Symbol | G0 | G1 | G2 | G3 |
|------------------|-----------|-----------|-----------|-----------|
| Axial Clearance | 0 or less | 0 to 0.01 | 0 to 0.02 | 0 to 0.05 |

Available Axial Clearance

Model EBB / EPB precision grades and axial clearance combinations are shown in the table below.

Complete Assembly

| Precision Grade | Cp5 | Ct7 |
|-----------------|----------|----------|
| EBB | G0 G1 | G0 G2 |
| EPB | G0 | — |

Separate Components

| Precision Grade | Cp5 | Ct7 |
|-----------------|-----|-----|
| EBB | G3 | |

Limitations of Screw Shaft Length

Unit : mm

| Precision Class | | Cp5 | Ct7 |
|---------------------|----|------|------|
| Shaft diameter (mm) | 16 | 1500 | 2000 |
| | 20 | 2000 | 2500 |
| | 25 | 2000 | 4000 |
| | 32 | 2000 | 4000 |
| | 40 | 2000 | 4000 |
| | 50 | 2000 | 4000 |
| | 63 | 2000 | 4000 |

Model number coding

Model number coding for Complete Assembly

| Model number | Lubricator QZ | Seal symbol | Clearance symbol | Shaft length | Accuracy Symbol | Shaft end symbol | |
|--------------|------------------|-------------|----------------------|-----------------|--------------------|--|----|
| EBB3205-6 | QZ | RR WW | G0 G1 G2 G3 | +650L | Cp5 R Ct7 R | - J1 - J2 - J3 - H1 - H2 - H3 | K |
| | ※1 ※5 | ※2 ※5 | | | | ※3 | |
| | | | | | | | ※4 |

Example)

EBB3205-6QZRRG0+650LCp5R-J1K

Note) The ball screw nut flange faces the fixed side unless otherwise specified.
If desiring the flange to face the supported side, add symbol G in the end of the Ball Screw model number when placing an order.

(Example) EPB2505-5RRGO+420LCp5R-J2KG

Model number coding for Separate Components

| Ball screw nut | |
|---------------------|-------------|
| Nut Model number | Seal symbol |
| EBB3205-6 | RR |
| | ※2 |

Example)

EBB3205-6RR

| Ball screw shaft | | | |
|-----------------------|-----------------|--------------------|--|
| Shaft Model number | Shaft length | Accuracy Symbol | Shaft end symbol |
| TS3205 ※6 | +650L | Cp5 R Ct7 R | - J1 - J2 - J3 - H1 - H2 - H3 |
| | | | ※3 |
| | | | ※4 |






Example)

TS3205+650LCt7R-H1



- ※1 No symbol : Without Lubricator QZ
※2 No symbol : Without Labyrinth Seal RR (Wiper ring WW)
※3 No symbol : Without Shaft end machining
※4 No symbol : Without Shaft end machining
※5 Lubricator QZ and Wiper ring WW are options that apply to Complete Assembly.
※6 Symbol "TS" is screw shaft model number.

Shape of the Shaft Ends

Type of Recommended Shape of the Shaft Ends


| Mounting method | Symbol | Shaft End Shape | Support Unit |
|--------------------|------------|--|--------------|
| Fixed | H1 |  | FK |
| | J1 | | BK |
| | H2 |  | FK |
| | J2 | | BK |
| | H3 |  | FK |
| | J3 | | BK |
| Supported | K |  | FF BF |
| Free | No Symbole |  | - |

Dimensions



| Model No. | Screw shaft outer diameter | Lead | Ball center-to- center diameter | Thread minor diameter | No. of load Circuits | Basic load rating | | Rigidity |
|------------|----------------------------------|------|---------------------------------------|-----------------------------|----------------------------|-------------------|-------|----------|
| | | | | | | Ca | Coa | K |
| | | | | | Rows × turns | kN | kN | N/μm |
| EBB 1605-4 | 16 | 5 | 16.75 | 13.1 | 4×1 | 11.9 | 17.4 | 210 |
| EBB 2005-3 | 20 | 5 | 20.5 | 17.1 | 3×1 | 10.6 | 17.3 | 200 |
| EBB 2505-3 | 25 | 5 | 25.5 | 22.1 | 3×1 | 12.1 | 22.6 | 250 |
| EBB 2510-3 | 25 | 10 | 26.0 | 21.6 | 3×1 | 15.9 | 27 | 250 |
| EBB 2510-4 | 25 | 10 | 26.0 | 21.6 | 4×1 | 20.9 | 37.6 | 330 |
| EBB 3205-3 | 32 | 5 | 32.75 | 29.2 | 3×1 | 13.9 | 30.2 | 300 |
| EBB 3205-4 | 32 | 5 | 32.75 | 29.2 | 4×1 | 17.8 | 40.3 | 400 |
| EBB 3205-6 | 32 | 5 | 32.75 | 29.2 | 6×1 | 25.1 | 60.4 | 600 |
| EBB 3210-3 | 32 | 10 | 33.75 | 26.4 | 3×1 | 32.1 | 52.2 | 300 |
| EBB 3210-4 | 32 | 10 | 33.75 | 26.4 | 4×1 | 41.3 | 69.7 | 390 |
| EBB 4005-6 | 40 | 5 | 40.75 | 37.1 | 6×1 | 26.6 | 77.5 | 716 |
| EBB 4010-3 | 40 | 10 | 41.75 | 34.4 | 3×1 | 37.3 | 69.3 | 380 |
| EBB 4010-4 | 40 | 10 | 41.75 | 34.4 | 4×1 | 47.6 | 92.4 | 500 |
| EBB 4010-6 | 40 | 10 | 41.75 | 34.4 | 6×1 | 67.5 | 138.6 | 750 |
| EBB 4020-3 | 40 | 20 | 41.75 | 34.7 | 3×1 | 36.8 | 69.3 | 750 |
| EBB 5005-6 | 50 | 5 | 50.75 | 47.1 | 6×1 | 30.9 | 99.1 | 940 |
| EBB 5010-4 | 50 | 10 | 51.75 | 44.4 | 4×1 | 54.3 | 120.5 | 610 |
| EBB 5020-3 | 50 | 20 | 52.25 | 43.6 | 3×1 | 55.3 | 108.8 | 470 |
| EBB 6310-6 | 63 | 10 | 64.75 | 57.7 | 6×1 | 87.9 | 242.1 | 1140 |
| EBB 6320-3 | 63 | 20 | 65.7 | 56.0 | 3×1 | 104.4 | 229.3 | 1470 |

Note) Basic Dynamic Load Rating (Ca) of the accuracy Ct7 is 0.9 Ca.

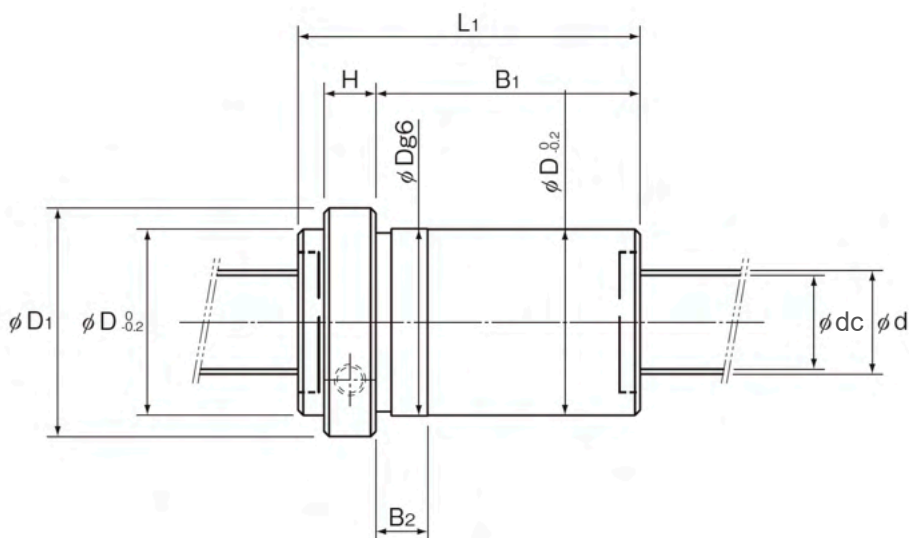

Unit : mm


| | Nut dimensions | | | | | | | | | | Nut mass kg | Shaft mass kg/m |
|--|---------------------|-----------------------------------|----------------------------------|----|----------------|----------------|-----|----------------|----------------|--------------------|----------------|--------------------|
| | Outer diameter D | Flange diameter D ₁ | Overall length L ₁ | H | B ₁ | B ₂ | PCD | d ₁ | T _w | Greasing hole A | | |
| | 28 | 48 | 55 | 10 | 40 | 12 | 38 | 5.5 | 20 | M6×1 | 0.21 | 1.25 |
| | 36 | 58 | 50 | 10 | 35 | 12 | 47 | 6.6 | 22 | M6×1 | 0.31 | 2.06 |
| | 40 | 62 | 50 | 10 | 35 | 12 | 51 | 6.6 | 24 | M6×1 | 0.34 | 3.35 |
| | 40 | 62 | 80 | 10 | 65 | 18 | 51 | 6.6 | 24 | M6×1 | 0.51 | 3.45 |
| | 40 | 62 | 85 | 10 | 70 | 18 | 51 | 6.6 | 24 | M6×1 | 0.53 | 3.45 |
| | 50 | 80 | 52 | 12 | 35 | 12 | 65 | 9 | 31 | M6×1 | 0.59 | 5.67 |
| | 50 | 80 | 57 | 12 | 40 | 12 | 65 | 9 | 31 | M6×1 | 0.63 | 5.67 |
| | 50 | 80 | 67 | 12 | 50 | 12 | 65 | 9 | 31 | M6×1 | 0.71 | 5.67 |
| | 50 | 80 | 82 | 12 | 65 | 18 | 65 | 9 | 31 | M6×1 | 0.76 | 4.98 |
| | 50 | 80 | 94 | 12 | 77 | 18 | 65 | 9 | 31 | M6×1 | 0.85 | 4.98 |
| | 63 | 93 | 70 | 14 | 51 | 12 | 78 | 9 | 35 | M8×1 | 1.13 | 9.6 |
| | 63 | 93 | 84 | 14 | 65 | 18 | 78 | 9 | 35 | M8×1 | 1.23 | 8.22 |
| | 63 | 93 | 94 | 14 | 75 | 18 | 78 | 9 | 35 | M8×1 | 1.35 | 8.22 |
| | 63 | 93 | 114 | 14 | 95 | 18 | 78 | 9 | 35 | M8×1 | 1.59 | 8.22 |
| | 63 | 93 | 129 | 14 | 105 | 27 | 78 | 9 | 35 | M8×1 | 1.91 | 9.03 |
| | 75 | 110 | 75 | 16 | 54 | 12 | 93 | 11 | 42.5 | M8×1 | 1.55 | 14.59 |
| | 75 | 110 | 96 | 16 | 75 | 25 | 93 | 11 | 42.5 | M8×1 | 1.9 | 13.38 |
| | 75 | 110 | 134 | 16 | 108 | 27 | 93 | 11 | 42.5 | M8×1 | 2.59 | 13.8 |
| | 90 | 125 | 119 | 18 | 96 | 18 | 108 | 11 | 47.5 | M8×1 | 2.87 | 21.93 |
| | 95 | 135 | 136 | 18 | 108 | 27 | 115 | 13.5 | 50 | M8×1 | 4.11 | 21.57 |

Note) The rigidity values in the table represent spring constants each obtained from the load and the Elastic Deformation finish when providing an axial load 24% of the basic dynamic load rating (Ca).
These values do not include the rigidity of the components related to mounting the nut. Therefore, it is normally appropriate to regard roughly 80% of the value in the table as the actual value.
If the axial load (Fa) is not 0.24 Ca, the rigidity value (K_N) is obtained from the following equation.


$$K_N = K \left(\frac{Fa}{0.24 \cdot Ca} \right)^{\frac{1}{3}}$$

K: Rigidity value in the dimensional table.

Dimensions

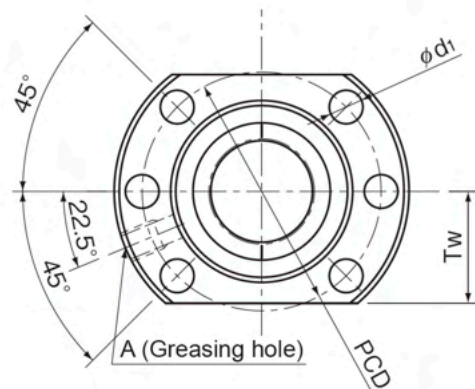


Hole type 1
(Model EPB1605 to 3210)

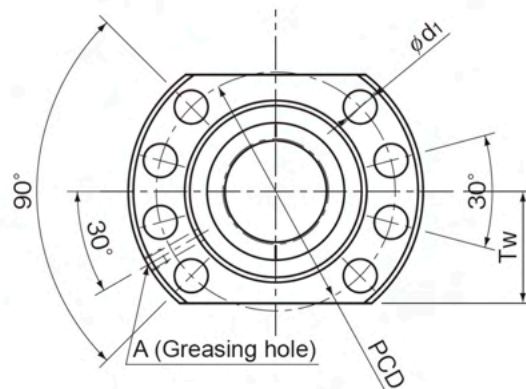

Hole type 2
(Model EPB4005 to 6310)

| Model No. | Screw shaft outer diameter | Lead | Ball center-to- center diameter | Thread minor diameter | No. of load Circuits | Basic load rating | | Rigidity |
|------------|----------------------------------|------|---------------------------------------|-----------------------------|----------------------------|-------------------|-------|----------|
| | | | | | | Ca | Coa | K |
| | | | | | Rows × turns | kN | kN | N/μm |
| EPB 1605-6 | 16 | 5 | 16.75 | 13.1 | 3 × 1 | 9.3 | 13.1 | 315 |
| EPB 2005-6 | 20 | 5 | 20.5 | 17.1 | 3 × 1 | 10.6 | 17.3 | 396 |
| EPB 2505-6 | 25 | 5 | 25.5 | 22.1 | 3 × 1 | 12.1 | 22.6 | 491 |
| EPB 2510-4 | 25 | 10 | 26.0 | 21.6 | 2 × 1 | 11.3 | 18.0 | 331 |
| EPB 3205-6 | 32 | 5 | 32.75 | 29.2 | 3 × 1 | 13.9 | 30.2 | 616 |
| EPB 3205-8 | 32 | 5 | 32.75 | 29.2 | 4 × 1 | 17.8 | 40.3 | 811 |
| EPB 3210-6 | 32 | 10 | 33.75 | 26.4 | 3 × 1 | 32.1 | 52.2 | 602 |
| EPB 4005-6 | 40 | 5 | 40.75 | 37.1 | 3 × 1 | 15.4 | 38.8 | 751 |
| EPB 4010-6 | 40 | 10 | 41.75 | 34.4 | 3 × 1 | 37.3 | 69.3 | 756 |
| EPB 4010-8 | 40 | 10 | 41.75 | 34.4 | 4 × 1 | 47.6 | 92.4 | 995 |
| EPB 5010-8 | 50 | 10 | 51.75 | 44.4 | 4 × 1 | 54.3 | 120.5 | 1234 |
| EPB 6310-8 | 63 | 10 | 64.75 | 57.7 | 4 × 1 | 61.9 | 160.7 | 1550 |

Note) Basic Dynamic Load Rating (Ca) of the accuracy Ct7 is 0.9 Ca.

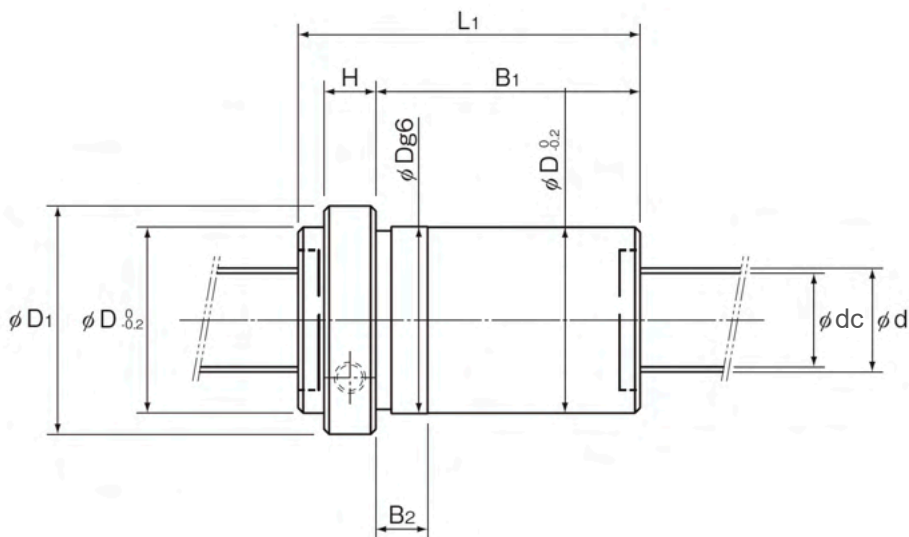

Unit : mm

| | Nut dimensions | | | | | | | | | | Nut mass kg | Shaft mass kg/m |
|--|---------------------|-----------------------------------|----------------------------------|----|----------------|----------------|-----|----------------|------|--------------------|----------------|--------------------|
| | Outer diameter D | Flange diameter D ₁ | Overall length L ₁ | H | B ₁ | B ₂ | PCD | d ₁ | Tw | Greasing hole A | | |
| | 28 | 48 | 65 | 10 | 50 | 12 | 38 | 5.5 | 20 | M6×1 | 0.25 | 1.25 |
| | 36 | 58 | 66 | 10 | 51 | 12 | 47 | 6.6 | 22 | M6×1 | 0.42 | 2.06 |
| | 40 | 62 | 66 | 10 | 51 | 12 | 51 | 6.6 | 24 | M6×1 | 0.45 | 3.35 |
| | 40 | 62 | 85 | 10 | 70 | 18 | 51 | 6.6 | 24 | M6×1 | 0.56 | 3.45 |
| | 50 | 80 | 67 | 12 | 50 | 12 | 65 | 9 | 31 | M6×1 | 0.77 | 5.67 |
| | 50 | 80 | 78 | 12 | 61 | 12 | 65 | 9 | 31 | M6×1 | 0.86 | 5.67 |
| | 50 | 80 | 112 | 12 | 95 | 18 | 65 | 9 | 31 | M6×1 | 1.03 | 4.98 |
| | 63 | 93 | 70 | 14 | 51 | 12 | 78 | 9 | 35 | M8×1 | 1.23 | 9.06 |
| | 63 | 93 | 114 | 14 | 95 | 18 | 78 | 9 | 35 | M8×1 | 1.70 | 8.22 |
| | 63 | 93 | 138 | 14 | 119 | 18 | 78 | 9 | 35 | M8×1 | 1.99 | 8.22 |
| | 75 | 110 | 140 | 16 | 119 | 18 | 93 | 11 | 42.5 | M8×1 | 2.77 | 13.38 |
| | 90 | 125 | 142 | 18 | 119 | 18 | 108 | 11 | 47.5 | M8×1 | 3.74 | 21.93 |


Note) The rigidity values in the table represent spring constants each obtained from the load and the elastic deformation when providing a preload 8% of the basic dynamic load rating (Ca) and applying an axial load three times greater than the preload. These values do not include the rigidity of the components related to mounting the nut. Therefore, it is normally appropriate to regard roughly 80% of the value in the table as the actual value.
If the applied preload (Fa0) is not 0.08 Ca, the rigidity value (KN) is obtained from the following equation.

$$K_N = K \left(\frac{Fa_0}{0.08 \cdot Ca} \right)^{\frac{1}{3}}$$

K: Rigidity value in the dimensional table.

Fixed side
Shaft Ends

Type of Recommended Shape of the Shaft Ends

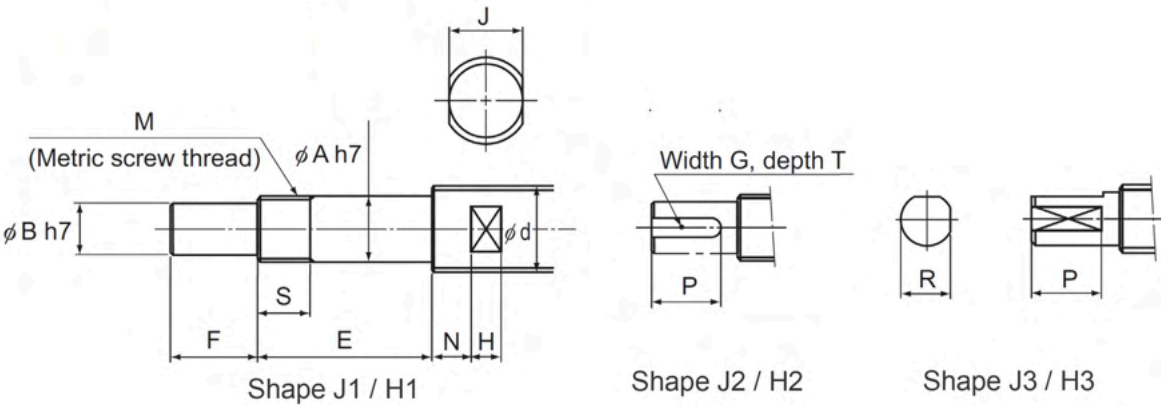

Shape J (J1, J2 and J3) (For Support Unit Model BK)

Unit : mm

| Ball Screw Model No. | d | A | B | E | F | Metric screw thread | | Width across flat | | | Shape J2 | | | Shape J3 | | Support Unit Model No. |
|-------------------------|----|----|----|----|----|------------------------|----|-------------------|----|----|----------|--------------------------------|----|----------|----|---------------------------|
| | | | | | | M | S | J | N | H | G N9 | T ^{+0.1} ₀ | P | R | P | |
| EBB/EPB1605 | 16 | 12 | 10 | 39 | 15 | M12×1 | 14 | 13 | 6 | 8 | 3 | 1.8 | 12 | 9.5 | 12 | BK12 |
| EBB/EPB2005 | 20 | 15 | 12 | 40 | 20 | M15×1 | 12 | 16 | 8 | 9 | 4 | 2.5 | 16 | 11.3 | 16 | BK15 |
| EBB/EPB25_ _ | 25 | 17 | 15 | 53 | 23 | M17×1 | 17 | 18 | 7 | 10 | 5 | 3 | 21 | 14.3 | 21 | BK17 |
| EBB/EPB32_ _ | 32 | 20 | 17 | 53 | 25 | M20×1 | 15 | 21 | 8 | 11 | 5 | 3 | 21 | 16 | 21 | BK20 |
| EBB/EPB40_ _ | 40 | 30 | 25 | 72 | 38 | M30×1.5 | 25 | 32 | 10 | 15 | 8 | 4 | 32 | 23.5 | 32 | BK30 |
| EBB/EPB50_ _ | 50 | 40 | 35 | 98 | 50 | M40×1.5 | 35 | 41 | 14 | 19 | 10 | 5 | 45 | 33 | 45 | BK40 |

Shape H (H1, H2 and H3) (For Support Unit Model FK)

Unit : mm

| Ball Screw Model No. | d | A | B | E | F | Metric screw thread | | Width across flat | | | Shape H2 | | | Shape H3 | | Support Unit position | | Support Unit Model No. |
|-------------------------|----|----|----|----|----|------------------------|----|----------------------|----|----|----------|--------------------------------|----|----------|----|--------------------------|----------------|---------------------------|
| | | | | | | M | S | J | N | H | G N9 | T ^{+0.1} ₀ | P | R | P | K ₁ | K ₂ | |
| EBB/EPB1605 | 16 | 12 | 10 | 36 | 15 | M12×1 | 11 | 13 | 6 | 8 | 3 | 1.8 | 12 | 9.5 | 12 | 0.5 | -0.5 | FK12 |
| EBB/EPB2005 | 20 | 15 | 12 | 49 | 20 | M15×1 | 13 | 16 | 6 | 9 | 4 | 2.5 | 16 | 11.3 | 16 | 4 | 2 | FK15 |
| EBB/EPB25_ _ | 25 | 15 | 12 | 49 | 20 | M15×1 | 13 | 18 | 7 | 10 | 4 | 2.5 | 16 | 11.3 | 16 | 4 | 2 | FK15 |
| EBB/EPB32_ _ | 32 | 20 | 17 | 64 | 25 | M20×1 | 17 | 27 | 9 | 13 | 5 | 3 | 21 | 16 | 21 | 1 | -3 | FK20 |
| EBB/EPB40_ _ | 40 | 30 | 25 | 72 | 38 | M30×1.5 | 25 | 32 | 10 | 15 | 8 | 4 | 32 | 23.5 | 32 | -3 | -9 | FK30 |

Note) Support Units are designed to have dimensions so that combinations of models FK and FF or models BK and BF are used on the same shaft.

If desiring the shaft end to be machined at THK, add the shape symbol in the end of the Ball Screw model number.

(Example) TS2505+500L-J2K (Shape J2 on the fixed side; shape K on the supported side)


For the perpendicularity of the end face of the bearing, refer to JIS B 1192-1997.

Note) The ball screw nut flange faces the fixed side unless otherwise specified.

If desiring the flange to face the supported side, add symbol G in the end of the Ball Screw model number when placing an order.

(Example) EBB2510-4RRG0+650LCp5R-J1KG

With the support unit model BK (FK) assembled to shape J1,J2,J3 (H1,H2,H3)

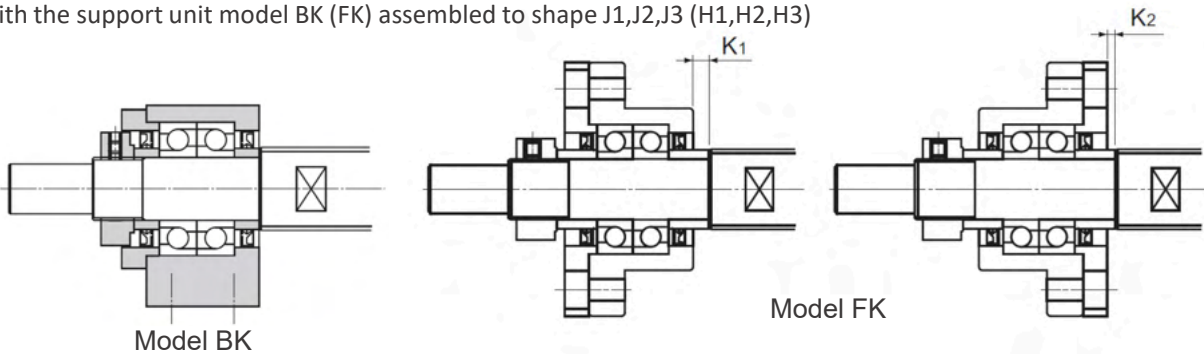


Recommend Shape of Shaft Ends

Support
side
Shaft Ends

Type of Recommended Shape of the Shaft Ends
Shape K (For Support Unit Model BF, FF)

Shape K

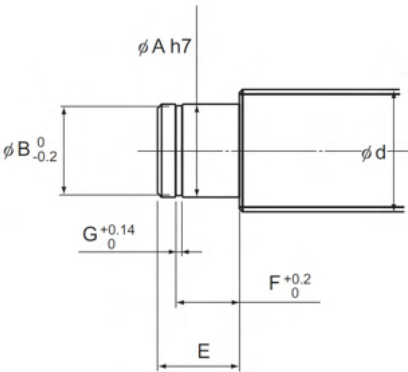


Unit: mm

| Ball Screw Model No. | d | A | E | B | F | G | Support Unit Model No. |
|----------------------|----|----|----|------|-------|------|------------------------|
| EBB/EPB1605 | 16 | 10 | 11 | 9.6 | 9.15 | 1.15 | BF12/FF12 |
| EBB/EPB2005 | 20 | 15 | 13 | 14.3 | 10.15 | 1.15 | BF15/FF15 |
| EBB/EPB25__ | 25 | 15 | 13 | 14.3 | 10.15 | 1.15 | BF15/FF15 |
| | | 17 | 16 | 16.2 | 13.15 | 1.15 | * BF17 |
| EBB/EPB32__ | 32 | 20 | 16 | 19 | 13.35 | 1.35 | ** BF20 |
| | | 20 | 19 | 19 | 15.35 | 1.35 | ** FF20 |
| EBB/EPB40__ | 40 | 30 | 21 | 28.6 | 17.75 | 1.75 | BF30/FF30 |
| EBB/EPB50__ | 50 | 40 | 23 | 38 | 19.95 | 1.95 | BF40 |

Note) Support Units are designed to have dimensions so that combinations of models FK and FF or models BK and BF are used on the same shaft.
If desiring the shaft end to be machined at THK, add the shape symbol in the end of the Ball Screw model number.
* When model BK17 (shaft end shape: J) is used on the fixed side for a Ball Screw with a shaft outer diameter of 25 mm, the shaft end shape on the supported side is that for model BF17.
** When placing an order, be sure to specify the model number of the Support Unit to be used.

(Example)
TS2505+500L-H2K (Shape H2 on the fixed side; shape K on the supported side)
For the perpendicularity of the end face of the bearing, refer to JIS B 1192-1997.

With the support unit model BF / FF assembled to shape K

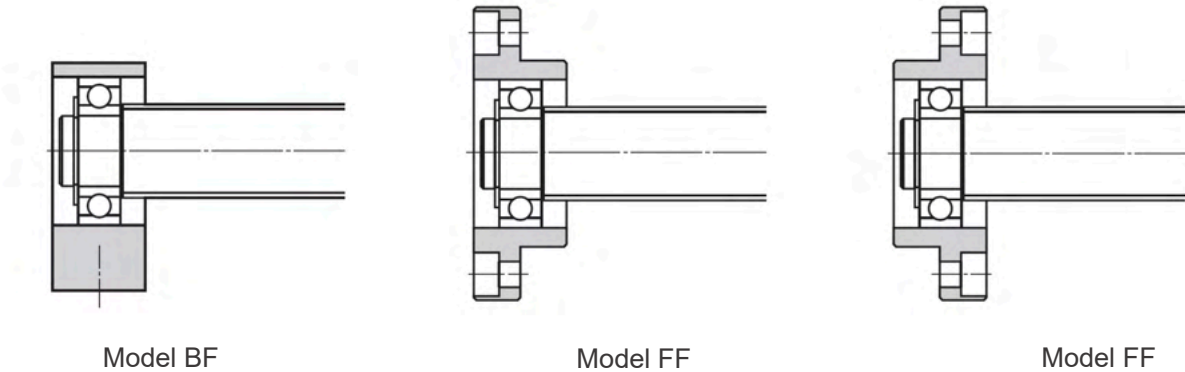


Options

The options that apply to Complete Assembly

For EBB/EPB series, QZ Lubricators and Wiper Rings for Ball Screws are available as options. QZ Lubricators which contains a highly oil impregnated fiber net are designed for long term maintenance free operation. Contact type seal. Wiper Ring W. excels in foreign material removal.


QZ Lubricator

QZ Lubricator is a lubrication system that supplies sufficient lubrication to the raceway of the ball screw shaft.


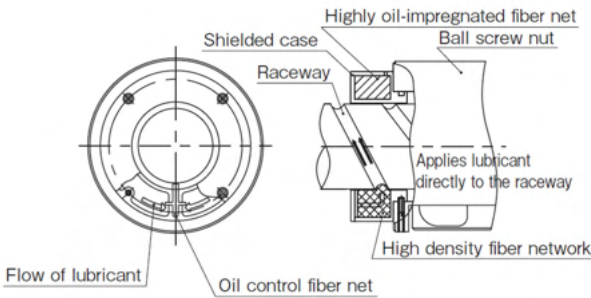


Wiper ring W

In wiper ring W, a highly wear resistant special resin elastically contacts the circumference and thread groove of the ball screw shaft, and removes foreign material from eight slits, preventing it from entering the ball screw nut.

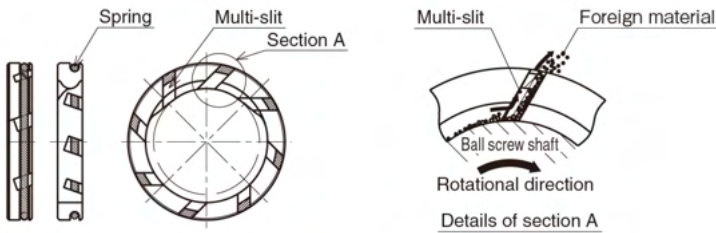

Dimensions of the Ball Screw Nut Attached with Wiper Ring W and QZ Lubricator

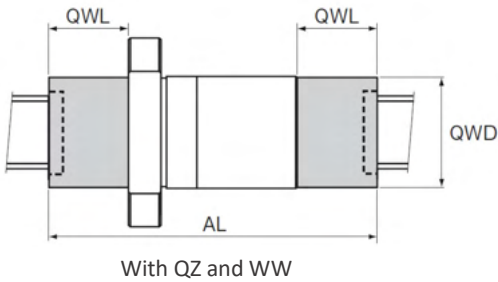

Unit : mm

| Model No. | L | QWL | QWD | AL |
|------------|-----|------|-----|-----|
| EBB 1605-4 | 55 | 25 | 27 | 110 |
| EBB 2005-3 | 50 | 26.5 | 33 | 98 |
| EBB 2505-3 | 50 | 28 | 39 | 101 |
| EBB 2510-3 | 80 | 32 | 39 | 139 |
| EBB 2510-4 | 85 | 32 | 39 | 144 |
| EBB 3205-3 | 52 | 35 | 45 | 117 |
| EBB 3205-4 | 57 | 35 | 45 | 122 |
| EBB 3205-6 | 67 | 35 | 45 | 132 |
| EBB 3210-3 | 82 | 40 | 49 | 157 |
| EBB 3210-4 | 94 | 40 | 49 | 169 |
| EBB 4005-6 | 70 | 28.5 | 61 | 122 |
| EBB 4010-3 | 84 | 44 | 61 | 167 |
| EBB 4010-4 | 94 | 44 | 61 | 177 |
| EBB 4010-6 | 114 | 44 | 61 | 197 |
| EBB 4020-3 | 129 | 47 | 61 | 213 |
| EBB 5010-4 | 96 | 44 | 71 | 165 |
| EBB 5020-3 | 134 | 40 | 71 | 204 |
| EBB 6310-6 | 119 | 39 | 84 | 192 |
| EBB 6320-3 | 136 | 30.5 | 94 | 187 |

Note) The dimension L indicates the length of the nut with WW.


Unit : mm

| Model No. | L | QWL | QWD | AL |
|------------|-----|------|-----|-----|
| EPB 1605-6 | 65 | 25 | 27 | 115 |
| EPB 2005-6 | 66 | 26.5 | 33 | 114 |
| EPB 2505-6 | 66 | 28 | 39 | 117 |
| EPB 2510-4 | 85 | 32 | 39 | 144 |
| EPB 3205-6 | 67 | 35 | 45 | 132 |
| EPB 3205-8 | 78 | 35 | 45 | 143 |
| EPB 3210-6 | 112 | 40 | 49 | 187 |
| EPB 4005-6 | 70 | 28.5 | 61 | 122 |
| EPB 4010-6 | 114 | 44 | 61 | 197 |
| EPB 4010-8 | 138 | 44 | 61 | 221 |
| EPB 5010-8 | 140 | 37 | 71 | 209 |
| EPB 6310-8 | 142 | 39 | 84 | 215 |

Note) The dimension L indicates the length of the nut with WW.

Support Unit

The support unit is a bearing component that supports the shaft end of the ball screw. To ensure the rigidity balance with the Ball Screw, the support unit uses an angular bearing (contact angle: 30°; DF configuration) with a high rigidity and low torque. Therefore, a large load can be received in the axial direction, and stable rotation accuracy with high rigidity and high accuracy can be obtained. The support unit is designed so that BK and BF, FK and FF can be used for one axis.

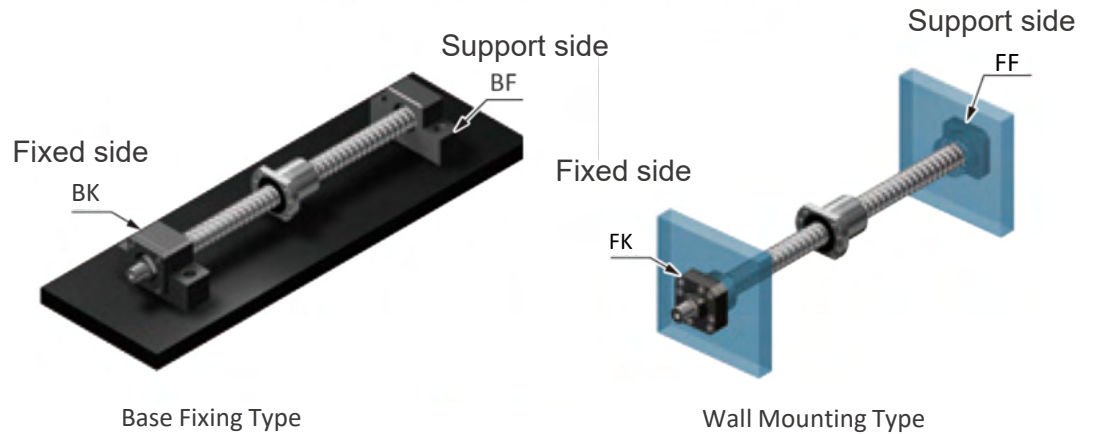

Fixed side Support Unit Line-up

| Model BK | Model FK |
|----------|----------|
| | |

Support side Support Unit Line-up


| Model BF | Model FF |
|----------|----------|
| | |

| Support Unit Model No. | Bearing | Axial direction | | |
|------------------------|-------------------------|-----------------------------------|-------------------------------------|-----------------|
| | | Basic dynamic load rating Ca (kN) | Permissible Load (kN) ¹⁾ | Rigidity (N/μm) |
| BK12/FK12 | 7001 equivalent (DF P5) | 6.66 | 3.25 | 88 |
| BK15/FK15 | 7002 equivalent (DF P5) | 7.6 | 4 | 100 |
| BK17 | 7203 equivalent (DF P5) | 13.7 | 5.85 | 125 |
| BK20 | 7004 equivalent (DF P5) | 12.7 | 7.55 | 140 |
| FK20 | 7204 equivalent (DF P5) | 17.9 | 9.5 | 170 |
| BK30/FK30 | 7206 equivalent (DF P5) | 28 | 16.3 | 195 |
| BK40 | 7208 equivalent (DF P5) | 44.1 | 27.1 | 270 |

| Support Unit Model No. | Bearing | Radial direction | |
|------------------------|---------|----------------------------------|----------------------------------|
| | | Basic dynamic load rating C (kN) | Basic static load rating Co (kN) |
| BF12/FF12 | 6000ZZ | 4.55 | 1.96 |
| BF15/FF15 | 6002ZZ | 5.6 | 2.84 |
| BF17 | 6203ZZ | 9.6 | 4.6 |
| BF20 | 6004ZZ | 9.4 | 5.05 |
| FF20 | 6204ZZ | 12.8 | 6.65 |
| BF30/FF30 | 6206ZZ | 19.5 | 11.3 |
| BF40 | 6208ZZ | 29.1 | 17.8 |

¹⁾Permissible load indicates the static permissible load.

Model BK Square Type Support Unit on the Fixed Side

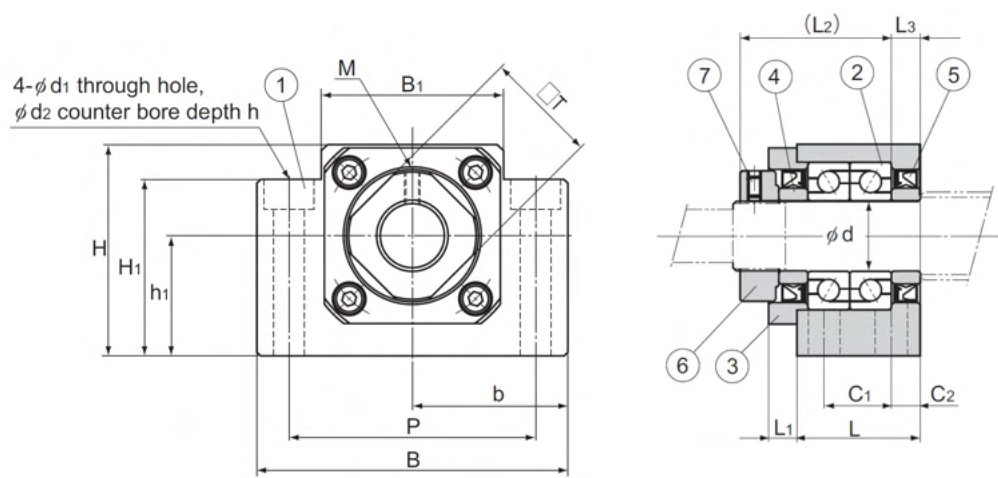


| Part No. | Part name | No. of units |
|----------|---|--------------|
| 1 | Housing | 1 |
| 2 | Bearing | 1 set |
| 3 | Holding lid | 1 |
| 4 | Collar | 2 |
| 5 | Seal | 2 |
| 6 | Lock Nut | 1 |
| 7 | Hexagonal socket-head setscrew (with a set piece) | 1 |

Unit : mm

| Support Unit Model No. | d | L | L ₁ | L ₂ | L ₃ | B | H | b ±0.02 | h ₁ ±0.02 | B ₁ | H ₁ | P | C ₁ | C ₂ | d ₁ | d ₂ | h | M | T | Mass (kg) | Ball Screw Model No. |
|------------------------|----|----|----------------|----------------|----------------|-----|-----|------------|-------------------------|----------------|----------------|-----|----------------|----------------|----------------|----------------|------|----|----|-----------|----------------------|
| BK12 | 12 | 25 | 5 | 29 | 5 | 60 | 43 | 30 | 22 | 35 | 32.5 | 46 | 13 | 6 | 6.6 | 10.8 | 1.5 | M3 | 19 | 0.41 | EBB/EPB1605 |
| BK15 | 15 | 27 | 6 | 32 | 6 | 70 | 48 | 35 | 28 | 40 | 38 | 54 | 15 | 6 | 6.6 | 11 | 6.5 | M3 | 22 | 0.57 | EBB/EPB2005 |
| BK17 | 17 | 35 | 9 | 44 | 7 | 86 | 64 | 43 | 39 | 50 | 55 | 68 | 19 | 8 | 9 | 14 | 8.5 | M4 | 24 | 1.27 | EBB/EPB25_ |
| BK20 | 20 | 35 | 8 | 43 | 8 | 88 | 60 | 44 | 34 | 52 | 50 | 70 | 19 | 8 | 9 | 14 | 8.5 | M4 | 30 | 1.19 | EBB/EPB32_ |
| BK30 | 30 | 45 | 14 | 61 | 9 | 128 | 89 | 64 | 51 | 76 | 78 | 102 | 23 | 11 | 14 | 20 | 13 | M6 | 40 | 3.32 | EBB/EPB40_ |
| BK40 | 40 | 61 | 18 | 76 | 15 | 160 | 110 | 80 | 60 | 100 | 35 | 140 | 33 | 14 | 18 | 26 | 17.5 | M8 | 50 | 6.5 | EBB/EPB50_ |


Model FK Round Type Support Unit on the Fixed Side

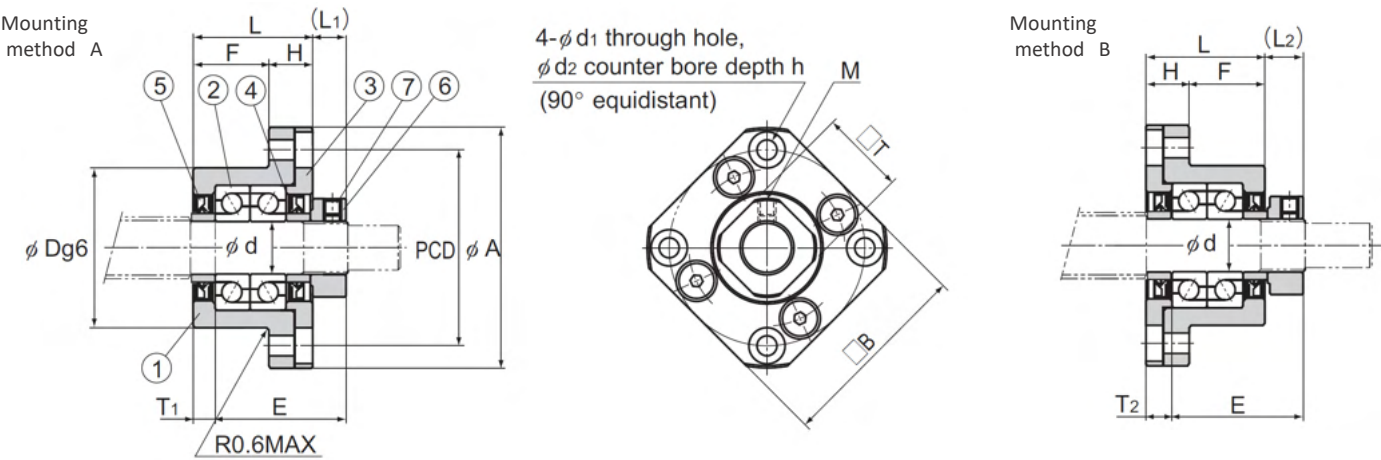

Unit : mm

| Support Unit Model No. | d | L | L ₁ | L ₂ | L ₃ | B | H | b ±0.02 | h ₁ ±0.02 | B ₁ | H ₂ | E | P | C ₁ | C ₂ | d ₃ | d ₁ | d ₂ | h | M | T | Mass (kg) | Ball Screw Model No. |
|------------------------|----|----|----------------|----------------|----------------|----|----|------------|-------------------------|----------------|----------------|----|----|----------------|----------------|----------------|----------------|----------------|-----|----|----|-----------|---------------------------|
| FK12 | 12 | 25 | 5 | 29 | 5 | 60 | 43 | 30 | 22 | 35 | 32.5 | 18 | 46 | 13 | 6 | 5.5 | 6.6 | 10.8 | 1.5 | M3 | 19 | 0.41 | EBB/EPB1605 |
| FK15 | 15 | 27 | 6 | 32 | 6 | 70 | 48 | 35 | 28 | 40 | 38 | 18 | 54 | 15 | 6 | 5.5 | 6.6 | 11 | 6.5 | M3 | 22 | 0.57 | EBB/EPB2005 EBB/EPB25_ |
| FK20 | 20 | 35 | 9 | 44 | 7 | 86 | 64 | 43 | 39 | 50 | 55 | 28 | 68 | 19 | 8 | 6.6 | 9 | 14 | 8.5 | M4 | 24 | 1.27 | EBB/EPB32_ |
| FK30 | 30 | 35 | 8 | 43 | 8 | 88 | 60 | 44 | 34 | 52 | 50 | 22 | 70 | 19 | 8 | 6.6 | 9 | 14 | 8.5 | M4 | 30 | 1.19 | EBB/EPB40_ |

Model BF Square Type Support Unit on the Support Side

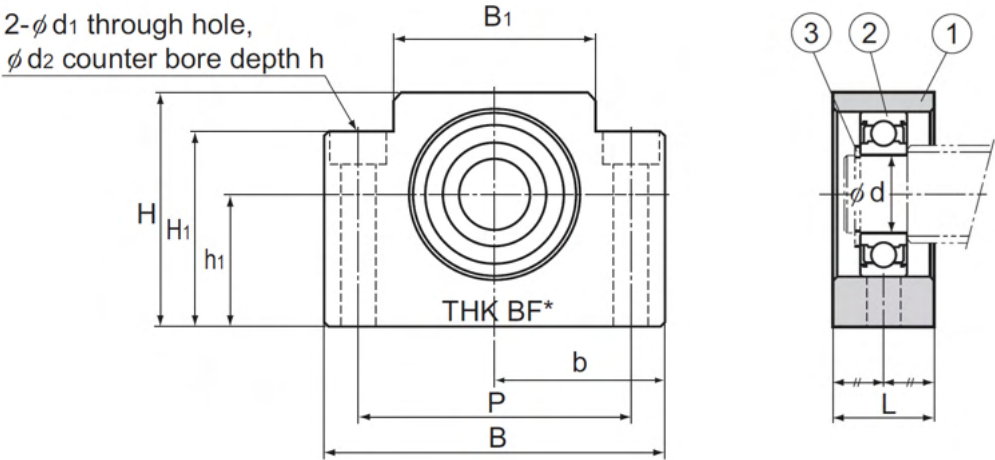


| Part No. | Part name | No. of units |
|----------|-----------|--------------|
| 1 | Housing | 1 |
| 2 | Bearing | 1 |
| 3 | Snap ring | 1 |

Unit : mm

| Support Unit Model No. | d | L | B | H | b ±0.02 | h1 ±0.02 | B1 | H1 | P | d1 | d2 | h | Bearing used | Snap ring used | Mass (kg) | Ball Screw Model No. |
|------------------------|----|----|-----|-----|------------|-------------|-----|------|-----|-----|------|------|--------------|----------------|-----------|--------------------------|
| BF12 | 12 | 25 | 60 | 43 | 30 | 22 | 35 | 32.5 | 46 | 6.6 | 10.8 | 1.5 | 6000ZZ | C10 | 0.3 | EBB/EPB1605 |
| BF15 | 15 | 27 | 70 | 48 | 35 | 28 | 40 | 38 | 54 | 6.6 | 11 | 6.5 | 6002ZZ | C15 | 0.38 | EBB/EPB2005 EBB/EPB25 |
| BF17 | 17 | 35 | 86 | 64 | 43 | 39 | 50 | 55 | 68 | 9 | 14 | 8.5 | 6203ZZ | C17 | 0.74 | EBB/EPB25__ |
| BF20 | 20 | 35 | 88 | 60 | 44 | 34 | 52 | 50 | 70 | 9 | 14 | 8.5 | 6004ZZ | C20 | 0.76 | EBB/EPB32__ |
| BF30 | 30 | 45 | 128 | 89 | 64 | 51 | 76 | 78 | 102 | 14 | 20 | 13 | 6206ZZ | C30 | 1.97 | EBB/EPB40__ |
| BF40 | 40 | 61 | 160 | 110 | 80 | 60 | 100 | 35 | 140 | 18 | 26 | 17.5 | 6208ZZ | C40 | 3.27 | EBB/EPB50__ |

Note) The area marked with “*” is imprinted with a numeric character(s) as part of the model number.

Model FF Round Type Support Unit on the Support Side

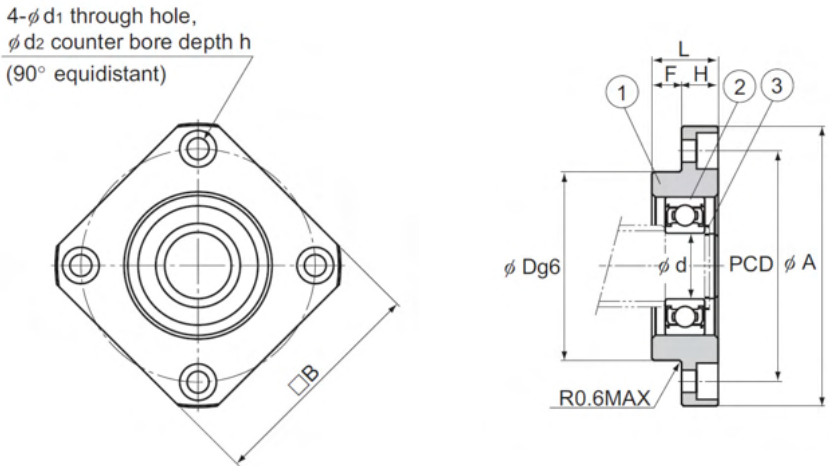


| Part No. | Part name | No. of units |
|----------|-----------|--------------|
| 1 | Housing | 1 |
| 2 | Bearing | 1 |
| 3 | Snap ring | 1 |

Unit : mm


| Support Unit Model No. | d | L | H | F | D | A | PCD | B | d1 | d2 | h | Bearing used | Snap ring used | Mass (kg) | Ball Screw Model No. |
|------------------------|----|----|----|---|---------------------------------|-----|-----|----|-----|------|-----|--------------|----------------|-----------|--------------------------|
| FF12 | 10 | 15 | 7 | 8 | 34 ^{-0.009 -0.025} | 52 | 42 | 42 | 4.5 | 8 | 4 | 6000ZZ | C10 | 0.11 | EBB/EPB1605 |
| FF15 | 15 | 17 | 9 | 8 | 40 ^{-0.009 -0.025} | 63 | 50 | 52 | 5.5 | 9.5 | 5.5 | 6002ZZ | C15 | 0.2 | EBB/EPB2005 EBB/EPB25 |
| FF20 | 20 | 20 | 11 | 9 | 57 ^{-0.01 -0.029} | 85 | 70 | 68 | 6.6 | 11 | 6.5 | 6204ZZ | C20 | 0.27 | EBB/EPB32__ |
| FF30 | 30 | 27 | 18 | 9 | 75 ^{-0.01 -0.029} | 117 | 95 | 93 | 11 | 17.5 | 11 | 6206ZZ | C30 | 1.07 | EBB/EPB40__ |

Dimensions

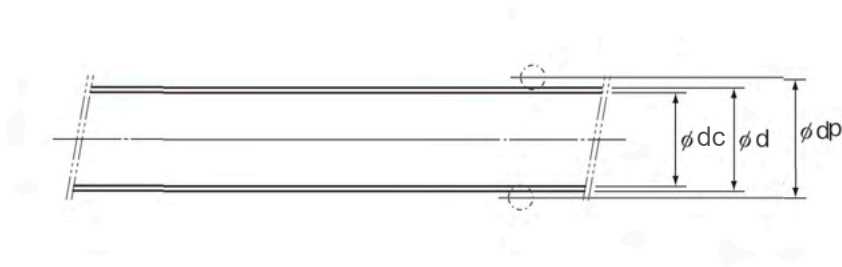


Unit: mm

| Model No. | Screw shaft outer diameter d | Lead Ph | Ball center- to-center diameter dp | Thread minor diameter dc | Limitations of Screw Shaft Length | | Shaft mass kg/m |
|-----------|---------------------------------------|----------------|---|-----------------------------------|--------------------------------------|------|---------------------------|
| | | | | | Cp5 | Ct7 | |
| TS 1605 | 16 | 5 | 16.75 | 13.1 | 1500 | 2000 | 1.25 |
| TS 2005 | 20 | 5 | 20.5 | 17.1 | 2000 | 2500 | 2.06 |
| TS 2505 | 25 | 5 | 25.5 | 22.1 | 2000 | 4000 | 3.35 |
| TS 2510 | 25 | 10 | 26.0 | 21.6 | 2000 | 4000 | 3.45 |
| TS 3205 | 32 | 5 | 32.75 | 29.2 | 2000 | 4000 | 5.67 |
| TS 3210 | 32 | 10 | 33.75 | 26.4 | 2000 | 4000 | 4.98 |
| TS 4005 | 40 | 5 | 40.75 | 37.1 | 2000 | 4000 | 9.6 |
| TS 4010 | 40 | 10 | 41.75 | 34.4 | 2000 | 4000 | 8.22 |
| TS 4020 | 40 | 20 | 41.75 | 34.7 | 2000 | 4000 | 9.03 |
| TS 5005 | 50 | 5 | 50.75 | 47.1 | 2000 | 4000 | 14.59 |
| TS 5010 | 50 | 10 | 51.75 | 44.4 | 2000 | 4000 | 13.38 |
| TS 5020 | 50 | 20 | 52.25 | 43.6 | 2000 | 4000 | 13.8 |
| TS 6310 | 63 | 10 | 64.75 | 57.7 | 2000 | 4000 | 21.93 |
| TS 6320 | 63 | 20 | 65.7 | 56.0 | 2000 | 4000 | 21.57 |

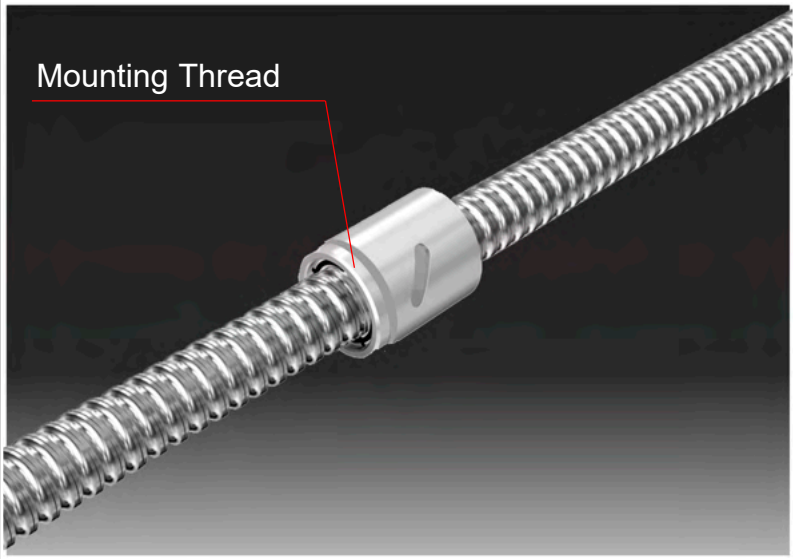


Example

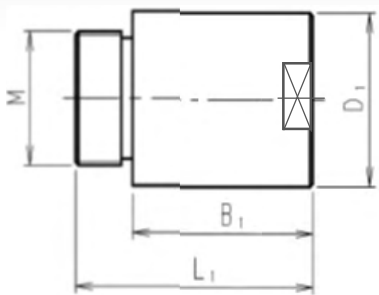

Unit:mm

| Model No. | Screw shaft outer diameter d | Lead Ph | Nut dimensions | | | | Basic load rating | |
|---------------------------|------------------------------------|------------|-------------------------------------|-----------------------------------|-------------------------------------|---------|-------------------|-----------|
| | | | Outer diameter D ₁ | Outer length B ₁ | Overall length L ₁ | M | Ca kN | Coa kN |
| EBB 2505-3S ¹⁾ | 25 | 5 | 40 | 35 | 52 | M36×1.5 | 12.1 | 22.6 |

¹⁾S means special shape symbol

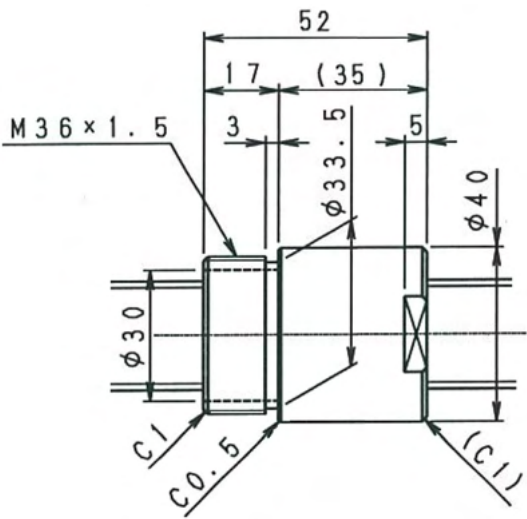

Permissible
Rotational
Speed of
Ball Screw

Permissible Rotational Speed of Ball Screw

The permissible rotational speed of the Ball Screw must be obtained from the dangerous speed of the screw shaft and the DN value.

Of the permissible rotational speed determined by dangerous speed (N_1) and the permissible rotational speed determined by DN value (N_2), the lower rotational speed is regarded as the permissible rotational speed of Ball Screw.

N_1 : Dangerous Speed of the Screw Shaft

When the rotational speed exceeds a certain limit, the Ball Screw may resonate and eventually become unable to operate due to the screw shaft's natural frequency.

Therefore, it is necessary to select a model so that it is used below the resonance point (dangerous speed). Figure on the right page shows the relationship between the screw shaft diameter and a dangerous speed. If determining a dangerous speed by calculation, it can be obtained from the equation below.

$$N_1 = \frac{60 \cdot \lambda_1^2}{2\pi \cdot \ell_b^2} \times \sqrt{\frac{E \times 10^3 \cdot I}{\gamma \cdot A}} \times 0.8 = \lambda_2 \cdot \frac{d_1}{\ell_b^2} \times 10^7$$

- N_1 : Permissible rotational speed determined by dangerous speed [min⁻¹]
 ℓ_b : Distance between two mounting surfaces [mm]
 E : Young's modulus [2.06×10⁵ N/mm²]
 I : Minimum geometrical moment of inertia of the shaft [mm⁴]

$$I = \frac{\pi}{64} \cdot d_1^4 \quad d_1 : \text{screw-shaft thread minor diameter [mm]}$$

- γ : Density [specific gravity: 7.85×10⁻⁶ kg/mm³]
 A : Screw shaft cross-sectional area [mm²]

$$A = \frac{\pi}{4} \cdot d_1^2$$

- λ_1, λ_2 : Factor according to the mounting method
- | | | |
|-----------------------|---------------------|--------------------|
| Fixed – free | $\lambda_1 = 1.875$ | $\lambda_2 = 3.4$ |
| Supported – supported | $\lambda_1 = 3.142$ | $\lambda_2 = 9.7$ |
| Fixed – supported | $\lambda_1 = 3.927$ | $\lambda_2 = 15.1$ |
| Fixed – fixed | $\lambda_1 = 4.73$ | $\lambda_2 = 21.9$ |

Note) that in this equation, a safety factor of 0.8 is multiplied to the result.

N_2 : DN Value of the Nut

The permissible rotational speed determined by the DN value obtained using the equations.

| | |
|----------------------------|-------------------------|
| $N_2 = \frac{100000}{d_p}$ | For complete assembly |
| $N_2 = \frac{70000}{d_p}$ | For separate components |

- N_2 : Permissible rotational speed determined by the DN value [min⁻¹]
 d_p : Ball center-to-center diameter [mm]
(indicated in the specification tables of the respective model number)

If the working rotational speed exceeds N_2 , a high-speed type Ball Screw is available. Contact THK for details.

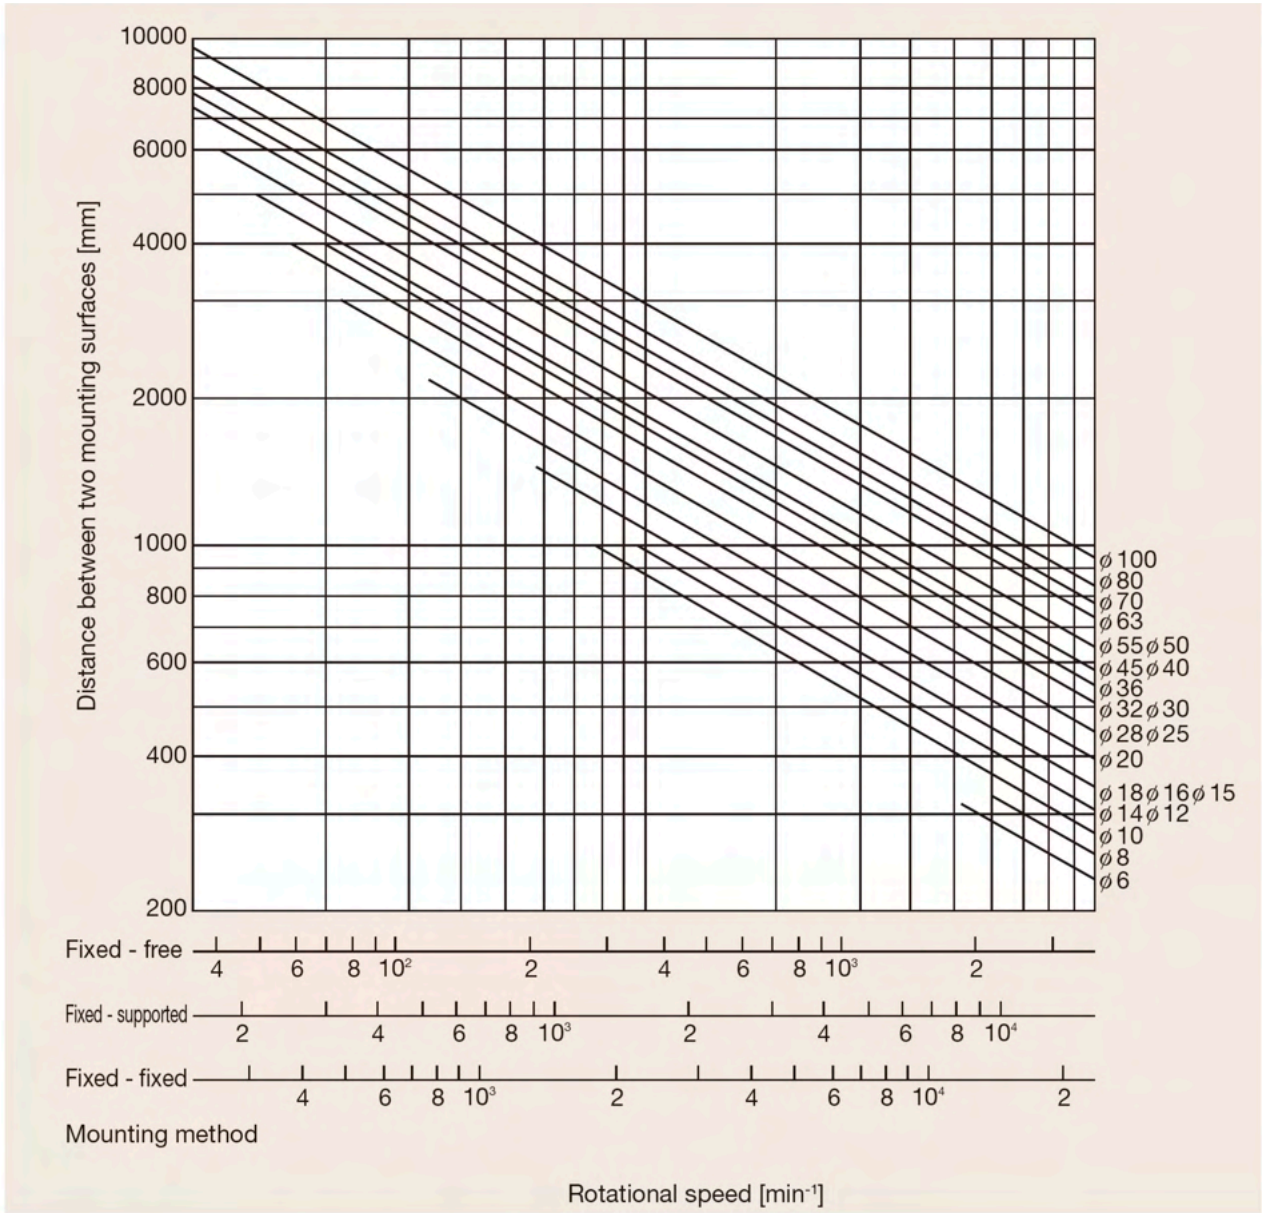


Diagram of Dangerous Speed

Permissible
Axial Load

Buckling Load on the Screw Shaft

With the Ball Screw, it is necessary to select a screw shaft so that it will not buckle when the maximum compressive load is applied in the axial direction.
Below figure shows the relationship between the screw shaft diameter and a buckling load.
If determining a buckling load by calculation, it can be obtained from the equation below.

$$P_1 = \frac{\eta_1 \cdot \pi^2 \cdot E \cdot I}{\ell_a^2} \times 0.5 = \eta_2 \cdot \frac{d_1^4}{\ell_a^2} \times 10^4$$

P_1 : Buckling load [N]
 ℓ_a : Distance between two mounting surfaces [mm]
 E : Young's modulus [2.06×10^5 N/mm²]

I : Minimum geometrical moment of inertia of the shaft [mm⁴]
 $I = \frac{\pi}{64} \cdot d_1^4$ d_1 : screw-shaft thread minor diameter [mm]

λ_1, λ_2 : Factor according to the mounting method
Fixed – free $\lambda_1=1.875$ $\lambda_2=3.4$
Supported – supported $\lambda_1=3.142$ $\lambda_2=9.7$
Fixed – supported $\lambda_1=3.927$ $\lambda_2=15.1$
Fixed – fixed $\lambda_1=4.73$ $\lambda_2=21.9$

Note) That in this equation, a safety factor of 0.5 is multiplied to the result.

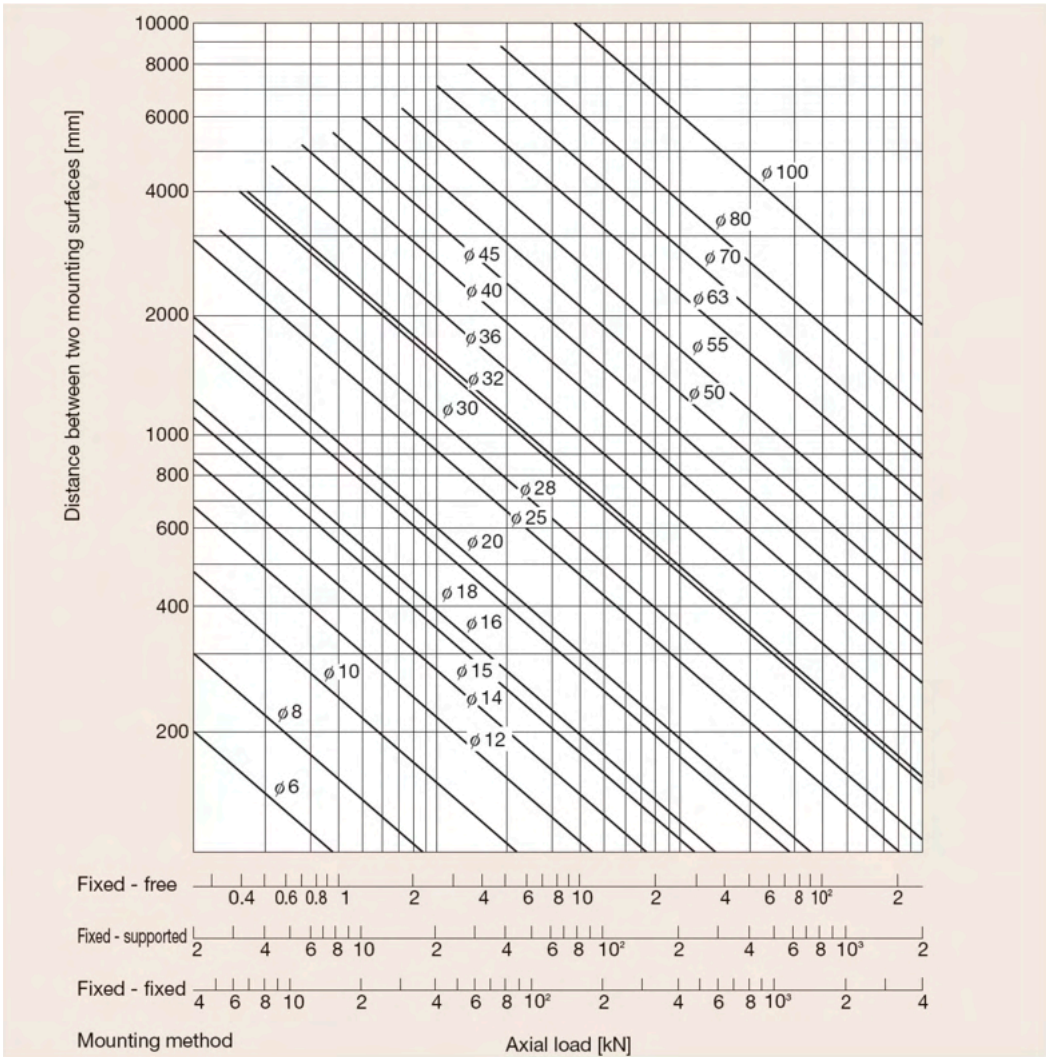


Diagram of Permissible Axial Load

Permissible Tensile Compressive Load on the Screw Shaft

If an axial load is applied to the Ball Screw, it is necessary to take into account not only the buckling load but also the permissible tensile compressive load in relation to the yielding stress on the screw shaft.
The permissible tensile compressive load is obtained from the equation.

$$P_2 = \sigma \frac{\pi}{4} d_1^2 = 116 \cdot d_1^2$$

P_2 : Permissible tensile compressive load [N]
 σ : Permissible tensile compressive stress (147 MPa)
 d_1 : Screw-shaft thread minor diameter [mm]

Static
Safety
Factor

Static Safety Factor

Depending on the conditions, it is necessary to include the following static safety factor when calculating the calculated load. When the Ball Screw is stationary or in motion, unexpected external force may be applied through a load caused by an impact or a sudden start or stop.

Basic static load rating C_{0a}

The basic static load rating (C_{0a}) is a static load with a constant direction and magnitude whereby the sum of the permanent deformation of the rolling element and that of the raceway on the contact area under the maximum stress is 0.0001 times the rolling element diameter. With the Ball Screw, it is defined as the axial load. (Specific values of each Ball Screw model are indicated in the specification tables for the corresponding model number.)

$$f_s = \frac{C_{0a}}{F_{amax}}$$

f_s : Static safety factor
 C_{0a} : Basic static load rating [kN]
 F_{amax} : Permissible Axial load [kN]

Static safety factor (f_s)

| Machine using the Ball screws | Load conditions | f_s |
|-------------------------------|-----------------------------|----------|
| General industrial machinery | Without vibration or impact | 1 to 1.3 |
| | With vibration or impact | 2 to 3 |
| Machine tool | Without vibration or impact | 1 to 1.5 |
| | With vibration or impact | 2.5 to 7 |

Nominal
Rating Life

Calculating the Nominal Rating Life

The nominal rating life of the Ball Screw is calculated from the equation below using the basic dynamic load rating (C_a) and the applied axial load.

Basic dynamic load rating C_a

The basic dynamic load rating (C_a) is used in calculating the nominal rating life when a Ball Screw operates under a load. The basic dynamic load rating (C_a) is a centric, axial load with constant direction and magnitude, where theoretically endure the nominal rating life (L_{10}) of a Group of identical Ball screws and operating under the same conditions to 10^6 revolutions. (Specific basic dynamic load ratings (C_a) are indicated in the specification tables of the corresponding model numbers.)

Life in revolutions

$$L_{10} = \left(\frac{C_a}{f_w \cdot F_a} \right)^3 \times 10^6$$

L_{10} : Life in revolutions [revolutions]
 C_a : Basic dynamic load rating [kN]
 F_a : Applied axial load [kN]
 f_w : Load factor

Load factor (f_w)

| Vibrations / impact | Speed | f_w |
|---------------------|-----------------------------|-----------|
| Faint | Without vibration or impact | 1 ~ 1.2 |
| Weak | With vibration or impact | 1.2 ~ 1.5 |
| Medium | Without vibration or impact | 1.5 ~ 2.0 |
| Strong | With vibration or impact | 2.0 ~ 3.5 |

Life in hours

If the revolutions per minute is determined, the life in hours can be calculated from the equation below using the life in revolutions(L_{10}) .

$$L_{10h} = \frac{L_{10}}{60 \times N} = \frac{L_{10} \times Ph}{2 \times 60 \times n \times lS}$$

L_{10h} : Life in hours [h]
 N : Revolutions per minute [min⁻¹]
 N : Reciprocations per minute [min⁻¹]
 Ph : Ball Screw lead [mm]
 lS : Stroke [mm]



Precautions on use

● Handling

- (1) Please use at least two people to move any product weighing 20 kg or more, or use a dolly or another conveyance. Doing so may cause injury or damage.
- (2) Do not disassemble the parts. This will result in loss of functionality.
- (3) Tilting the Ball Screw shaft and the Ball Screw nut may cause them to fall by their own weight.
- (4) Take care not to drop or strike the Ball Screw. Failure to do so could cause injury or product damage. Giving an impact to it could also cause damage to its function even if the product looks intact.
- (5) When assembling, do not remove the Ball Screw nut from the Ball Screw shaft.
- (6) When handling the product, wear protective gloves, safety shoes, etc., as necessary to ensure safety.

● Precautions on Use

- (1) Prevent foreign material, such as cutting chips or coolant, from entering the product. Failure to do so may cause damage.
- (2) If the product is used in an environment where cutting chips, coolant, corrosive solvents, water, etc., may enter the product, use bellows, covers, etc., to prevent them from entering the product.
- (3) Do not use the product at temperature of 80°C or higher. Except for the heat-resistant models, exposure to higher temperatures may cause the resin/rubber parts to deform/be damaged.
- (4) If foreign material such as cutting chips adheres to the product, replenish the lubricant after cleaning the product.
- (5) Micro-oscillation makes it difficult for oil film to form on the raceway in contact with the rolling element, and may lead to fretting. Accordingly, use grease offering excellent fretting toughness. It is also recommended that the Ball Screw nut be turned once or so on a regular basis to make sure oil film is formed between the raceway and rolling element.
- (6) Do not use undue force when fitting parts (pin, key, etc.) to the product. This may generate pressure marks on the raceway, leading to loss of functionality.
- (7) If an offset or skewing occurs with the Ball Screw shaft support and the Ball Screw nut, it may substantially shorten the service life. Pay much attention to components to be mounted and to the mounting accuracy.
- (8) If any of the rolling elements falls from the Ball Screw nut, contact THK instead of using the product.
- (9) When using this product with a vertical orientation, take preventive measures such as adding a safety mechanism to prevent falls. The own weight of the Ball Screw nut may cause it to fall.
- (10) Do not use this product beyond its permissible rotational speed. Doing so may cause accidents or component damage. Be sure to use the product within the specification range designated by THK.
- (11) Do not cause the Ball Screw nut to overshoot. The ball may drop, circulating parts may be damaged, raceway in contact with the ball may develop pressure marks, etc., resulting in malfunction. Continuing to use the product in this condition may lead to premature wear or damage to circulating parts.
- (12) Use the Ball Screw by providing a LM Guide, Ball Spline or other guide element. Otherwise, the Ball Screw may be damaged.
- (13) Insufficient rigidity or accuracy of mounting members causes the bearing load to concentrate on one point and the bearing performance will drop significantly. Accordingly, give sufficient consideration to the rigidity/accuracy of the housing and base and strength of the fixing bolts.

● Lubrication

- (1) Thoroughly wipe off anti-rust oil and feed lubricant before using the product.
- (2) Do not mix different lubricants. Mixing greases using the same type of thickening agent may still cause adverse interaction between the two greases if they use different additives, etc.
- (3) When using the product in locations exposed to constant vibrations or in special environments such as clean rooms, vacuum and low/high temperature, use the grease appropriate for the specification/environment.
- (4) When lubricating the product having no grease nipple or oil hole, apply grease directly on the raceway and stroke the product several times to let the grease spread inside.
- (5) The consistency of grease changes according to the temperature. Take note that the torque of the Ball Screw also changes as the consistency of grease changes.
- (6) After lubrication, the rotational torque of the Ball Screw may increase due to the agitation resistance of grease. Be sure to perform a break-in to let the grease spread fully, before operating the machine.
- (7) Excess grease may scatter immediately after lubrication, so wipe off scattered grease as necessary.
- (8) The properties of grease deteriorate and its lubrication performance drops over time, so grease must be checked and added properly according to the use frequency of the machine.
- (9) Although the lubrication interval may vary according to operating conditions and the service environment, lubrication should be performed approximately every 100 km in travel distance (three to six months). Set the final lubrication interval/amount based on the actual machine.
- (10) Depending on the mounting orientation and access position, lubricant may not spread fully and poor lubrication may occur. Give full consideration to these factors in the design stage.
- (11) When using a Ball Screw, it is necessary to provide effective lubrication. Using the product without lubrication may increase wear of the rolling elements or shorten the service life.

● Storage

When storing the Ball Screw, enclose it in a package designated by THK and store it in a room in a horizontal orientation while avoiding high temperature, low temperature and high humidity.
After the product has been in storage for an extended period of time, lubricant inside may have deteriorated, so add new lubricant before use.

● Disposal

Dispose of the product properly as industrial waste.

LIMITED WARRANTY

LIMITED WARRANTY AND LIMITATION OF LIABILITY

THK CO. LTD., FOR ITSELF AND ITS RELATED COMPANIES AND SUBSIDIARIES (HEREINAFTER DESCRIBED COLLECTIVELY AS "THK") WARRANTS THAT ALL THK PRODUCTS SOLD WILL BE FREE OF DEFECTS IN MATERIALS AND WORKMANSHIP FOR A PERIOD OF TWELVE (12) MONTHS FROM DATE OF DELIVERY. THE FOREGOING TWELVE (12) MONTH WARRANTY SHALL NOT BE EXTENDED OR CHANGED BY THK FURNISHING ANY REPLACEMENTS, ADDITIONS, ATTACHMENTS, ACCESSORIES OR REPAIRS TO THE PRODUCT SUBSEQUENT TO THE DATE OF DELIVERY OR ACCEPTANCE. THE FOREGOING WARRANTY IS THE SOLE AND EXCLUSIVE WARRANTY OF THK REGARDING THE PRODUCT.

DISCLAIMER OF OTHER WARRANTIES

OTHER THAN THE FOREGOING WARRANTY, THERE ARE NO EXPRESS OR IMPLIED WARRANTIES OR ANY AFFIRMATIONS OF FACT OR PROMISES BY THK WITH RESPECT TO THE PRODUCT. THK DISCLAIMS ANY WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, NOT SPECIFICALLY SET FORTH ABOVE. WITHOUT LIMITING THE GENERALITY OF THE FOREGOING, THK EXPRESSLY DISCLAIMS ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE, INFRINGEMENT OR ANY REPRESENTATIONS OF FACT OR QUALITY NOT EXPRESSLY SET FORTH HEREIN.

LIMITATION OF LIABILITY AND REMEDIES

THK'S SOLE RESPONSIBILITY AND LIABILITY INCURRED AS A RESULT OF THE SALE AND/OR USE OF THE PRODUCT, AND THE PURCHASER'S EXCLUSIVE REMEDY AGAINST THK UNDER ANY WARRANTY SHALL BE LIMITED TO THE REPAIR OR REPLACEMENT, AT THK'S OPTION, OF PRODUCT COMPONENTS NOT CONFORMING TO THE WARRANTY. THE TOTAL LIABILITY OF THK SHALL IN NO EVENT EXCEED THE AMOUNT ACTUALLY PAID TO THK BY PURCHASER WITH RESPECT TO THE PRODUCT. THIS LIMITATION OF REMEDY IS INTENDED BY THE PARTIES TO SURVIVE EVEN IF THE REMEDY IS CLAIMED TO HAVE FAILED OF ITS ESSENTIAL PURPOSE. PURCHASER'S FULL AND COMPLETE PERFORMANCE OF ALL OBLIGATIONS OF PURCHASER RECITED IN THIS AGREEMENT IS A CONDITION PRECEDENT TO THK'S WARRANTY OBLIGATIONS AND LIABILITIES HEREIN.

PURCHASER'S DAMAGES AND LIMITATIONS

IN NO EVENT SHALL THK BE LIABLE TO PURCHASER, ITS ASSIGNS OR AGENTS, FOR ECONOMIC LOSS, INCIDENTAL OR CONSEQUENTIAL DAMAGES, IN CONTRACT OR IN TORT, INCLUDING BUT NOT LIMITED TO, ANY DAMAGES FOR LOST PROFITS, DOWN-TIME, LOST PRODUCTION, FAILURE TO MEET PURCHASER'S SALES CONTRACTS, OR DEFECTS IN PURCHASER'S MATERIALS OR WORKMANSHIP ARISING DIRECTLY OR INDIRECTLY FROM THE USE OF THE PRODUCT.


DISCLAIMER

This Catalog provides basic information relating to THK linear motion and related products. The Catalog, including all information, charts, formulas, factors, accuracy standards, tolerances and application recommendations contained herein, is only a starting point for the customer's selection of appropriate products, and may not apply in all intended applications. The Catalog is not a substitute for a proper application analysis conducted by an experienced, knowledgeable design engineer. Product selection should be based upon your specific application needs and conditions, which will vary greatly depending on many factors. No specific product application should be based solely on the information contained in this Catalog. All purchases of THK Products are subject to the limited warranty offered by THK Co., Ltd, for itself and on behalf of its related companies and subsidiaries. Customers should confirm independently that a contemplated application is safe, appropriate and effective.

"All trademarks used in this Catalog are registered trademarks in the Country of Japan. If there is any question as to the validity of such trademarks outside of Japan, an inquiry should be made in that particular country."

ISO Standard Compliant Ball Screw **EBB/EPB**

For more information, please refer to **THK** General Catalogue or website.

- “LM Guide” and  are registered trademarks of THK CO., LTD.
- The actual products may differ from the pictures and photographs in this catalogue.
- Outward appearances and specifications are subject to change without notice for the purpose of improvement. Please consult THK before using.
- Although great care has been taken in the production of this catalogue, THK will not take any responsibility for damage resulting from typographical errors or omissions.
- For exports of our products and technologies and sales for exports, our basic policy is to comply with the Foreign Exchange and Foreign Trade Act and other laws and regulation. Please consult us in advance if you want to export our products by the piece.

All rights reserved

THK CO., LTD.

Headquarters 2-12-10 Shibaura, Minato-ku, Tokyo 108-8506 Japan
International Sales Department Phone: +81-3-5730-3860
www.thk.com



Please check our website
for more details

tech.thk.com

- THK GmbH
- European Headquarters..... Phone: +49-2102-7425-555
 - Düsseldorf Office Phone: +49-2102-7425-0
 - Stuttgart Office..... Phone: +49-7141-4988-500
 - U.K. Office..... Phone: +44-1384-471550
 - Italy Office Phone: +39-02-9901-1801
 - Sweden Office Phone: +46-8-445-7630
 - Austria Office Phone: +43-7229-51400
 - Spain Office Phone: +34-93-652-5740
 - Turkey Office Phone: +90-216-362-4050
 - Prague Office Phone: +420-2-41025-100
 - Moscow Office Phone: +7-495-649-80-47

- THK Europe B.V.
- Eindhoven Office Phone: +31-40-290-9500

- THK France S.A.S.
- Paris Office Phone: +33-1-7425-3800

Dealer

©THK CO.,LTD. 202007014



**HENNlich -
ŽIJEME TECHNIKOU**

o.z. LIN-TECH HENNlich s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech