





For all mounting
brackets with C-profile!

Dim. E [mm]
30
36
42
45
50



Dim. E [mm]
24
28
32
36
39



same day!
(availability)

s.eu/chainfix

**HENNlich -
ŽIJEME TECHNIKOU**

o.z. LIN-TECH HENNlich s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech

Characteristics of igus® chainfix clips


- **Option 2: Clip-on strain relief for opening crossbars**
- Available for all igus® e-chains® with opening crossbars Part no. 450.XX.
- Polymer, for cable diameters from 8 mm to 12 mm
- Quick assembly without any tools
- 2 to 3 layers on top of one another possible
- Each layer can be detached and changed later on



Option 2 | Clip-on strain relief for opening crossbars


Clamp - Part no. CFC-XX-M

ø Cable [mm]	Part no. clamp	Dim. A [mm]	Dim. B [mm]	Dim. C [mm]	Dim. D [mm]	Dim. E [mm]
08 - 12 mm	CFC-12-M	23.7	24	10	14	36

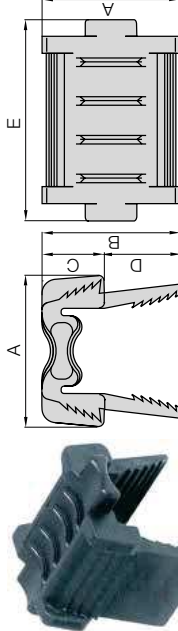

Bottom part - Part no. CFC-XX-B

ø Cable [mm]	Part no. clamp	Dim. A [mm]	Dim. B [mm]	Dim. C [mm]	Dim. D [mm]	Dim. E [mm]
08 - 12 mm	CFC-12-B	23.8	21	13	8	38

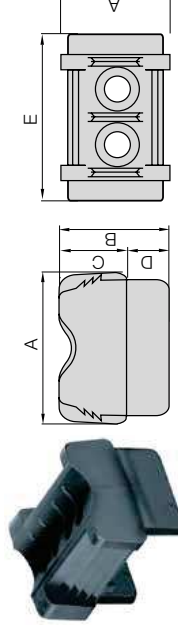

For the following
igus® series

E4.1
● E4.56/H4.56/R4.56
● E4.80/H4.80/R4.80
● 1640
● 840
E4/light
● 14040/14140
● 14550/14650
● 15050/15150
E4/00
● 400/410
● 640
E4/4
● 4040/4140
● 5050/5150
E6
● E6.80L
● E6.80




Available from stock. **Delivery time* from 24 hrs or same day!**

*Delivery time refers the time until the product is shipped (after verifying technical feasibility)

igus® | Phone +49 2203 9649-800 Fax +49 2203 9649-222 | sales@igus.eu | www.chainflex.eu 763



 For the following
igus® series



































































Dim. C	Dim. D
[mm]	[mm]
—	6
—	6
—	6
—	6
—	14
—	10
—	18
—	18
10	6.5
1	4
—	6
15	6
1	4
1	4
—	8

Chainfix strain relief separators are available for the first or second link. For an easy installation, the strain relief device is assembled on the chain.

same day!
availability


www.chainfix.eu

Strain relief separators | Product range overview

								
R157/R158 E2 e-tubes unassembled 1585.01.Z assembled 1586.01.Z	1400/1500 E2000 e-chains® unassembled 21.1.Z assembled 21.1.Z.1	2400/2500 E2000 e-chains® unassembled 2020.Z assembled 2120.Z	2450/2480 E2000 e-tubes unassembled 2020.ZR assembled 2120.ZR	2600/2700 E2000 e-chains® unassembled 262.Z assembled 263.Z	3400/3500 E2000 e-chains® unassembled 301.Z assembled 311.Z	3450/3480 E2000 e-tubes unassembled 34501.Z assembled 34511.Z	E4.28 E4.1 e-chains® unassembled 28.Z assembled 28.Z.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1
								
R167/R168 E2 e-tubes unassembled 1685.01.Z assembled 1686.01.Z	2400/2500 E2000 e-chains® unassembled 2020.Z assembled 2120.Z	2450/2480 E2000 e-tubes unassembled 2020.ZR assembled 2120.ZR	2600/2700 E2000 e-chains® unassembled 262.Z assembled 263.Z	3400/3500 E2000 e-chains® unassembled 301.Z assembled 311.Z	3450/3480 E2000 e-tubes unassembled 34501.Z assembled 34511.Z	E4.28 E4.1 e-chains® unassembled 28.Z assembled 28.Z.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1
								
R48 E2 e-tubes unassembled 481.ZR assembled 482.ZR	2400/2500 E2000 e-chains® unassembled 2020.Z assembled 2120.Z	2450/2480 E2000 e-tubes unassembled 2020.ZR assembled 2120.ZR	2600/2700 E2000 e-chains® unassembled 262.Z assembled 263.Z	3400/3500 E2000 e-chains® unassembled 301.Z assembled 311.Z	3450/3480 E2000 e-tubes unassembled 34501.Z assembled 34511.Z	E4.28 E4.1 e-chains® unassembled 28.Z assembled 28.Z.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1
								
E4.21 E4.1 e-chains® unassembled T2103.Z assembled T2113.Z	2400/2500 E2000 e-chains® unassembled 2020.Z assembled 2120.Z	2450/2480 E2000 e-tubes unassembled 2020.ZR assembled 2120.ZR	2600/2700 E2000 e-chains® unassembled 262.Z assembled 263.Z	3400/3500 E2000 e-chains® unassembled 301.Z assembled 311.Z	3450/3480 E2000 e-tubes unassembled 34501.Z assembled 34511.Z	E4.28 E4.1 e-chains® unassembled 28.Z assembled 28.Z.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1
								
T3.29 T3 e-chains® unassembled E6.29.02.Z assembled E6.29.12.Z	2400/2500 E2000 e-chains® unassembled 2020.Z assembled 2120.Z	2450/2480 E2000 e-tubes unassembled 2020.ZR assembled 2120.ZR	2600/2700 E2000 e-chains® unassembled 262.Z assembled 263.Z	3400/3500 E2000 e-chains® unassembled 301.Z assembled 311.Z	3450/3480 E2000 e-tubes unassembled 34501.Z assembled 34511.Z	E4.28 E4.1 e-chains® unassembled 28.Z assembled 28.Z.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1
								
E6.29/E61.29 E6 e-chains® unassembled E6.29.02.Z assembled E6.29.12.Z	2400/2500 E2000 e-chains® unassembled 2020.Z assembled 2120.Z	2450/2480 E2000 e-tubes unassembled 2020.ZR assembled 2120.ZR	2600/2700 E2000 e-chains® unassembled 262.Z assembled 263.Z	3400/3500 E2000 e-chains® unassembled 301.Z assembled 311.Z	3450/3480 E2000 e-tubes unassembled 34501.Z assembled 34511.Z	E4.28 E4.1 e-chains® unassembled 28.Z assembled 28.Z.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1
								
E6.35 E6 e-chains® unassembled E6.35.02.Z assembled E6.35.12.Z	2400/2500 E2000 e-chains® unassembled 2020.Z assembled 2120.Z	2450/2480 E2000 e-tubes unassembled 2020.ZR assembled 2120.ZR	2600/2700 E2000 e-chains® unassembled 262.Z assembled 263.Z	3400/3500 E2000 e-chains® unassembled 301.Z assembled 311.Z	3450/3480 E2000 e-tubes unassembled 34501.Z assembled 34511.Z	E4.28 E4.1 e-chains® unassembled 28.Z assembled 28.Z.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1
								
E6.40 E6 e-chains® unassembled E6.40.02.Z assembled E6.40.12.Z	2400/2500 E2000 e-chains® unassembled 2020.Z assembled 2120.Z	2450/2480 E2000 e-tubes unassembled 2020.ZR assembled 2120.ZR	2600/2700 E2000 e-chains® unassembled 262.Z assembled 263.Z	3400/3500 E2000 e-chains® unassembled 301.Z assembled 311.Z	3450/3480 E2000 e-tubes unassembled 34501.Z assembled 34511.Z	E4.28 E4.1 e-chains® unassembled 28.Z assembled 28.Z.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1	R4.28 E4.1 e-tubes unassembled 28.ZT assembled 28.ZT.1



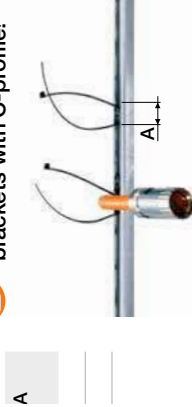For all mounting
brackets with C-profile!



**HENNLICH -
ŽIJEME TECHNIKOU**

o.z. LIN-TECH HENNLICH s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech

same day!
easibility)

s.eu/chainfix

Characteristics of the special strain relief system for hoses igus® blocks

- Modular, space-saving system
- No hose damage
- Combination of hoses and cables possible
- Hose diameters from 4.3 14 mm
- Easy to assemble without any screws and tools
- Adjustable to any e-chain® filling



Please contact us!

Block | Strain relief for hoses

Part no. block modules	Hose Ø [mm]	Number of hoses	Width [mm]
CFS 4,3	4,3	4 - 12	27,5
CFS 6	6	3 - 6	27,5
CFS 9	9	2	27,5
CFS 55,9	9	5	55,0
CFS 10	10	2	27,5
CFS 12	12	2	27,5
CFS 14	14	1	27,5

Part no. base plate	Part no. cover plate	Width [mm]
CFS U75	CFS P75	75
CFS U102,5	CFS P102,5	102,5
CFS U130	CFS P130	130
CFS U185	CFS P185	185
CFS U212	CFS P212	212,5
CFS U240	CFS P240	240
CFS U295	CFS PD295	295

Part no. spacer	Height [mm]
CFS D 16	16
CFS D 12	12
CFS D295	16



- 1 Cover plate
 - 2 Spacers
 - 3 Base plate
 - 4 Grid-dimensions modules
- B = 27.5 mm, H = 16 mm

The modules accommodate hoses from 4.3 to 14 mm, 3 x 4.3 mm hoses can be fitted on top of each in module CFS 4.3 and 2 hoses can be fitted directly on top of each other in one notch using module CFS 6. The modules have a width of 27.5 mm, are inserted into the base plate and then fastened in position with M4 countersunk screws. The exception is module CFS 55.9 which offers the capacity for 5 x 9 mm hoses with twice the width. The base plate and cover plate are available in widths ranging from 75 to 240mm. The height of the spacers and modules is 16mm. Several layers can be installed directly above one another.



Delivery time upon request, customer-specific fabrication!

igus® | Phone +49 2203 9649-800 Fax +49 2203 9649-222 | sales@igus.eu | www.chainflex.eu 767