


2000

For the following
igus® series



easychain®
● E200/Z200

E2/000
● 1400/1500/1450/1480
● 2400/2500/2450/2480
255

E2 e-tubes
● R117/R118
● R48

E4.1

● E4.28
E4/00

● 220 (2050.Z)

E6

● E6.29/R6.29

● E6.35

● E6.40

Centre bore
- = no / + = yes

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

same day!
easibility)

s.eu/chainfix



Available from stock. **Delivery time* from 24 hrs or same day!**
*Delivery time refers the time until the product is shipped (after verifying technical feasibility)

igus® | Phone +49 2203 9649-800 Fax +49 2203 9649-222 | sales@igus.eu | www.chainflex.eu 759


Characteristics of igus® chainfix tiewrap plates - Series 3000

Option 1B.: Tiewrap plates as individual parts


- Available as individual component
- Screwed on KMA* with C-profile (*polymer metal mounting bracket)
- Can be clipped onto the mounting bracket
- Single part for the manufacturing of switchgear cabinets or for the assembly of machines
- Accessory for igus® e-chain systems®




Series 3000 | Tiewrap plate as single part



Single
tiewrap plate



Drawn assembled

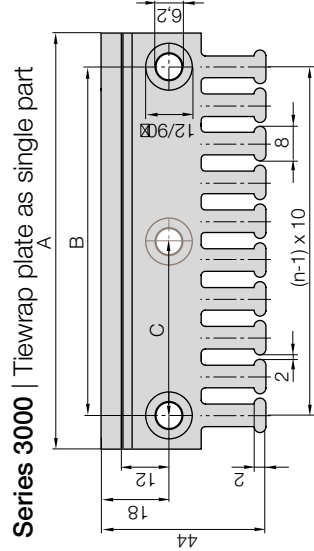

For the following
igus® series

easychain®
● E26/Z26

● E300/Z300

E2/000

● 2600/2700/2650/2680

● 3400/3500/3450/3480

E4.1

● E4.32/H4.32/R4.32

● E4.42/H4.42/R4.42

● E4.56/H4.56/R4.56

● E4.80/H4.80/R4.80

● 1640

800

840

E4/light

● 14040/14140/18840

● 14240/14340

● 14550/14650/19050

● 15050/15150/19850

● 15250/15350

E4/00

● 290/290/R770

● 380/390/R780

● 400/410/R880

● 600/601/R608

● 640

E4/4

● 2828/2928/R7728

● 3838/3938/R7828

● 4040/4140/R8840

● 5050/5150/R9850

E6

● E6.52/R6.52

● E6.62

● E6.80L / E6.80

Cable tiewraps

Cable tiewraps (100-piece bag)	Width x length [mm]	Maximum Ø	Pull force resistance [N]
CFB.001	4,8 x 150	36	222 N



profile



For all mounting
brackets with C-profile!

**HENNlich -
ŽIJEME TECHNIKOU**

o.z. LIN-TECH HENNlich s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech



s R



For the following
igus® series
► See table

ies

same day!
easibility)

s.eu/chainfix



Available from stock. Delivery time* from 24 hrs or same day!

*Delivery time refers the time until the product is shipped (after verifying technical feasibility)

igus® | Phone +49 2203 9649-800 Fax +49 2203 9649-222 | sales@igus.eu | www.chainflex.eu 761

Characteristics of igus® chainfix tiewrap plates

- Option 4: For fixed crossbars or option 5: For opening crossbars**
- Can be clipped onto fixed and opening crossbars
 - In case of many harnessed cables
 - Dual level strain relief
 - If the KMA is too small for the C-profile
 - Easy to assemble without any screws
 - Accessory for igus® e-chain systems®



Option 4 | Tiewrap plate for fixed crossbars



For the following
igus® series
► See table

Part no.	Width [mm]	Number of teeth	For series
2050.Z	60	6	E/Z200, 2400/2500, 2600/2700
3050.Z	50	5	3400/3500
3075.Z	74	7	3400/3500

Option 5 | Tiewrap plate for opening crossbars



For the following
igus® series
► See table

Part no.	Width [mm]	Number of teeth	For series
2050.Z	60	6	E4/H4/R4.28, 220, 2650
3035.ZS	35	3	3400/3500
3050.ZS	50	5	3400/3500
3075.ZS	75	7	3400/3500
3850.ZS	48	5	E4/H4/R4.32, E4/H4/R4.42, 280/290/R770, 380/390/R780,2828/2928/R7728, 3838/3938/R7838, 14240/14340, 15250/15350, E6.52, E6.62
4550.ZS	48	5	E4/H4/R4.56, E4/H4/R4.80, 400/410/R880, 4040/4140/R8840, 5050/5150/R9850, 14040/14140/18840,14550/14650/19050, 15050/15150/19850, E6.80L, E6.80, 1640/1608
4575.ZS	74	7	E4/H4/R4.56, E4/H4/R4.80, 400/410/R880, 4040/4140/R8840, 5050/5150/R9850, 14040/14140/18840, 14550/14650/19050, 15050/15150/19850, E6.80L, E6.80,1640/1608