




KITO

Armaturen GmbH

Type sheet

Pressure relief valve

KITO® DS/o cont. 25




Application



Pressure relief valve for portable tanks for the transport of non-inflammable liquids. To prevent inadmissible tank pressure by warming or filling. **Not explosion proof.**

Dimensions (mm) and settings (mbar)

Design A

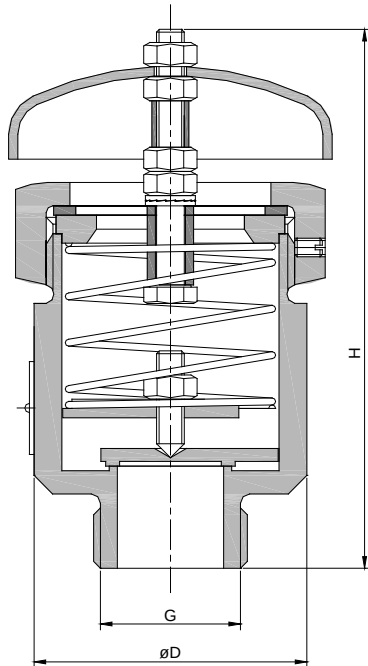

Design B

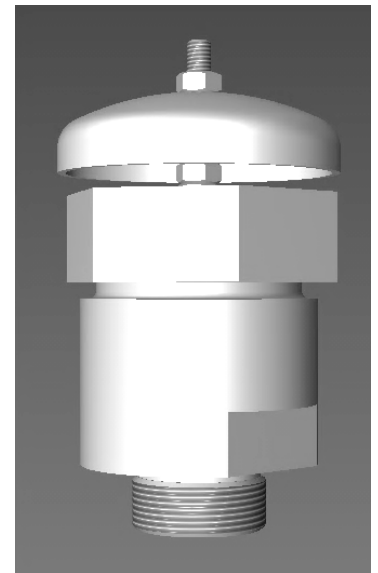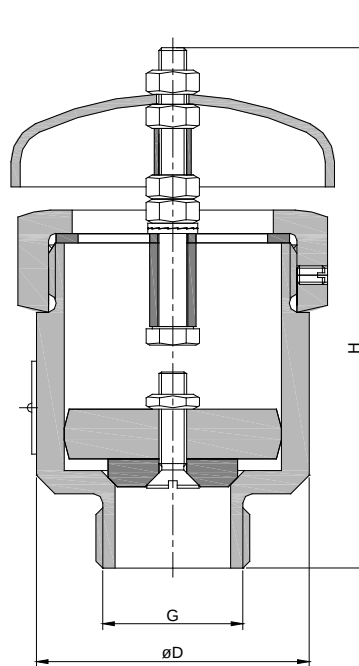

	G	D	H	setting	~ kg
Design A	1"	59	116	> 25 - 210	1.0
Design B			112	10 – 20	

Weight refers to the standard design

Example for order

KITO® DS/o cont. 25 (20 mbar)

(design with threaded connection G 1", Design B)

Without EC certificate and CE-marking

Design

	Design A	Design B
housing	stainless steel mat. no. 1.4571	
valve pallet	stainless steel mat. no. 1.4571	
valve sealing	metal sealing	PTFE
compression spring	stainless steel mat. no. 1.4571	-
protective cap	stainless steel mat. no. 1.4301	
connection	thread	

page 1 of 1

KITO Armaturen GmbH
Grotrian-Steinweg-Str. 1c
D-38112 Braunschweig
VAT Reg.No DE812887561

+49 (0) 531 23000-0
+49 (0) 531 23000-10
www.kito.de
info@kito.de

M 2 N

Date: 05-2018
Created: Abt. Doku KITO
Design subject to change