


U900A



▶ Type U900A



Rectangular universal expansion joint without arch

Design:	Rectangular rubber bellows with full faced rubber flanges and single- or multi-part backing flanges Oval construction type or rounded corners also possible	
Dimensions:	Individual length x width	
Installation length:	According to customer specification	
Pressure:	Depending on the dimensions and installation length up to 6 bar Vacuum stability on request	
Movement:	For small axial and lateral movements	

Application:

Power plants, plant construction, food processing, wastewater treatment plants, industrial plants, paper industry e.g. to disconnect apparatus, for compressors



HENNLICH & ZEBISCH GmbH · 4780 Schärding · Alfred-Kubin-Straße 9 a-c · Tel. +43 7712 3163 - 0 · Fax. +43 7712 3163 - 33 · kompensator@hennlich.at



o.z. HYDRO-TECH HENNLICH s.r.o. Českolipská 9, 412 01 Litoměřice Telefon: +420 416 711 222 E-mail: hydro-tech@hennlich.cz



Rubber bellows


Rubber grades			Carrier
E E E I I	EPDM	Cooling water, hot water, seawater, acids, dilute chlorine compounds	Nylon fabric Kevlar fabric Polyester fabric Glass fibre fabric Steel mesh
	EPDM, drinking water approved	Drinking water	
	EPDM, white, food grade	Foodstuffs	
	EPDM, abrasion-resistant	Abrasive materials, Water-sand extraction	
	EPDM, insulating	Electrical systems construction	
	IIR	Hot water, acids, bases, gases	
	CSM	Strong acids, bases, chemicals	
	NBR	Oils, petrol, solvents, compressed air	
	NBR, bright, food grade	Oil, fatty foods	
up to 80 °C:	CR	Cooling water, slightly oily water, seawater	
up to 70 °C:	NR	Abrasive materials	
up to 150 °C:	HNBR	Oils, petrol, solvents, compressed air	
up to 180 °C:	FPM	Corrosive chemicals, petroleum distillates	
up to 200°C:	Silicon (Q)	Air, saltwater atmosphere	
	Silicon (Q), white, food grade	Foodstuffs, medical technology	
PTFE lining:	Permanently embedded against chemical attacks on the interior at the rubber bellows		

Flanges

Design:	Single-part or multi-part backing flanges with clearance holes		
Flange norms:	According to customer specification		
Materials:	Carbon steel:	1.0038 (S235JRG2) 1.0570 (S355J2G3)	
	Stainless steel:	1.4301 (X5CrNi18-10) 1.4571 (X6CrNiMoTi17-12-2)	
	Aluminium: Other materials o	AlMg3 on request	
Coating:	Primed, hot-dip galvanised, special paint		

Optional accessories

Protective hood:	UV protection cover Ground protective cover Fire protection cover (> page 50)
Flow liners:	Cylindrical flow liner Conical flow liner Telescoping flow liner (> page 49)

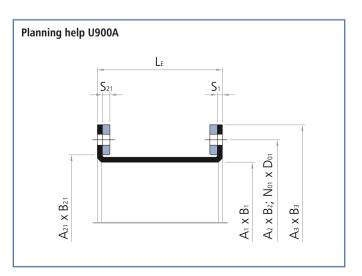

HENNLICH & ZEBISCH GmbH · 4780 Schärding · Alfred-Kubin-Straße 9 a-c · Tel. +43 7712 3163 - 0 · Fax. +43 7712 3163 - 33 · kompensator@hennlich.at

