


PNEUMATIC ATOMIZING NOZZLES



PNEUMATIC ATOMIZING NOZZLES GENERAL INFORMATION

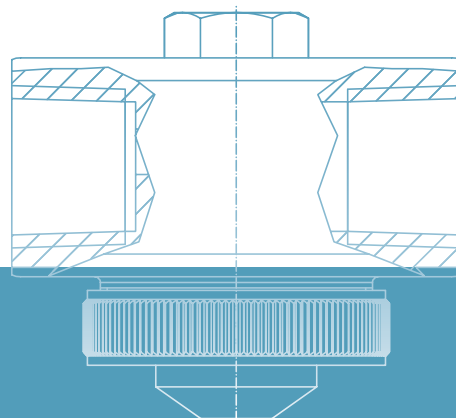


Pneumatic atomizing nozzles produce extremely fine droplets with a small droplet spectrum. They can be split into two types: Internal mixing (for low viscous fluids) and external mixing (for viscous fluids). Gas and liquid are mixed on the inside or outside of the nozzle. Depending on the actual design of the nozzle, the liquid is self-aspirated or supplied under pressure. Various spray jet shapes can be achieved through the design of the nozzle tip.

Pneumatic atomizing nozzles




- Produces extremely fine droplets
- Wide range of liquid-supply
- Internal or external mixing
- Suitable for humidification, cooling and the atomization of viscous fluids


Liquid pressure principle

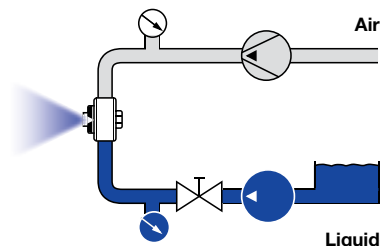

Siphon principle

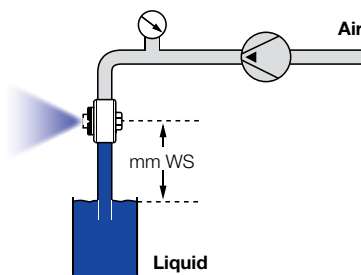

Supply principle

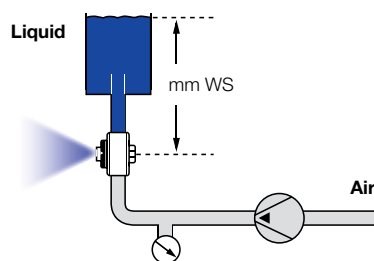

>>
 PNEUMATIC ATOMIZING NOZZLES
 OVERVIEW OF SERIES



		Pneumatic atomizing nozzles				
						
Series		140	176 ViscoMist	170	150	77X, 78X, 79X
Information on page		53	54	on request	on request	on request
Spray character 	Full cone spray	•	•	•	•	•
	Flat fan		•			
	Solid stream		•			
Type of liquid supply 	Pressure principle		•	•	•	•
	Siphon and/or supply principle	•				
Mixing of media 	Internal mixing	•		•		
	External mixing		•		•	•
Flow rate 	l/h	4.50–12.00	7.80–307.00	8.50–290.00 [l/min]	0.15–63.00 [l/min]	3.00–1,164.00
Spray angle 	Small (15°–30°)	•	•	•	•	•
	Medium (45°)					
	Large (60°–80°)					





					
Series		136.1	136.2	136.3	136.4
Information on page		30	32	33	36
 Spray character	Full cone spray	•	•	•	
	Flat fan				•
	Solid stream				
 Type of liquid supply	Pressure principle	•	•		•
	Siphon and/or supply principle			•	
 Mixing of media	Internal mixing	•	•		•
	External mixing			•	
 Flow rate	l/h	0.40–93.20	0.40–132.90	0.30–66.72	0.10–76.10
 Spray angle	Small (15°–30°)	•		•	
	Medium (45°)				•
	Large (60°–80°)		•		•



Pneumatic atomizing nozzles					
					
136.5	136.6	166.1	166.2	166.4	166.6
38	40	44	46	47	49
		•	•		
•	•			•	•
	•	•	•	•	•
•					
•		•	•	•	
	•				•
0.80–3.20	1.68–102.10	0.40–93.20	0.40–132.90	0.10–76.10	1.68–102.10
		•			
	•			•	•
•	•		•	•	•


>>
 Pneumatic atomizing nozzles, full cone, pressure principle, internal mixing

 Series 136.1





- Features:**
- Fine full cone atomization
 - Liquid pressure principle
 - Internal mixing

- Applications:**
- Humidification of air
 - Cooling



Series 136.1



Liquid connection G ₁	Air connection G ₂	Screw plug thread (size 11)	Weight [g] (Stainless steel 303)
1/4 BSPP	1/4 BSPP	5/16-24 UNF-2A	220

Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.																		
		1Y	16		0.7				1.5			3.0			4.0					
		Stainless steel 316L	Stainless steel 303		p air [bar]	$\dot{V}$ water [l/h]	$\dot{V}_n$ air [m³/h]	p air [bar]	$\dot{V}$ water [l/h]	$\dot{V}_n$ air [m³/h]	p air [bar]	$\dot{V}$ water [l/h]	$\dot{V}_n$ air [m³/h]	p air [bar]	$\dot{V}$ water [l/h]	$\dot{V}_n$ air [m³/h]	p air [bar]	p water [bar]	Ø D ₁ [mm]	Ø D ₂ [mm]
20°	136.115.xx.A2	●	●	0.5	0.4	5.9	0.3	1.4	5.8	0.8	2.4	9.1	1.1	3.0	11.0	1.2	0.8	0.7	60	100
					0.8	3.8	0.6	1.8	4.1	1.0	2.8	7.5	1.2	3.4	9.6	1.4	1.8	1.5	60	95
					1.2	1.7	0.9	2.2	2.2	1.4	3.2	5.9	1.5	3.8	8.2	1.6	2.6	2.0	60	100
					-	-	-	2.6	1.2	1.7	3.6	4.4	1.8	4.2	6.8	1.9	3.2	3.0	55	95
					-	-	-	-	-	-	4.0	2.9	2.1	4.6	5.5	2.2	4.4	4.0	55	100
					-	-	-	-	-	-	4.4	2.0	2.5	5.0	4.1	2.5	-	-	-	-
					-	-	-	-	-	-	4.8	1.1	2.8	5.4	2.9	2.8	-	-	-	-
					-	-	-	-	-	-	5.2	0.4	3.0	5.8	2.1	3.1	-	-	-	-
	136.125.xx.A2	●	●	0.5	0.8	4.7	1.5	1.2	7.0	1.8	2.8	9.1	3.3	3.4	10.6	3.9	1.4	0.7	55	90
					1.2	4.4	1.9	1.6	6.6	2.2	3.2	8.7	3.7	3.8	10.3	4.3	2.2	1.5	55	95
					1.6	4.0	2.3	2.0	6.2	2.6	3.6	8.4	4.1	4.2	9.9	4.6	2.8	2.0	55	100
					2.0	3.5	2.6	2.4	5.8	3.0	4.0	8.0	4.5	4.6	9.6	5.0	3.4	3.0	60	100
					2.4	3.0	3.0	2.8	5.4	3.4	4.4	7.7	4.8	5.0	9.3	5.4	4.2	4.0	60	100
					2.8	2.7	3.2	3.2	4.9	3.7	4.8	7.3	5.2	5.4	8.9	5.8	-	-	-	-
					3.2	2.0	3.7	3.6	4.4	4.1	5.2	7.0	5.6	5.8	8.6	6.1	-	-	-	-
					3.6	1.6	4.1	4.0	3.9	4.5	5.6	6.6	5.9	-	-	-	-	-	-	-
					4.0	1.3	4.5	4.4	3.5	4.8	6.0	6.2	6.3	-	-	-	-	-	-	-
					4.4	1.0	4.9	4.8	3.1	5.2	-	-	-	-	-	-	-	-	-	-
					4.8	0.6	5.2	5.2	2.7	5.6	-	-	-	-	-	-	-	-	-	-
					-	-	-	5.6	2.3	5.9	-	-	-	-	-	-	-	-	-	-
					-	-	-	6.0	1.9	6.3	-	-	-	-	-	-	-	-	-	-



Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.																		
		1Y	16		0.7			1.5			3.0			4.0						
		Stainless steel 316L	Stainless steel 303		p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	p water [bar]	Ø D ₁ [mm]	Ø D ₂ [mm]
20°	136.134.xx.A2	●	●	0.7	1.2	13.2	2.7	2.0	19.4	3.9	3.0	28.3	5.2	3.8	32.6	6.2	1.8	0.7	55	95
					1.6	12.4	3.3	2.4	18.1	4.4	3.4	27.5	5.7	4.2	32.0	6.8	2.8	1.5	60	105
					2.0	11.8	3.9	2.8	17.3	4.9	3.8	26.7	6.3	4.6	31.3	7.3	3.8	2.0	60	105
					2.4	11.4	4.4	3.2	16.7	5.5	4.2	25.9	6.8	5.0	30.6	7.8	5.2	3.0	65	110
					2.8	11.1	4.9	3.6	16.1	6.0	4.6	25.0	7.3	5.4	29.9	8.4	6.0	4.0	65	110
					3.2	10.8	5.5	4.0	15.6	6.5	5.0	24.2	7.8	5.8	29.3	8.9	-	-	-	-
					3.6	10.6	6.0	4.4	15.2	7.0	5.4	23.6	8.4	-	-	-	-	-	-	-
					4.0	10.4	6.5	4.8	15.0	7.6	5.8	23.1	8.9	-	-	-	-	-	-	-
					4.4	10.1	7.0	5.2	14.6	8.1	-	-	-	-	-	-	-	-	-	-
					4.8	9.9	7.6	5.6	14.1	8.6	-	-	-	-	-	-	-	-	-	-
					5.2	9.5	8.1	6.0	13.8	9.1	-	-	-	-	-	-	-	-	-	-
					5.6	9.0	8.6	-	-	-	-	-	-	-	-	-	-	-	-	-
					6.0	8.5	9.2	-	-	-	-	-	-	-	-	-	-	-	-	-
	136.142.xx.A2	●	●	2.5	1.4	24.2	5.1	1.6	53.4	4.7	3.2	70.8	8.0	3.8	93.2	9.2	0.8	0.7	60	100
					1.8	20.4	6.3	2.0	42.6	5.9	3.6	62.5	9.2	4.2	83.1	10.1	1.6	1.5	65	105
					2.2	20.0	7.2	2.4	35.3	7.2	4.0	55.7	10.6	4.6	75.3	11.3	3.0	2.0	60	105
					2.6	19.3	8.2	2.8	30.4	8.4	4.4	49.3	11.7	5.0	69.0	12.5	4.0	3.0	65	110
					3.0	17.6	9.3	3.2	28.6	9.5	4.8	44.6	12.9	5.4	63.4	13.7	6.0	4.0	65	110
					3.4	16.5	10.4	3.6	28.2	10.5	5.2	41.9	14.1	5.8	57.5	14.9	-	-	-	-
					3.8	17.0	11.4	4.0	27.3	11.5	5.6	40.4	15.1	-	-	-	-	-	-	-
					4.2	16.3	12.4	4.4	25.9	12.5	6.0	39.7	16.1	-	-	-	-	-	-	-
					4.6	15.1	13.3	4.8	24.3	13.5	-	-	-	-	-	-	-	-	-	-
					5.0	14.0	14.3	5.2	22.3	14.6	-	-	-	-	-	-	-	-	-	-
					5.4	13.1	15.3	5.6	21.8	15.7	-	-	-	-	-	-	-	-	-	-
					5.8	12.4	16.2	6.0	21.4	16.7	-	-	-	-	-	-	-	-	-	-

Ordering Type + Material no. = Ordering no.
example: 136.134.xx.A2 + 1Y = 136.134.1Y.A2




» Pneumatic atomizing nozzles, full cone, pressure principle, internal mixing
Series 136.2





- Features:**
- Fine full cone atomization
 - Liquid pressure principle
 - Internal mixing
 - Especially wide spray angle of 60°

- Applications:**
- Humidification of air
 - Cooling



Series 136.2



Liquid connection G ₁	Air connection G ₂	Screw plug thread (size 11)	Weight [g] (Stainless steel 303)
1/4 BSPP	1/4 BSPP	5/16-24 UNF-2A	220

Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Liquid pressure p [bar]										Spray dimensions						
	Type	Mat. no.			0.7				1.5			3.0			4.0			p air [bar]	p water [bar]	Ø D ₁ [mm]	Ø D ₂ [mm]
		1Y	16		p air [bar]	V̇ water [l/h]	V̇ _n air [m³/h]	p air [bar]	V̇ water [l/h]	V̇ _n air [m³/h]	p air [bar]	V̇ water [l/h]	V̇ _n air [m³/h]								
		Stainless steel 316L	Stainless steel 303																		
60°	136.215.xx.A2	●	●	0.5	1.0	3.0	1.3	1.6	5.8	1.7	2.8	8.5	2.4	3.8	9.4	3.1	1.0	0.7	200	330	
					1.2	1.8	1.5	1.8	4.9	1.9	3.2	7.2	2.8	4.2	8.2	3.5	1.6	1.5	230	380	
					1.4	0.7	1.8	2.0	3.8	2.1	3.6	5.7	3.2	4.6	6.9	3.9	2.4	2.0	230	385	
					-	-	-	2.2	2.8	2.3	4.0	4.0	3.6	5.0	5.4	4.2	3.2	3.0	245	390	
					-	-	-	2.4	1.7	2.5	4.4	2.2	4.1	5.4	3.8	4.7	4.2	4.0	250	410	
					-	-	-	2.6	0.8	2.8	4.8	0.8	4.5	5.8	2.3	5.2	-	-	-	-	
	-	-	-	-	-	-	5.0	0.4	4.6	6.0	1.4	5.6	-	-	-	-					
	136.222.xx.A2	●	●	1.0	0.8	17.5	2.8	1.6	25.9	4.0	3.0	40.4	5.8	3.8	54.9	6.4	0.8	0.7	250	450	
					1.0	6.0	4.3	1.8	14.7	5.3	3.2	31.5	6.9	4.0	45.6	7.3	1.6	1.5	245	465	
					-	-	-	2.0	6.7	6.7	3.4	22.2	8.2	4.2	37.6	8.5	2.3	2.0	245	465	
					-	-	-	2.2	1.9	8.1	3.6	14.6	9.5	4.4	29.6	9.7	3.2	3.0	250	465	
					-	-	-	-	-	-	3.8	8.5	11.0	4.6	21.6	11.2	4.2	4.0	245	465	
					-	-	-	-	-	-	4.0	4.5	12.3	4.8	15.3	12.4	-	-	-	-	
					-	-	-	-	-	-	-	-	-	5.0	9.7	13.8	-	-	-	-	
					-	-	-	-	-	-	-	-	-	5.2	6.0	15.2	-	-	-	-	
	-	-	-	-	-	-	-	-	-	5.4	2.9	16.5	-	-	-	-					
	136.231.xx.A2	●	●	1.4	1.6	25.6	5.1	2.6	44.2	7.0	3.6	93.7	7.9	4.2	132.9	7.3	2.0	0.7	235	380	
					2.0	17.8	6.2	3.0	33.0	8.2	4.0	78.3	9.3	4.6	117.2	9.0	2.6	1.5	245	415	
					2.4	11.3	7.2	3.4	24.7	9.2	4.4	65.8	10.6	5.0	101.1	10.4	2.4	2.0	255	420	
					2.8	6.9	8.1	3.8	18.1	10.2	4.8	54.9	11.9	5.4	87.9	11.8	3.6	3.0	255	425	
					-	-	-	4.2	13.2	11.2	5.2	45.6	13.0	5.8	76.6	13.2	4.2	4.0	265	430	
					-	-	-	4.6	9.3	12.0	5.6	38.0	14.1	6.0	71.2	13.8	-	-	-	-	
					-	-	-	-	-	-	6.0	36.1	14.4	-	-	-	-	-	-	-	


Ordering Type + Material no. = Ordering no.
example: 136.215.xx.A2 + 1Y = 136.215.1Y.A2





Pneumatic atomizing nozzles, full cone, siphon principle, external mixing

Series 136.3




Features:



- Particularly fine full cone atomization
- Siphon principle
- External mixing

Applications:

- Cooling
- Atomization of viscous liquids
- Chemical industry



Series 136.3



Liquid connection G ₁	Air connection G ₂	Screw plug thread (size 11)	Weight [g] (Stainless steel 303)
1/4 BSPP	1/4 BSPP	5/16-24 UNF-2A	220

Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Air		V̇ water [l/h]									Spray dimensions			
	Type	Mat. no.					Water column [mm WS]			Aspiration height [mm WS]									
		1Y	16				p [bar]	V̇ _n [m³/h]	150	300	450	100	200	300	600	900	p air [bar]	Aspiration height [mm WS]	Ø D ₁ [mm]
		Stainless steel 316L	Stainless steel 303																
20°	136.316.xx.A2	●	●	0.40	0.60	0.70	–	1.38	1.32	–	–	–	–	–	1.40	300	60	110	
0.80					0.90	1.29	1.44	1.38	–	–	–	–	–	3.20	300	60	120		
1.20					1.10	1.47	1.62	1.53	1.02	0.84	–	–	–	4.80	300	80	135		
1.40					1.20	1.50	1.68	1.62	1.14	0.96	0.66	–	–	6.00	300	70	120		
1.80					1.40	1.62	1.80	1.71	1.26	1.11	0.90	–	–	–	–	–	–		
2.00					1.60	1.68	1.86	1.77	1.32	1.17	0.96	–	–	–	–	–	–		
2.40					1.80	1.74	1.92	1.86	1.44	1.32	1.14	0.51	–	–	–	–	–		
2.60					1.90	1.80	1.98	1.89	1.50	1.32	1.20	0.63	–	–	–	–	–		
3.00					2.10	1.92	2.07	1.95	1.59	1.44	1.29	0.84	0.39	–	–	–	–		
3.20					2.20	1.95	2.10	1.98	1.65	1.50	1.35	0.96	0.48	–	–	–	–		
3.60					2.40	2.07	2.19	2.10	1.80	1.65	1.50	1.14	0.72	–	–	–	–		
3.80					2.60	2.13	2.25	2.16	1.83	1.71	1.59	1.23	0.81	–	–	–	–		
4.20					2.80	2.22	2.37	2.28	1.95	1.80	1.68	1.38	1.08	–	–	–	–		
4.40					2.90	2.25	2.40	2.34	1.98	1.89	1.77	1.44	1.14	–	–	–	–		
4.80					3.10	2.25	2.34	2.28	1.92	1.86	1.77	1.50	1.14	–	–	–	–		
5.00					3.20	2.25	2.31	2.22	1.89	1.83	1.71	1.41	0.84	–	–	–	–		
5.40					3.40	2.13	2.25	2.16	1.80	1.68	1.56	1.05	0.30	–	–	–	–		
5.60					3.60	2.07	2.19	2.10	1.74	1.65	1.44	0.72	–	–	–	–	–		
6.00					3.80	1.98	2.10	1.95	1.56	1.50	1.26	–	–	–	–	–	–		





Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Air		V̇ water [l/h]									Spray dimensions			
	Type	Mat. no.					Water column [mm WS]			Aspiration height [mm WS]									
		1Y	16				150	300	450	100	200	300	600	900					
	Stainless steel 316L	Stainless steel 303	p [bar]		V̇ _n [m³/h]	p air [bar]									Aspiration height [mm WS]	Ø D ₁ [mm]	Ø D ₂ [mm]		
20°	136.324.xx.A2	●	●	0.70	0.80	0.90	–	–	–	2.49	1.71	–	–	–	1.20	300	60	115	
					1.20	1.10	–	–	–	3.12	2.53	1.86	–	–	3.20	300	65	125	
					1.40	1.20	–	–	–	3.36	2.78	2.22	–	–	4.80	300	70	135	
					1.80	1.50	–	–	–	3.75	3.22	2.67	–	–	6.00	300	80	135	
					2.00	1.60	–	–	–	3.96	3.39	2.85	0.66	–	–	–	–	–	
					2.40	1.80	–	–	–	4.29	3.73	3.21	1.41	–	–	–	–	–	
					2.60	1.90	–	–	–	4.41	3.91	3.39	1.68	–	–	–	–	–	
					3.00	2.10	5.43	–	–	4.71	4.18	3.75	2.07	–	–	–	–	–	
					3.20	2.20	5.55	–	–	4.80	4.31	3.90	2.25	–	–	–	–	–	
					3.60	2.40	5.82	–	–	5.07	4.56	4.20	2.61	–	–	–	–	–	
					3.80	2.60	6.03	–	–	5.22	4.72	4.38	2.88	2.10	–	–	–	–	
					4.20	2.80	6.30	6.66	–	5.64	5.15	4.71	3.21	2.85	–	–	–	–	
					4.40	2.90	6.36	6.72	7.05	5.88	5.38	4.92	3.60	2.97	–	–	–	–	
					4.80	3.10	6.27	6.57	6.84	5.97	5.47	5.22	3.93	1.93	–	–	–	–	
					5.00	3.20	6.12	6.42	6.75	5.88	5.36	5.10	4.05	–	–	–	–	–	
					5.40	3.40	5.82	6.12	6.48	5.49	5.03	4.71	3.81	–	–	–	–	–	
					5.60	3.50	5.67	5.97	6.30	5.22	4.84	4.53	3.63	–	–	–	–	–	
					6.00	3.80	5.31	5.58	6.00	4.80	4.48	4.08	1.92	–	–	–	–	–	
	136.334.xx.A2	●	●	0.70	0.60	1.20	–	–	–	2.19	–	–	–	–	0.80	300	65	120	
					0.80	1.40	–	–	–	2.64	2.28	1.44	–	–	3.20	300	65	115	
					1.20	1.80	–	–	–	3.39	3.00	2.73	0.78	–	4.80	300	70	115	
					1.40	2.00	–	–	–	3.69	3.33	3.06	1.11	–	6.00	300	75	120	
					1.80	2.30	5.19	–	–	4.20	3.87	3.51	2.16	–	–	–	–	–	
					2.00	2.50	5.43	5.97	6.42	4.47	4.08	3.78	2.58	0.84	–	–	–	–	
					2.40	2.80	5.79	6.27	6.72	4.86	4.53	4.20	3.30	1.44	–	–	–	–	
					2.60	3.00	6.00	6.48	6.90	4.98	4.68	4.41	3.57	1.77	–	–	–	–	
					3.00	3.40	6.30	6.75	7.14	5.37	5.07	4.71	3.87	2.31	–	–	–	–	
					3.20	3.50	6.42	6.90	7.29	5.52	5.19	4.89	4.02	2.52	–	–	–	–	
					3.60	3.90	6.75	7.17	7.59	5.82	5.55	5.19	4.29	3.42	–	–	–	–	
					3.80	4.00	6.87	7.32	7.80	6.03	5.73	5.37	4.47	3.81	–	–	–	–	
					4.20	4.40	7.29	7.80	8.34	6.39	6.09	5.79	4.83	4.17	–	–	–	–	
					4.40	4.60	7.62	8.16	8.73	6.69	6.39	6.09	5.13	4.38	–	–	–	–	
					4.80	4.90	8.37	8.85	9.21	7.32	6.99	6.69	5.76	4.86	–	–	–	–	
					5.00	5.10	8.52	8.85	9.15	7.71	7.32	7.05	6.06	5.19	–	–	–	–	
					5.40	5.40	8.34	8.64	8.88	7.71	7.53	7.29	6.48	5.67	–	–	–	–	
					5.60	5.60	8.19	8.49	8.76	7.59	7.41	7.20	6.45	5.73	–	–	–	–	
					6.00	5.90	7.86	8.16	8.43	7.26	7.05	6.84	6.15	5.64	–	–	–	–	



Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Air		V̇ water [l/h]								Spray dimensions						
	Type	Mat. no.					Water column [mm WS]				Aspiration height [mm WS]										
		1Y	16				150	300	450	100	200	300	600	900	p air [bar]	Aspiration height [mm WS]	Ø D ₁ [mm]	Ø D ₂ [mm]			
		Stainless steel 316L	Stainless steel 303																		
20°	136.342.xx.A2	●	●	1.50	1.40	3.60	–	–	–	8.82	–	–	3.93	–	1.80	300	70	120			
1.80					4.20	–	–	–	9.45	8.49	7.50	5.22	3.39	3.00	300	70	120				
2.00					4.50	11.97	–	–	9.75	8.91	7.95	5.76	4.05	4.20	300	70	120				
2.40					5.20	12.18	–	–	10.26	9.51	8.73	6.75	5.19	6.00	300	70	120				
2.60					5.50	12.27	13.32	–	10.47	9.75	9.03	7.14	5.58	–	–	–	–				
3.00					6.10	12.27	13.23	14.16	10.65	10.05	9.42	7.74	6.39	–	–	–	–				
3.20					6.40	12.30	13.17	14.07	10.74	10.23	9.63	8.13	6.81	–	–	–	–				
3.60					7.00	12.42	13.20	14.07	11.01	10.53	10.05	8.85	7.86	–	–	–	–				
3.80					7.30	12.54	13.26	14.10	11.28	10.86	10.44	9.30	8.46	–	–	–	–				
4.20					8.00	13.17	13.83	14.49	12.12	11.76	11.40	10.41	9.69	–	–	–	–				
4.40					8.30	13.53	14.13	14.73	12.48	12.15	11.76	10.80	10.08	–	–	–	–				
4.80					8.90	13.98	14.52	15.15	12.99	12.63	12.18	11.19	10.29	–	–	–	–				
5.00					9.20	14.04	14.52	15.15	13.05	12.66	12.30	11.16	10.11	–	–	–	–				
5.40					9.80	13.74	14.31	14.94	12.66	12.24	11.79	10.62	9.21	–	–	–	–				
5.60					10.10	13.35	14.04	14.64	12.27	11.82	11.37	10.08	8.52	–	–	–	–				
6.00					10.80	12.21	12.90	–	10.98	10.50	10.17	8.70	7.05	–	–	–	–				
136.351.xx.A2					●	●	2.50	3.20	11.50	–	–	–	–	38.92	–	–	–	3.80	300	95	135
								3.60	12.50	–	–	–	45.73	41.94	–	33.17	–	4.60	300	95	145
	3.80	13.10	–	–				–	47.81	45.14	42.29	35.36	–	5.40	300	100	150				
	4.20	14.20	–	–				–	51.61	49.07	46.46	39.58	29.94	6.00	300	95	150				
	4.40	14.80	–	–				–	53.10	50.87	48.30	41.59	31.59	–	–	–	–				
	4.80	15.90	–	63.39				–	55.30	53.40	51.26	45.06	34.68	–	–	–	–				
	5.00	16.50	–	63.75				66.69	56.05	54.15	52.18	46.29	35.88	–	–	–	–				
	5.40	17.60	61.12	64.17				66.72	56.71	55.04	53.17	47.62	37.83	–	–	–	–				
	5.60	18.10	60.93	63.87				66.48	56.66	55.04	53.22	47.68	38.43	–	–	–	–				
6.00	19.20	59.89	62.88	65.43	55.69	53.98	52.11	45.78	37.05	–	–	–	–								

Ordering Type + Material no. = Ordering no.
example: 136.342.xx.A2 + 1Y = 136.342.1Y.A2



>> Pneumatic atomizing nozzles, flat fan, pressure principle, internal mixing
 Series 136.4






- Features:**
- Fine flat fan atomization
 - Pressure principle
 - Internal mixing

- Applications:**
- Humidification of goods
 - Cooling
 - Belt humidification



Series 136.4



Liquid connection G ₁	Air connection G ₂	Screw plug thread (size 11)	Weight [g] (Stainless steel 303)
1/4 BSPP	1/4 BSPP	5/16-24 UNF-2A	220

Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.																		
		1Y	16																	
		Stainless steel 316L	Stainless steel 303		p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	p water [bar]	B ₁ [mm]	B ₂ [mm]
45°	136.414.xx.A2	●	●	0.7	1.0	7.7	1.3	1.4	14.3	1.5	2.2	22.4	2.0	3.0	25.1	2.5	1.4	0.7	85	125
					1.2	6.0	1.5	1.6	13.0	1.6	2.6	20.0	2.3	3.4	23.0	2.8	2.4	1.5	100	145
					1.4	4.2	1.7	1.8	11.6	1.8	3.0	17.7	2.6	3.8	20.9	3.1	3.2	2.0	105	155
					1.6	2.7	1.9	2.0	10.2	2.0	3.4	15.5	3.0	4.2	18.9	3.5	3.8	3.0	120	170
					1.8	1.3	2.1	2.2	8.9	2.2	3.8	13.3	3.4	4.6	16.9	3.8	4.6	4.0	130	210
					-	-	-	2.4	7.4	2.4	4.2	11.0	3.7	5.0	14.9	4.2	-	-	-	-
					-	-	-	2.6	5.9	2.6	4.6	8.8	4.1	5.4	12.8	4.6	-	-	-	-
					-	-	-	2.8	4.6	2.8	5.0	6.6	4.5	5.8	10.8	5.0	-	-	-	-
					-	-	-	3.0	3.2	3.0	5.4	4.3	4.9	6.0	9.8	5.2	-	-	-	-
					-	-	-	3.2	2.1	3.2	5.8	2.5	5.3	-	-	-	-	-	-	-
					-	-	-	3.4	1.1	3.4	6.0	1.6	5.5	-	-	-	-	-	-	-
	136.443.xx.A2	●	●	1.0	1.2	13.9	1.5	1.6	26.6	1.6	3.0	37.1	2.6	3.6	45.6	2.9	1.2	0.7	110	165
					1.4	11.9	1.7	1.8	24.3	1.8	3.4	33.1	3.0	4.0	41.9	3.3	2.0	1.5	115	190
					1.6	9.5	1.9	2.0	22.0	2.0	3.8	29.5	3.4	4.4	38.3	3.7	2.8	2.0	145	190
					1.8	7.8	2.1	2.2	19.9	2.2	4.2	26.2	3.8	4.8	35.0	4.0	3.8	3.0	150	210
					-	-	-	2.4	18.0	2.4	4.6	23.0	4.2	5.2	31.8	4.5	4.8	4.0	160	230
					-	-	-	2.6	16.2	2.6	5.0	20.2	4.6	5.6	29.0	4.9	-	-	-	-
					-	-	-	2.8	14.4	2.8	5.4	17.6	4.9	6.0	26.2	5.2	-	-	-	-
					-	-	-	3.0	12.8	3.0	5.8	14.9	5.3	-	-	-	-	-	-	-
					-	-	-	3.2	11.3	3.2	6.0	14.1	5.5	-	-	-	-	-	-	-
					-	-	-	3.4	9.9	3.4	-	-	-	-	-	-	-	-	-	-
					-	-	-	3.6	8.8	3.6	-	-	-	-	-	-	-	-	-	-



Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions				
	Type	Mat. no.																			
		1Y	16		0.7				1.5			3.0			4.0						
		Stainless steel 316L	Stainless steel 303		p air [bar]	V̇ water [l/h]	V̇n air [m³/h]	p air [bar]	V̇ water [l/h]	V̇n air [m³/h]	p air [bar]	V̇ water [l/h]	V̇n air [m³/h]	p air [bar]	V̇ water [l/h]	V̇n air [m³/h]	p air [bar]	p water [bar]	B₁ [mm]	B₂ [mm]	
45°	136.462.xx.A2	●	●	1.5	1.2	19.0	2.6	2.0	22.0	2.0	3.0	61.8	4.0	3.8	76.1	4.6	1.2	0.7	120	140	
					1.6	12.2	3.4	2.4	18.0	2.4	3.4	51.9	4.8	4.0	70.4	5.1	2.4	1.5	120	170	
					2.0	9.4	4.1	2.8	14.4	2.8	3.8	44.6	5.8	4.2	65.6	5.5	3.2	2.0	120	175	
					2.4	7.1	4.8	3.2	11.3	3.2	4.2	39.0	6.6	4.4	61.3	5.9	3.8	3.0	140	205	
					2.8	5.7	5.4	3.6	8.8	3.6	4.6	33.4	7.4	4.6	57.3	6.4	6.0	4.0	145	205	
					3.2	5.0	6.0	4.0	8.1	3.9	5.0	29.4	8.1	4.8	54.1	6.7	-	-	-	-	
					3.6	3.6	6.6	4.4	6.2	4.3	5.4	25.5	8.9	5.0	51.3	7.2	-	-	-	-	
					4.0	3.2	7.2	4.8	4.6	4.6	5.8	22.0	9.6	5.2	49.3	7.7	-	-	-	-	
					4.4	2.2	7.8	5.2	3.2	4.9	6.0	20.6	9.9	5.4	46.5	8.2	-	-	-	-	
					-	-	-	5.6	1.6	5.3	-	-	-	5.6	43.7	8.6	-	-	-	-	
					-	-	-	5.8	0.8	5.4	-	-	-	5.8	41.3	8.9	-	-	-	-	
					-	-	-	-	-	-	-	-	-	6.0	39.0	9.3	-	-	-	-	
60°	136.425.xx.A2	●	●	0.5	0.8	6.5	1.2	1.4	9.4	1.7	2.4	13.2	2.5	2.4	16.1	2.5	1.2	0.7	155	195	
					1.2	5.5	1.6	1.8	8.7	2.1	2.6	12.9	2.7	2.8	15.5	2.9	2.2	1.5	165	255	
					1.6	4.7	1.9	2.2	7.9	2.4	3.0	12.3	3.0	3.2	15.0	3.2	3.0	2.0	170	265	
					2.0	4.0	2.3	2.6	7.2	2.7	3.4	11.8	3.4	3.6	14.5	3.5	3.4	3.0	200	330	
					2.4	3.2	2.6	3.0	6.4	3.1	3.8	11.1	3.7	4.0	13.9	3.8	5.6	4.0	200	330	
					2.8	2.6	2.9	3.4	5.7	3.4	4.2	10.4	4.0	4.4	13.4	4.1	-	-	-	-	
					3.0	2.2	3.1	3.8	5.1	3.7	4.6	9.8	4.3	4.8	12.8	4.5	-	-	-	-	
					-	-	-	4.0	4.8	3.9	5.0	9.2	4.6	5.2	12.2	4.8	-	-	-	-	
					-	-	-	4.4	4.2	4.2	5.4	8.6	5.0	5.6	11.7	5.1	-	-	-	-	
					-	-	-	4.8	3.6	4.5	5.8	8.1	5.3	6.0	11.2	5.4	-	-	-	-	
					-	-	-	5.2	2.8	4.8	6.0	7.8	5.4	-	-	-	-	-	-	-	
					-	-	-	5.6	2.2	5.1	-	-	-	-	-	-	-	-	-	-	
					-	-	-	6.0	1.6	5.5	-	-	-	-	-	-	-	-	-	-	
	136.452.xx.A2	●	●	1.5	1.0	18.8	3.9	1.8	31.0	5.3	3.2	50.1	7.7	3.8	70.7	8.2	1.0	0.7	130	185	
					1.4	8.6	5.7	2.0	25.4	6.3	3.6	39.5	9.4	4.2	58.6	9.6	1.8	1.5	150	240	
					1.8	7.4	7.0	2.2	20.1	7.2	4.0	31.3	11.2	4.6	48.6	11.2	2.6	2.0	155	245	
					2.2	4.1	8.4	2.4	15.5	8.0	4.4	24.0	12.9	5.0	41.2	13.1	3.6	3.0	175	280	
					2.6	1.0	9.8	2.6	12.4	8.9	4.8	17.7	14.5	5.4	33.6	14.8	5.0	4.0	180	285	
					2.8	0.1	10.3	2.8	10.4	9.6	5.2	13.4	16.0	5.8	27.5	16.4	-	-	-	-	
					-	-	-	-	-	-	5.6	10.6	17.5	6.0	24.4	17.2	-	-	-	-	
					-	-	-	-	-	-	6.0	8.6	18.8	-	-	-	-	-	-	-	
80°	136.433.xx.A2	●	●	0.4	1.0	11.6	2.0	1.8	18.3	2.8	3.0	31.0	3.7	3.8	37.5	4.4	1.4	0.7	150	210	
					1.2	8.1	2.4	2.0	15.3	3.2	3.4	25.4	4.4	4.2	32.4	5.0	2.2	1.5	185	255	
					1.4	5.3	2.8	2.2	12.2	3.6	3.8	20.6	5.1	4.6	27.7	5.7	3.0	2.0	205	300	
					1.6	3.7	3.2	2.4	9.8	4.0	4.2	16.3	5.9	5.0	23.4	6.5	3.8	4.0	300	485	
					-	-	-	2.6	7.6	4.3	4.6	12.5	6.6	5.4	19.4	7.2	5.2	4.0	260	395	
					-	-	-	2.8	5.9	4.7	5.0	9.3	7.3	5.8	15.9	7.9	-	-	-	-	
					-	-	-	3.0	4.4	5.0	5.4	6.5	8.0	6.0	14.2	8.3	-	-	-	-	
					-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

Ordering Type + Material no. = Ordering no.
example: 136.462.xx.A2 + 1Y = 136.462.1Y.A2




>>
 Pneumatic atomizing nozzles, flat fan, siphon principle, internal mixing
 Series 136.5



- Features:**
- Particularly fine flat fan atomization
 - Siphon principle
 - Internal mixing

- Applications:**
- Humidification of goods
 - Cooling
 - Belt humidification

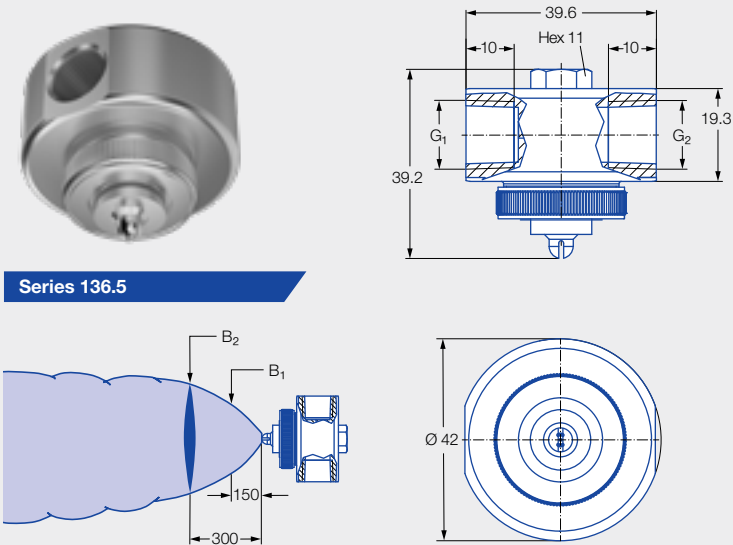

Series 136.5

Liquid connection G ₁	Air connection G ₂	Screw plug thread (size 11)	Weight [g] (Stainless steel 303 SS)
1/4 BSPP	1/4 BSPP	5/16-24 UNF-2A	220

Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Air		V̇ water [l/h]									Spray dimensions			
	Type	Mat. no.					Water column [mm WS]			Aspiration height [mm WS]									
		1Y	16																
		Stainless steel 316L	Stainless steel 303		p [bar]	V̇ _n [m³/h]	150	300	450	100	200	300	600	900	p air [bar]	Aspiration height [mm WS]	B ₁ [mm]	B ₂ [mm]	
60°	136.516.xx.A2	●	●	0.40	0.80	1.80	–	–	–	1.62	1.53	–	1.17	0.88	1.00	300	130	165	
					1.20	2.20	1.89	2.13	2.19	1.80	1.77	1.68	1.41	1.16	3.00	300	150	200	
					1.40	2.50	1.95	2.16	2.25	1.86	1.80	1.68	1.47	1.21	4.60	300	170	225	
					1.80	2.90	1.98	2.22	2.34	1.89	1.86	1.77	1.53	1.26	6.00	300	180	240	
					2.00	3.10	1.95	2.19	2.31	1.89	1.80	1.68	1.50	1.26	–	–	–	–	
					2.40	3.50	1.89	2.25	2.25	1.83	1.71	1.68	1.47	1.22	–	–	–	–	
					2.60	3.70	1.83	2.25	2.25	1.74	1.71	1.59	1.44	1.18	–	–	–	–	
					3.00	4.20	1.74	2.01	2.22	1.71	1.62	1.56	1.44	1.28	–	–	–	–	
					3.20	4.40	1.71	1.92	2.16	1.65	1.62	1.59	1.59	1.38	–	–	–	–	
					3.60	4.80	1.74	1.83	2.10	1.80	1.77	1.74	1.68	1.47	–	–	–	–	
					3.80	5.00	1.92	1.80	2.10	1.86	1.86	1.80	1.71	1.49	–	–	–	–	
					4.20	5.50	1.98	2.04	2.19	1.92	1.83	1.83	1.68	1.70	–	–	–	–	
					4.40	5.70	1.95	2.04	2.19	1.89	1.86	1.80	1.74	1.77	–	–	–	–	
					4.80	6.10	2.01	2.04	2.16	2.01	2.01	2.04	2.04	1.98	–	–	–	–	
					5.00	6.30	2.10	2.13	2.22	2.19	2.19	2.16	2.10	1.93	–	–	–	–	
					5.40	6.80	2.31	2.34	2.28	2.25	2.22	2.16	2.04	1.86	–	–	–	–	
					5.60	7.00	2.31	2.28	2.25	2.19	2.16	2.10	2.01	1.80	–	–	–	–	
					6.00	7.40	2.22	2.22	2.22	2.10	2.10	2.04	1.92	1.79	–	–	–	–	



Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Air		V̇ water [l/h]								Spray dimensions			
	Type	Mat. no.					Water column [mm WS]				Aspiration height [mm WS]							
		1Y	16				150	300	450	100	200	300	600	900	p air [bar]	Aspiration height [mm WS]	B ₁ [mm]	B ₂ [mm]
		Stainless steel 316L	Stainless steel 303															
60°	136.525.xx.A2	●	●	0.50	0.60	1.60	–	–	–	2.00	–	–	–	–	1.00	300	155	240
0.80					1.90	–	–	–	2.21	2.10	1.98	–	–	3.00	300	200	295	
1.20					2.30	2.75	2.84	–	2.53	2.39	2.33	2.04	1.69	4.60	300	215	325	
1.40					2.60	2.84	2.90	3.05	2.63	2.51	2.42	2.14	1.82	6.00	300	250	400	
1.80					3.00	2.96	3.01	3.16	2.78	2.64	2.56	2.20	1.88	–	–	–	–	
2.00					3.30	2.94	3.02	3.16	2.73	2.69	2.58	2.18	1.82	–	–	–	–	
2.40					3.70	2.87	2.97	3.10	2.59	2.50	2.38	2.01	1.68	–	–	–	–	
2.60					3.90	2.82	2.86	3.04	2.49	2.46	2.29	1.91	1.62	–	–	–	–	
3.00					4.40	2.59	2.71	2.85	2.23	2.11	2.04	1.73	1.72	–	–	–	–	
3.20					4.60	2.48	2.51	2.71	2.09	1.96	1.91	1.74	1.87	–	–	–	–	
3.60					5.10	2.37	2.31	2.51	2.25	2.18	2.19	1.98	1.90	–	–	–	–	
3.80					5.30	2.34	2.37	2.52	2.22	2.23	2.15	1.99	1.85	–	–	–	–	
4.20					5.70	2.35	2.35	2.43	2.20	2.13	2.11	1.94	1.82	–	–	–	–	
4.40					6.00	2.30	2.32	2.44	2.20	2.07	2.05	1.96	1.83	–	–	–	–	
4.80					6.40	2.25	2.24	2.41	2.12	2.03	2.08	1.90	2.12	–	–	–	–	
5.00					6.60	2.20	2.21	2.37	2.09	2.03	1.98	2.25	2.27	–	–	–	–	
5.40					7.10	2.52	2.23	2.36	2.60	2.55	2.49	2.26	2.08	–	–	–	–	
5.60					7.30	2.50	2.45	2.58	2.57	2.54	2.39	2.16	2.02	–	–	–	–	
6.00					7.80	2.57	2.61	2.76	2.37	2.40	2.18	1.94	1.80	–	–	–	–	

Ordering Type + Material no. = Ordering no.
example: 136.525.xx.A2 + 1Y = 136.525.1Y.A2



>>
 Pneumatic atomizing nozzles, flat fan, pressure principle, external mixing

 Series 136.6




Features:



- Fine flat fan atomization
- Liquid pressure principle
- External mixing

Applications:

- Humidification of goods
- Cooling
- Belt humidification
- Atomization of viscous liquids



Series 136.6



Liquid connection G ₁	Air connection G ₂	Screw plug thread (size 11)	Weight [g] (Stainless steel 303)
1/4 BSPP	1/4 BSPP	5/16-24 UNF-2A	220

Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.			0.07			0.15			0.30			0.35			p air [bar]	p water [bar]	B ₁ [mm]	B ₂ [mm]
		1Y	16		p air [bar]	V̇ water [l/h]	V̇ _n air [m³/h]	p air [bar]	V̇ water [l/h]	V̇ _n air [m³/h]	p air [bar]	V̇ water [l/h]	V̇ _n air [m³/h]							
		Stainless steel 316L	Stainless steel 303																	
45°	136.616.xx.A2	●	●	0.40	0.80	1.68	2.50	0.80	2.43	2.40	0.80	3.42	2.50	1.00	3.69	2.80	1.40	0.07	80	115
					1.20	1.80	3.10	1.00	2.46	2.90	1.20	3.48	3.10	1.40	3.81	3.40	2.20	0.15	90	130
					1.60	1.92	3.70	1.40	2.58	3.60	1.60	3.51	3.70	1.80	3.87	4.00	3.20	0.20	90	135
					2.00	2.10	4.30	1.80	2.61	4.20	2.00	3.63	4.30	2.20	3.84	4.60	4.00	0.30	95	145
					2.40	2.07	4.90	2.20	2.76	4.80	2.40	3.63	4.90	2.60	3.90	5.20	5.00	0.35	100	145
					2.80	2.19	5.50	2.60	2.73	5.40	2.80	3.63	5.50	3.00	3.93	5.80	-	-	-	-
					3.20	2.19	6.10	3.00	2.73	6.00	3.20	3.63	6.10	3.40	3.90	6.40	-	-	-	-
					3.60	2.22	6.70	3.60	2.76	6.70	3.60	3.66	6.70	3.80	3.93	7.00	-	-	-	-
					4.00	2.22	7.30	4.00	2.76	7.30	4.00	3.69	7.30	4.20	3.96	7.60	-	-	-	-
					4.40	2.22	7.90	4.40	2.76	7.90	4.40	3.69	7.90	4.60	3.93	8.20	-	-	-	-
					4.80	2.22	8.50	4.80	2.76	8.50	4.80	3.69	8.40	5.00	3.93	8.80	-	-	-	-
					5.20	2.22	9.10	5.20	2.76	9.10	5.20	3.66	9.10	5.40	3.93	9.40	-	-	-	-
					5.60	2.22	9.60	5.60	2.76	9.70	5.60	3.66	9.60	5.80	3.87	10.00	-	-	-	-
					6.00	2.22	10.20	6.00	2.73	10.20	6.00	3.66	10.20	6.00	3.87	10.20	-	-	-	-



Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.																		
		1Y	16		0.07			0.15			0.30			0.35						
		Stainless steel 316L	Stainless steel 303		p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	p water [bar]	B ₁ [mm]	B ₂ [mm]
45°	136.635.xx.A2	●	●	0.50	0.80	2.37	2.50	0.80	3.45	2.40	0.80	4.80	2.40	1.00	5.34	2.80	1.40	0.07	85	120
					1.20	2.61	3.10	1.20	3.54	3.10	1.20	5.10	3.10	1.40	5.37	3.40	2.20	0.15	95	130
					1.60	2.85	3.70	1.60	3.66	3.70	1.60	5.01	3.70	1.80	5.46	4.00	3.20	0.20	95	135
					2.00	3.03	4.30	2.00	3.72	4.30	2.10	5.10	4.30	2.20	5.46	4.60	4.00	0.30	100	140
					2.40	3.12	4.90	2.40	3.90	4.90	2.40	5.13	4.90	2.60	5.58	5.20	5.00	0.35	100	145
					2.80	3.15	5.50	2.80	3.87	5.50	2.80	5.16	5.50	3.00	5.58	5.80	-	-	-	-
					3.20	3.21	6.10	3.20	3.96	6.10	3.20	5.22	6.10	3.40	5.58	6.40	-	-	-	-
					3.60	3.18	6.70	3.60	3.96	6.70	3.60	5.25	6.70	3.80	5.58	7.00	-	-	-	-
					4.00	3.21	7.30	4.00	3.96	7.20	4.00	5.22	7.30	4.20	5.58	7.60	-	-	-	-
					4.40	3.21	7.90	4.40	3.96	7.90	4.40	5.22	7.90	4.60	5.58	8.10	-	-	-	-
					4.80	3.21	8.40	4.80	3.96	8.40	4.80	5.22	8.40	5.00	5.58	8.70	-	-	-	-
					5.20	3.21	9.00	5.20	3.96	9.00	5.20	5.22	9.00	5.40	5.58	9.30	-	-	-	-
					5.60	3.12	9.60	5.60	3.90	9.60	5.60	5.22	9.60	5.80	5.58	9.90	-	-	-	-
					6.00	3.18	10.20	6.00	3.84	10.20	6.00	5.16	10.20	6.00	5.58	10.20	-	-	-	-
	136.654.xx.A2	●	●	0.70	0.80	5.25	2.40	0.80	7.29	2.40	1.20	10.11	3.10	1.60	11.07	3.70	1.40	0.07	95	135
					1.20	5.64	3.10	1.20	7.44	3.10	1.60	10.23	3.70	2.00	11.22	4.30	2.20	0.15	100	150
					1.60	5.79	3.70	1.60	7.62	3.70	2.00	10.38	4.30	2.40	11.28	4.90	3.20	0.20	105	160
					2.00	6.18	4.30	2.00	7.86	4.30	2.40	10.47	4.90	2.80	11.31	5.50	4.00	0.30	105	160
					2.40	6.24	4.90	2.40	7.92	4.90	2.80	10.59	5.50	3.20	11.43	6.10	5.00	0.35	105	160
					2.80	6.27	5.50	2.80	8.04	5.50	3.20	10.59	6.10	3.60	11.46	6.60	-	-	-	-
					3.20	6.39	6.10	3.20	8.13	6.10	3.60	10.62	6.70	4.00	11.43	7.20	-	-	-	-
					3.60	6.42	6.60	3.60	8.13	6.70	4.00	10.62	7.20	4.40	11.37	7.80	-	-	-	-
					4.00	6.45	7.20	4.00	8.13	7.20	4.40	10.62	7.80	4.80	11.37	8.40	-	-	-	-
					4.40	6.42	7.80	4.40	8.07	7.80	4.80	10.59	8.40	5.20	11.34	9.00	-	-	-	-
					4.80	6.30	8.40	4.80	8.04	8.40	5.20	10.56	9.00	5.60	11.22	9.60	-	-	-	-
					5.20	6.24	9.00	5.20	7.86	9.00	5.60	10.50	9.60	6.00	11.16	10.10	-	-	-	-
					5.60	6.09	9.60	5.60	7.83	9.60	6.00	10.35	10.20	-	-	-	-	-	-	-
					6.00	5.85	10.20	6.00	7.59	10.20	-	-	-	-	-	-	-	-	-	-
60°	136.626.xx.A2	●	●	0.40	0.80	1.83	2.80	0.80	2.49	2.80	0.80	3.48	2.80	0.80	3.78	2.80	1.60	0.07	85	135
					1.20	1.98	3.60	1.20	2.58	3.50	1.20	3.60	3.50	1.20	3.87	3.60	2.40	0.15	90	140
					1.60	2.10	4.30	1.60	2.70	4.20	1.60	3.66	4.30	1.60	3.90	4.20	3.20	0.20	90	140
					2.00	2.16	4.90	2.00	2.82	4.90	2.00	3.69	4.90	2.00	3.96	4.90	4.00	0.30	100	145
					2.40	2.25	5.60	2.40	2.85	5.60	2.40	3.69	5.60	2.40	3.96	5.60	5.20	0.35	105	150
					2.80	2.34	6.30	2.80	2.88	6.30	2.80	3.72	6.30	2.80	4.02	6.30	-	-	-	-
					3.20	2.31	7.00	3.20	2.88	7.00	3.20	3.78	7.00	3.20	3.99	7.00	-	-	-	-
					3.60	2.34	7.60	3.60	2.88	7.70	3.60	3.78	7.60	3.60	4.02	7.70	-	-	-	-
					4.00	2.40	8.40	4.00	2.94	8.40	4.00	3.81	8.30	4.00	4.05	8.30	-	-	-	-
					4.40	2.40	9.00	4.40	2.91	9.00	4.40	3.81	9.00	4.40	4.02	9.00	-	-	-	-
					4.80	2.40	9.70	4.80	2.97	9.70	4.80	3.81	9.70	4.80	4.08	9.70	-	-	-	-
					5.20	2.43	10.40	5.20	2.97	10.40	5.20	3.81	10.40	5.20	4.05	10.40	-	-	-	-
					5.60	2.43	11.20	5.60	2.97	11.10	5.60	3.81	11.10	5.60	4.05	11.00	-	-	-	-
					6.00	2.43	11.80	6.00	2.97	11.80	6.00	3.81	11.80	6.00	4.05	11.80	-	-	-	-





Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.																		
		1Y	16		0.07			0.15			0.30			0.35						
		Stainless steel 316L	Stainless steel 303		p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	p water [bar]	B ₁ [mm]	B ₂ [mm]
60°	136.645.xx.A2	●	●	0.50	0.80	2.73	2.80	0.80	3.69	2.80	1.00	5.16	3.20	1.00	5.55	3.10	1.60	0.07	100	140
					1.20	2.82	3.50	1.20	3.87	3.50	1.40	5.31	3.90	1.40	5.64	3.90	2.40	0.15	110	150
					1.60	3.09	4.20	1.60	3.99	4.20	1.80	5.37	4.60	1.80	5.67	4.60	3.20	0.20	115	155
					2.00	3.27	4.90	2.00	4.11	4.90	2.20	5.37	5.20	2.20	5.76	5.20	4.00	0.30	125	160
					2.40	3.36	5.60	2.40	4.17	5.60	2.60	5.43	5.90	2.60	5.82	5.90	5.20	0.35	130	165
					2.80	3.39	6.20	2.80	4.20	6.30	3.00	5.49	6.60	3.00	5.82	6.60	-	-	-	-
					3.20	3.45	7.00	3.20	4.26	7.00	3.40	5.49	7.20	3.40	5.88	7.30	-	-	-	-
					3.60	3.48	7.60	3.60	4.29	7.60	3.80	5.55	8.00	3.80	5.88	8.00	-	-	-	-
					4.00	3.51	8.30	4.00	4.32	8.30	4.20	5.55	8.60	4.20	5.88	8.70	-	-	-	-
					4.40	3.54	9.00	4.40	4.35	9.00	4.60	5.58	9.30	4.60	5.94	9.30	-	-	-	-
					4.80	3.57	9.70	4.80	4.38	9.70	5.00	5.55	10.00	5.00	5.94	10.10	-	-	-	-
					5.20	3.57	10.40	5.20	4.35	10.40	5.40	5.61	10.70	5.40	5.94	10.70	-	-	-	-
					5.60	3.60	11.00	5.60	4.35	11.10	5.80	5.61	11.40	5.80	5.94	11.40	-	-	-	-
					6.00	3.60	11.70	6.00	4.38	11.70	6.00	5.61	11.80	6.00	5.97	11.80	-	-	-	-
	136.664.xx.A2	●	●	0.70	0.80	5.46	2.80	1.00	7.68	3.20	1.00	10.50	3.20	1.00	11.28	3.20	1.60	0.07	110	140
					1.20	5.91	3.50	1.40	7.95	3.90	1.40	10.71	3.90	1.40	11.52	3.90	2.40	0.15	130	160
					1.60	6.15	4.20	1.80	8.13	4.60	1.80	10.83	4.60	1.80	11.58	4.50	3.20	0.20	140	170
					2.00	6.42	4.90	2.20	8.34	5.30	2.20	11.01	5.30	2.20	11.70	5.20	4.00	0.30	150	180
					2.40	6.63	5.60	2.60	8.46	5.90	2.60	11.07	5.90	2.60	11.79	5.90	5.20	0.35	155	200
					2.80	6.75	6.30	3.00	8.58	6.60	3.00	11.16	6.60	3.00	11.88	6.60	-	-	-	-
					3.20	6.93	6.90	3.40	8.67	7.30	3.40	11.19	7.30	3.40	11.94	7.30	-	-	-	-
					3.60	6.99	7.60	3.80	8.73	8.00	3.80	11.25	8.00	3.80	12.00	8.00	-	-	-	-
					4.00	7.05	8.30	4.20	8.76	8.70	4.20	11.28	8.60	4.20	12.03	8.70	-	-	-	-
					4.40	7.11	9.00	4.60	8.82	9.30	4.60	11.34	9.40	4.60	12.06	9.40	-	-	-	-
					4.80	7.11	9.70	5.00	8.82	10.10	5.00	11.37	10.00	5.00	12.06	10.10	-	-	-	-
					5.20	7.17	10.40	5.40	8.82	10.70	5.40	11.37	10.70	5.40	12.09	10.70	-	-	-	-
					5.60	7.11	11.10	5.80	8.85	11.40	5.80	11.40	11.40	5.80	12.12	11.40	-	-	-	-
					6.00	7.20	11.80	6.00	8.85	11.80	6.00	11.40	11.70	6.00	12.15	11.80	-	-	-	-
	136.673.xx.A2	●	●	1.00	0.60	13.89	5.60	1.00	18.51	7.60	1.60	24.81	10.20	2.00	26.61	11.80	1.60	0.07	115	160
					1.00	14.28	7.60	1.40	18.51	9.30	2.00	24.66	11.70	2.40	26.31	13.50	2.40	0.15	120	160
					1.40	14.28	9.40	1.80	18.33	11.00	2.40	24.42	13.30	2.80	25.65	15.10	3.20	0.20	120	160
					1.80	14.10	11.00	2.20	17.91	12.70	2.80	23.52	15.10	3.20	24.57	16.60	4.00	0.30	120	165
					2.20	13.68	12.60	2.60	17.37	14.20	3.20	22.47	16.60	3.60	23.28	18.30	5.20	0.35	120	170
					2.60	13.62	14.20	3.00	16.65	15.90	3.60	21.30	18.40	4.00	21.93	19.90	-	-	-	-
					3.00	13.29	18.90	3.40	15.93	17.30	4.00	20.10	19.80	4.40	20.34	21.50	-	-	-	-
					3.40	12.87	17.40	3.80	15.06	19.00	4.40	18.78	21.50	4.80	19.20	23.10	-	-	-	-
					3.80	12.57	19.10	4.20	14.58	20.80	4.80	17.52	23.20	5.20	18.06	24.70	-	-	-	-
					4.20	12.18	20.80	4.60	13.83	22.30	5.20	16.71	24.80	5.60	17.01	26.30	-	-	-	-
					4.60	11.79	22.40	5.00	13.08	24.00	5.60	15.63	26.40	6.00	15.87	28.00	-	-	-	-
					5.00	10.95	24.00	5.40	12.30	25.60	5.80	15.12	27.30	-	-	-	-	-	-	-
					5.40	10.44	25.60	5.80	11.52	27.20	6.00	14.76	28.00	-	-	-	-	-	-	-
					5.80	9.57	27.20	6.00	11.04	28.10	-	-	-	-	-	-	-	-	-	-
					6.00	8.97	28.10	-	-	-	-	-	-	-	-	-	-	-	-	-



Spray angle	Ordering no.			Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.																		
		1Y	16		0.07			0.15			0.30			0.35						
		Stainless steel 316L	Stainless steel 303		p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	p water [bar]	B ₁ [mm]	B ₂ [mm]
60°	136.682.xx.A2	●	●	1.50	1.00	22.41	7.50	1.40	28.95	9.30	1.80	41.22	11.10	2.00	44.04	11.80	1.60	0.07	110	155
					1.40	20.19	9.30	1.80	26.07	10.90	2.20	34.92	12.60	2.40	39.09	13.40	2.40	0.15	120	155
					1.80	18.75	11.00	2.20	23.94	12.50	2.60	33.18	14.20	2.80	35.16	15.10	3.20	0.20	120	160
					2.20	17.88	12.50	2.60	22.23	14.30	3.00	30.45	15.90	3.20	32.22	16.70	4.00	0.30	120	165
					2.60	17.10	14.20	3.00	21.12	15.90	3.40	28.29	17.50	3.60	30.18	18.30	5.20	0.35	120	175
					3.00	16.47	15.90	3.40	20.10	17.50	3.80	26.64	19.10	4.00	28.32	19.90	-	-	-	-
					3.40	16.08	17.50	3.80	19.44	19.10	4.20	25.35	20.70	4.40	26.94	21.50	-	-	-	-
					3.80	15.90	19.10	4.20	18.99	20.70	4.60	24.24	22.30	4.80	25.59	23.10	-	-	-	-
					4.20	15.90	20.70	4.60	18.45	22.30	5.00	23.13	24.00	5.20	24.36	24.80	-	-	-	-
					4.60	15.81	22.30	5.00	18.18	24.00	5.40	22.14	25.50	5.60	23.28	26.40	-	-	-	-
					5.00	15.21	23.90	5.40	17.25	25.40	5.80	21.12	27.20	6.00	22.17	28.00	-	-	-	-
					5.40	13.92	25.50	5.80	15.72	27.20	6.00	20.67	28.00	-	-	-	-	-	-	-
					5.80	12.09	27.20	6.00	14.91	28.00	-	-	-	-	-	-	-	-	-	-
					6.00	11.07	28.00	-	-	-	-	-	-	-	-	-	-	-	-	-
	136.691.xx.A2	●	●	2.50	1.40	52.00	13.80	2.00	67.30	17.50	2.60	92.30	21.20	2.60	102.10	21.20	1.60	0.07	150	200
					1.80	50.00	16.30	2.40	64.60	20.10	3.00	87.70	23.60	3.00	97.20	23.70	2.40	0.15	160	205
					2.20	48.60	18.80	2.80	62.00	22.50	3.40	84.30	26.00	3.40	92.50	26.10	3.20	0.20	160	205
					2.60	47.50	21.30	3.20	60.40	24.90	3.80	80.70	28.50	3.80	88.40	28.50	4.00	0.30	160	210
					3.00	46.50	23.70	3.60	58.00	27.30	4.20	77.00	30.90	4.20	85.20	31.00	5.20	0.35	150	210
					3.40	45.40	26.10	4.00	56.20	29.80	4.60	74.40	33.40	4.60	81.30	33.40	-	-	-	-
					3.80	44.40	28.60	4.40	54.20	32.10	5.00	71.10	35.90	5.00	78.20	35.80	-	-	-	-
					4.20	42.90	31.00	4.80	52.40	34.70	5.40	68.10	38.30	5.40	74.30	38.20	-	-	-	-
					4.60	41.50	33.40	5.20	49.90	37.10	5.80	64.30	40.80	5.80	71.10	40.70	-	-	-	-
					5.00	39.90	35.80	5.60	48.10	39.50	6.00	63.20	42.00	6.00	68.90	41.90	-	-	-	-
					5.40	38.90	38.30	6.00	46.40	42.00	-	-	-	-	-	-	-	-	-	-
					5.60	38.50	39.40	-	-	-	-	-	-	-	-	-	-	-	-	-

Ordering Type + Material no. = Ordering no.
example: 136.682.xx.A2 + 1Y = 136.682.1Y.A2



>> Pneumatic atomizing nozzles, full cone, pressure principle, internal mixing
 Series 166.1



Features:


- Version with magnetic valve
- Fine full cone atomization
- Liquid pressure principle
- Internal mixing

Applications:

- Humidification of air
- Cooling

Technical data:

- Operating pressure: 0–6 bar
- Voltage: 24 V DC
- Power: 8 W
- Switching frequency: Approx. 500/min
- Protective system: IP 67
- Ambient temperature: +10 °C/+50 °C
- Cable length: 1,000 mm
- Material of gasket: EPDM

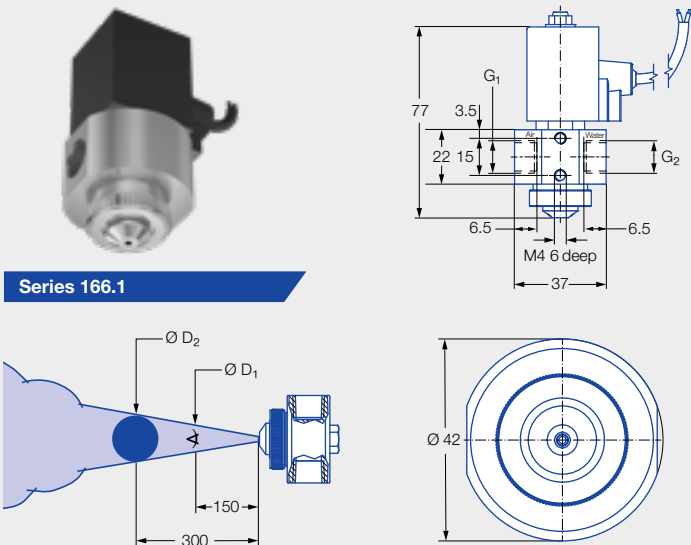

Air connection G ₁	Water connection G ₂	Weight [g]
1/4 BSPP	1/4 BSPP	410

Spray angle	Ordering no.		Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.		0.7			1.5			3.0			4.0			p air [bar]	p water [bar]	Ø D ₁ [mm]	Ø D ₂ [mm]
		16		p air [bar]	v̇ water [l/h]	v̇ _n air [m³/h]	p air [bar]	v̇ water [l/h]	v̇ _n air [m³/h]	p air [bar]	v̇ water [l/h]	v̇ _n air [m³/h]	p air [bar]	v̇ water [l/h]	v̇ _n air [m³/h]				
20°	166.115.xx.A2	●	0.5	0.4	5.9	0.3	1.4	5.8	0.8	2.4	9.1	1.1	3.0	11.0	1.2	0.8	0.7	60	100
				0.8	3.8	0.6	1.8	4.1	1.0	2.8	7.5	1.2	3.4	9.6	1.4	1.8	1.5	60	95
				1.2	1.7	0.9	2.2	2.2	1.4	3.2	5.9	1.5	3.8	8.2	1.6	2.6	2.0	60	100
				–	–	–	2.6	1.2	1.7	3.6	4.4	1.8	4.2	6.8	1.9	3.2	3.0	55	95
				–	–	–	–	–	–	4.0	2.9	2.1	4.6	5.5	2.2	4.4	4.0	55	100
				–	–	–	–	–	–	4.4	2.0	2.5	5.0	4.1	2.5	–	–	–	–
				–	–	–	–	–	–	4.8	1.1	2.8	5.4	2.9	2.8	–	–	–	–
				–	–	–	–	–	–	5.2	0.4	3.0	5.8	2.1	3.1	–	–	–	–
	166.125.xx.A2	●	0.5	0.8	4.7	1.5	1.2	7.0	1.8	2.8	9.1	3.3	3.4	10.6	3.9	1.4	0.7	55	90
				1.2	4.4	1.9	1.6	6.6	2.2	3.2	8.7	3.7	3.8	10.3	4.3	2.2	1.5	55	95
				1.6	4.0	2.3	2.0	6.2	2.6	3.6	8.4	4.1	4.2	9.9	4.6	2.8	2.0	55	100
				2.0	3.5	2.6	2.4	5.8	3.0	4.0	8.0	4.5	4.6	9.6	5.0	3.4	3.0	60	100
				2.4	3.0	3.0	2.8	5.4	3.4	4.4	7.7	4.8	5.0	9.3	5.4	4.2	4.0	60	100
				2.8	2.7	3.2	3.2	4.9	3.7	4.8	7.3	5.2	5.4	8.9	5.8	–	–	–	–
				3.2	2.0	3.7	3.6	4.4	4.1	5.2	7.0	5.6	5.8	8.6	6.1	–	–	–	–
				3.6	1.6	4.1	4.0	3.9	4.5	5.6	6.6	5.9	–	–	–	–	–	–	–
				4.0	1.3	4.5	4.4	3.5	4.8	6.0	6.2	6.3	–	–	–	–	–	–	–
				4.4	1.0	4.9	4.8	3.1	5.2	–	–	–	–	–	–	–	–	–	–
				4.8	0.6	5.2	5.2	2.7	5.6	–	–	–	–	–	–	–	–	–	–
				–	–	–	5.6	2.3	5.9	–	–	–	–	–	–	–	–	–	–
				–	–	–	6.0	1.9	6.3	–	–	–	–	–	–	–	–	–	–



Spray angle	Ordering no.		Narrow- est free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.		0.7			1.5			3.0			4.0						
		16		Stainless steel 303	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	ṽ water [l/h]	ṽ _n air [m³/h]	p air [bar]	p water [bar]	Ø D ₁ [mm]
20°	166.134.xx.A2	●	0.7		1.2	13.2	2.7	2.0	19.4	3.9	3.0	28.3	5.2	3.8	32.6	6.2	1.8	0.7	55
				1.6	12.4	3.3	2.4	18.1	4.4	3.4	27.5	5.7	4.2	32.0	6.8	2.8	1.5	60	105
				2.0	11.8	3.9	2.8	17.3	4.9	3.8	26.7	6.3	4.6	31.3	7.3	3.8	2.0	60	105
				2.4	11.4	4.4	3.2	16.7	5.5	4.2	25.9	6.8	5.0	30.6	7.8	5.2	3.0	65	110
				2.8	11.1	4.9	3.6	16.1	6.0	4.6	25.0	7.3	5.4	29.9	8.4	6.0	4.0	65	110
				3.2	10.8	5.5	4.0	15.6	6.5	5.0	24.2	7.8	5.8	29.3	8.9	-	-	-	-
				3.6	10.6	6.0	4.4	15.2	7.0	5.4	23.6	8.4	-	-	-	-	-	-	-
				4.0	10.4	6.5	4.8	15.0	7.6	5.8	23.1	8.9	-	-	-	-	-	-	-
				4.4	10.1	7.0	5.2	14.6	8.1	-	-	-	-	-	-	-	-	-	-
				4.8	9.9	7.6	5.6	14.1	8.6	-	-	-	-	-	-	-	-	-	-
				5.2	9.5	8.1	6.0	13.8	9.1	-	-	-	-	-	-	-	-	-	-
				5.6	9.0	8.6	-	-	-	-	-	-	-	-	-	-	-	-	-
				6.0	8.5	9.2	-	-	-	-	-	-	-	-	-	-	-	-	-
	166.142.xx.A2	●	2.5	1.4	24.2	5.1	1.6	53.4	4.7	3.2	70.8	8.0	3.8	93.2	9.2	0.8	0.7	60	100
				1.8	20.4	6.3	2.0	42.6	5.9	3.6	62.5	9.2	4.2	83.1	10.1	1.6	1.5	65	105
				2.2	20.0	7.2	2.4	35.3	7.2	4.0	55.7	10.6	4.6	75.3	11.3	3.0	2.0	60	105
				2.6	19.3	8.2	2.8	30.4	8.4	4.4	49.3	11.7	5.0	69.0	12.5	4.0	3.0	65	110
				3.0	17.6	9.3	3.2	28.6	9.5	4.8	44.6	12.9	5.4	63.4	13.7	6.0	4.0	65	110
				3.4	16.5	10.4	3.6	28.2	10.5	5.2	41.9	14.1	5.8	57.5	14.9	-	-	-	-
				3.8	17.0	11.4	4.0	27.3	11.5	5.6	40.4	15.1	-	-	-	-	-	-	-
				4.2	16.3	12.4	4.4	25.9	12.5	6.0	39.7	16.1	-	-	-	-	-	-	-
				4.6	15.1	13.3	4.8	24.3	13.5	-	-	-	-	-	-	-	-	-	-
				5.0	14.0	14.3	5.2	22.3	14.6	-	-	-	-	-	-	-	-	-	-
				5.4	13.1	15.3	5.6	21.8	15.7	-	-	-	-	-	-	-	-	-	-
				5.8	12.4	16.2	6.0	21.4	16.7	-	-	-	-	-	-	-	-	-	-

Ordering Type + Material no. = Ordering no.
example: 166.134.xx.A2 + 16 = 166.134.16.A2



Pneumatic atomizing nozzles, full cone, pressure principle, internal mixing


 Series 166.2



- Features:**
- Version with magnetic valve
 - Fine full cone atomization
 - Pressure principle
 - Internal mixing
 - Especially wide spray angle of 60°

- Applications:**
- Humidification of air
 - Cooling

- Technical data:**
- Operating pressure: 0–6 bar
 - Voltage: 24 V DC
 - Power: 8 W
 - Switching frequency: Approx. 500/min
 - Protective system: IP 67
 - Ambient temperature: +10 °C /+50 °C
 - Cable length: 1,000 mm
 - Material of gasket: EPDM

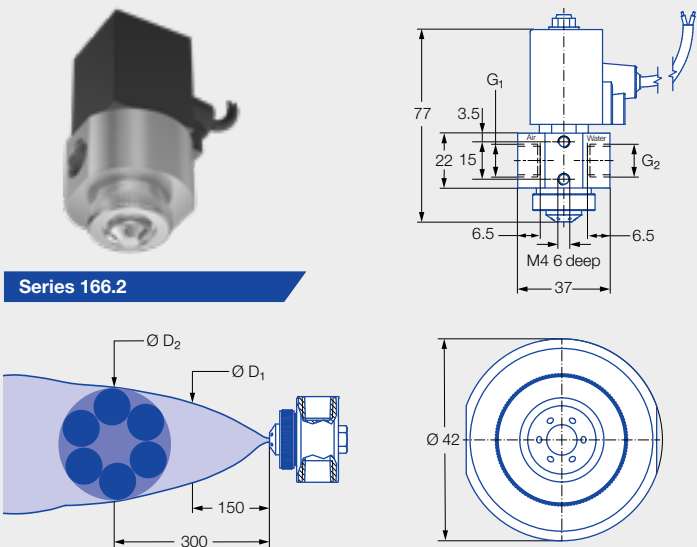

Air connection G ₁	Water connection G ₂	Weight [g]
1/4 BSPP	1/4 BSPP	410

Spray angle	Ordering no.		Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.																	
		16																	
		Stainless steel 303																	
0.7		1.5			3.0			4.0											
p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	p water [bar]	Ø D ₁ [mm]	Ø D ₂ [mm]	
60°	166.215.xx.A2	●	0.5	1.0	3.0	1.3	1.6	5.8	1.7	2.8	8.5	2.4	3.8	9.4	3.1	1.0	0.7	200	330
				1.2	1.8	1.5	1.8	4.9	1.9	3.2	7.2	2.8	4.2	8.2	3.5	1.6	1.5	230	380
				1.4	0.7	1.8	2.0	3.8	2.1	3.6	5.7	3.2	4.6	6.9	3.9	2.4	2.0	230	385
				–	–	–	2.2	2.8	2.3	4.0	4.0	3.6	5.0	5.4	4.2	3.2	3.0	245	390
				–	–	–	2.4	1.7	2.5	4.4	2.2	4.1	5.4	3.8	4.7	4.2	4.0	250	410
				–	–	–	2.6	0.8	2.8	4.8	0.8	4.5	5.8	2.3	5.2	–	–	–	–
				–	–	–	–	–	–	5.0	0.4	4.6	6.0	1.4	5.6	–	–	–	–
				0.8	17.5	2.8	1.6	25.9	4.0	3.0	40.4	5.8	3.8	54.9	6.4	0.8	0.7	250	450
	166.222.xx.A2	●	1.0	1.0	6.0	4.3	1.8	14.7	5.3	3.2	31.5	6.9	4.0	45.6	7.3	1.6	1.5	245	465
				–	–	–	2.0	6.7	6.7	3.4	22.2	8.2	4.2	37.6	8.5	2.3	2.0	245	465
				–	–	–	2.2	1.9	8.1	3.6	14.6	9.5	4.4	29.6	9.7	3.2	3.0	250	465
				–	–	–	–	–	–	3.8	8.5	11.0	4.6	21.6	11.2	4.2	4.0	245	465
				–	–	–	–	–	–	4.0	4.5	12.3	4.8	15.3	12.4	–	–	–	–
				–	–	–	–	–	–	–	–	–	5.0	9.7	13.8	–	–	–	–
				–	–	–	–	–	–	–	–	–	5.2	6.0	15.2	–	–	–	–
				–	–	–	–	–	–	–	–	–	5.4	2.9	16.5	–	–	–	–
	166.231.xx.A2	●	1.4	1.6	25.6	5.1	2.6	44.2	7.0	3.6	93.7	7.9	4.2	132.9	7.3	2.0	0.7	235	380
				2.0	17.8	6.2	3.0	33.0	8.2	4.0	78.3	9.3	4.6	117.2	9.0	2.6	1.5	245	415
				2.4	11.3	7.2	3.4	24.7	9.2	4.4	65.8	10.6	5.0	101.1	10.4	2.4	2.0	255	420
				2.8	6.9	8.1	3.8	18.1	10.2	4.8	54.9	11.9	5.4	87.9	11.8	3.6	3.0	255	425
				–	–	–	4.2	13.2	11.2	5.2	45.6	13.0	5.8	76.6	13.2	4.2	4.0	265	430
				–	–	–	4.6	9.3	12.0	5.6	38.0	14.1	6.0	71.2	13.8	–	–	–	–
				–	–	–	–	–	–	6.0	36.1	14.4	–	–	–	–	–	–	–
				–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–

Ordering Type + Material no. = Ordering no.
 example: 166.215.xx.A2 + 16 = 166.215.16.A2



>>
 Pneumatic atomizing nozzles, flat fan, pressure principle, internal mixing

 Series 166.4

Features:


- Version with magnetic valve
- Fine flat fan atomization
- Liquid pressure principle
- Internal mixing

Applications:

- Belt humidification
- Cooling
- Humidification of goods

Technical data:

- Operating pressure: 0–6 bar
- Voltage: 24 V DC
- Power: 8 W
- Switching frequency: Approx. 500/min
- Protective system: IP 67
- Ambient temperature: +10 °C /+50 °C
- Cable length: 1,000 mm
- Material of gasket: EPDM

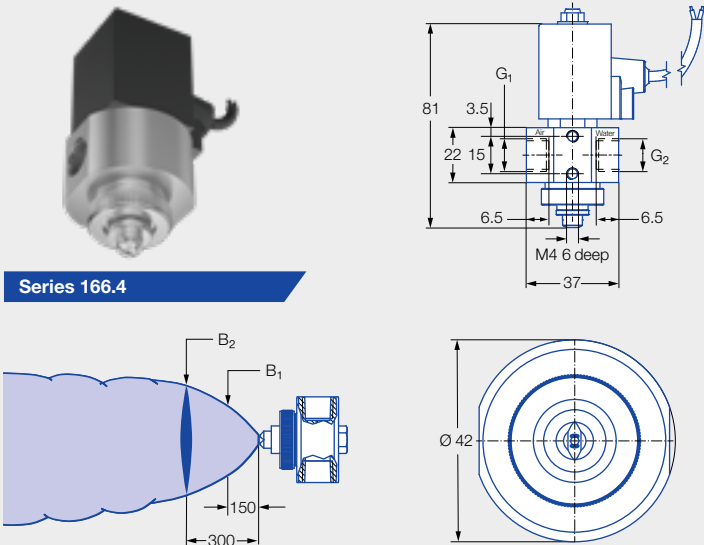

Air connection G ₁	Water connection G ₂	Weight [g]
1/4 BSPP	1/4 BSPP	410

Spray angle	Ordering no.		Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.																	
		16																	
		Stainless steel 303																	
				0.7			1.5			3.0			4.0						
				p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	p water [bar]	B ₁ [mm]	B ₂ [mm]
45°	166.414.xx.A2	●	0.7	1.0	7.7	1.3	1.4	14.3	1.5	2.2	22.4	2.0	3.0	25.1	2.5	1.4	0.7	85	125
				1.2	6.0	1.5	1.6	13.0	1.6	2.6	20.0	2.3	3.4	23.0	2.8	2.4	1.5	100	145
				1.4	4.2	1.7	1.8	11.6	1.8	3.0	17.7	2.6	3.8	20.9	3.1	3.2	2.0	105	155
				1.6	2.7	1.9	2.0	10.2	2.0	3.4	15.5	3.0	4.2	18.9	3.5	3.8	3.0	120	170
				1.8	1.3	2.1	2.2	8.9	2.2	3.8	13.3	3.4	4.6	16.9	3.8	4.6	4.0	130	210
				-	-	-	2.4	7.4	2.4	4.2	11.0	3.7	5.0	14.9	4.2	-	-	-	-
				-	-	-	2.6	5.9	2.6	4.6	8.8	4.1	5.4	12.8	4.6	-	-	-	-
				-	-	-	2.8	4.6	2.8	5.0	6.6	4.5	5.8	10.8	5.0	-	-	-	-
				-	-	-	3.0	3.2	3.0	5.4	4.3	4.9	6.0	9.8	5.2	-	-	-	-
				-	-	-	3.2	2.1	3.2	5.8	2.5	5.3	-	-	-	-	-	-	-
				-	-	-	3.4	1.1	3.4	6.0	1.6	5.5	-	-	-	-	-	-	-
	166.462.xx.A2	●	1.5	1.2	19.0	2.6	2.0	22.0	2.0	3.0	61.8	4.0	3.8	76.1	4.6	1.2	0.7	120	140
				1.6	12.2	3.4	2.4	18.0	2.4	3.4	51.9	4.8	4.0	70.4	5.1	2.4	1.5	120	170
				2.0	9.4	4.1	2.8	14.4	2.8	3.8	44.6	5.8	4.2	65.6	5.5	3.2	2.0	120	175
				2.4	7.1	4.8	3.2	11.3	3.2	4.2	39.0	6.6	4.4	61.3	5.9	3.8	3.0	140	205
				2.8	5.7	5.4	3.6	8.8	3.6	4.6	33.4	7.4	4.6	57.3	6.4	6.0	4.0	145	205
				3.2	5.0	6.0	4.0	8.1	3.9	5.0	29.4	8.1	4.8	54.1	6.7	-	-	-	-
				3.6	3.6	6.6	4.4	6.2	4.3	5.4	25.5	8.9	5.0	51.3	7.2	-	-	-	-
				4.0	3.2	7.2	4.8	4.6	4.6	5.8	22.0	9.6	5.2	49.3	7.7	-	-	-	-
				4.4	2.2	7.8	5.2	3.2	4.9	6.0	20.6	9.9	5.4	46.5	8.2	-	-	-	-
				-	-	-	5.6	1.6	5.3	-	-	-	5.6	43.7	8.6	-	-	-	-
				-	-	-	5.8	0.8	5.4	-	-	-	5.8	41.3	8.9	-	-	-	-
				-	-	-	-	-	-	-	-	-	6.0	39.0	9.3	-	-	-	-





Spray angle	Ordering no.		Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.																	
		16																	
		Stainless steel 303																	
			0.7			1.5			3.0			4.0							
p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	p water [bar]	B ₁ [mm]	B ₂ [mm]	
60°	166.425.xx.A2	●	0.5	0.8	6.5	1.2	1.4	9.4	1.7	2.4	13.2	2.5	2.4	16.1	2.5	1.2	0.7	155	195
				1.2	5.5	1.6	1.8	8.7	2.1	2.6	12.9	2.7	2.8	15.5	2.9	2.2	1.5	165	255
				1.6	4.7	1.9	2.2	7.9	2.4	3.0	12.3	3.0	3.2	15.0	3.2	3.0	2.0	170	265
				2.0	4.0	2.3	2.6	7.2	2.7	3.4	11.8	3.4	3.6	14.5	3.5	3.4	3.0	200	330
				2.4	3.2	2.6	3.0	6.4	3.1	3.8	11.1	3.7	4.0	13.9	3.8	5.6	4.0	200	330
				2.8	2.6	2.9	3.4	5.7	3.4	4.2	10.4	4.0	4.4	13.4	4.1	-	-	-	-
				3.0	2.2	3.1	3.8	5.1	3.7	4.6	9.8	4.3	4.8	12.8	4.5	-	-	-	-
				-	-	-	4.0	4.8	3.9	5.0	9.2	4.6	5.2	12.2	4.8	-	-	-	-
				-	-	-	4.4	4.2	4.2	5.4	8.6	5.0	5.6	11.7	5.1	-	-	-	-
				-	-	-	4.8	3.6	4.5	5.8	8.1	5.3	6.0	11.2	5.4	-	-	-	-
				-	-	-	5.2	2.8	4.8	6.0	7.8	5.4	-	-	-	-	-	-	-
				-	-	-	5.6	2.2	5.1	-	-	-	-	-	-	-	-	-	-
	-	-	-	6.0	1.6	5.5	-	-	-	-	-	-	-	-	-	-	-		
	166.452.xx.A2	●	1.5	1.0	18.8	3.9	1.8	31.0	5.3	3.2	50.1	7.7	3.8	70.7	8.2	1.0	0.7	130	185
				1.4	8.6	5.7	2.0	25.4	6.3	3.6	39.5	9.4	4.2	58.6	9.6	1.8	1.5	150	240
				1.8	7.4	7.0	2.2	20.1	7.2	4.0	31.3	11.2	4.6	48.6	11.2	2.6	2.0	155	245
				2.2	4.1	8.4	2.4	15.5	8.0	4.4	24.0	12.9	5.0	41.2	13.1	3.6	3.0	175	280
				2.6	1.0	9.8	2.6	12.4	8.9	4.8	17.7	14.5	5.4	33.6	14.8	5.0	4.0	180	285
				2.8	0.1	10.3	2.8	10.4	9.6	5.2	13.4	16.0	5.8	27.5	16.4	-	-	-	-
				-	-	-	-	-	-	5.6	10.6	17.5	6.0	24.4	17.2	-	-	-	-
				-	-	-	-	-	-	6.0	8.6	18.8	-	-	-	-	-	-	-
80°	166.433.xx.A2	●	0.4	1.0	11.6	2.0	1.8	18.3	2.8	3.0	31.0	3.7	3.8	37.5	4.4	1.4	0.7	150	210
				1.2	8.1	2.4	2.0	15.3	3.2	3.4	25.4	4.4	4.2	32.4	5.0	2.2	1.5	185	255
				1.4	5.3	2.8	2.2	12.2	3.6	3.8	20.6	5.1	4.6	27.7	5.7	3.0	2.0	205	300
				1.6	3.7	3.2	2.4	9.8	4.0	4.2	16.3	5.9	5.0	23.4	6.5	3.8	4.0	300	485
				-	-	-	2.6	7.6	4.3	4.6	12.5	6.6	5.4	19.4	7.2	5.2	4.0	260	395
				-	-	-	2.8	5.9	4.7	5.0	9.3	7.3	5.8	15.9	7.9	-	-	-	-
				-	-	-	3.0	4.4	5.0	5.4	6.5	8.0	6.0	14.2	8.3	-	-	-	-

Ordering Type

+ Material no.

= Ordering no.

example: 166.425.xx.A2

+ 16

= 166.425.16.A2

» Pneumatic atomizing nozzles, flat fan, pressure principle, external mixing

Series 166.6

Features:


- Version with magnetic valve
- Fine flat fan atomization
- Liquid pressure principle
- External mixing

Applications:

- Belt humidification
- Cooling
- Humidification of goods
- Atomization of viscous liquids

Technical data:

- Operating pressure: 0–6 bar
- Voltage: 24 V DC
- Power: 8 W
- Switching frequency: Approx. 500/min
- Protective system: IP 67
- Ambient temperature: +10 °C /+50 °C
- Cable length: 1,000 mm
- Material of gasket: EPDM

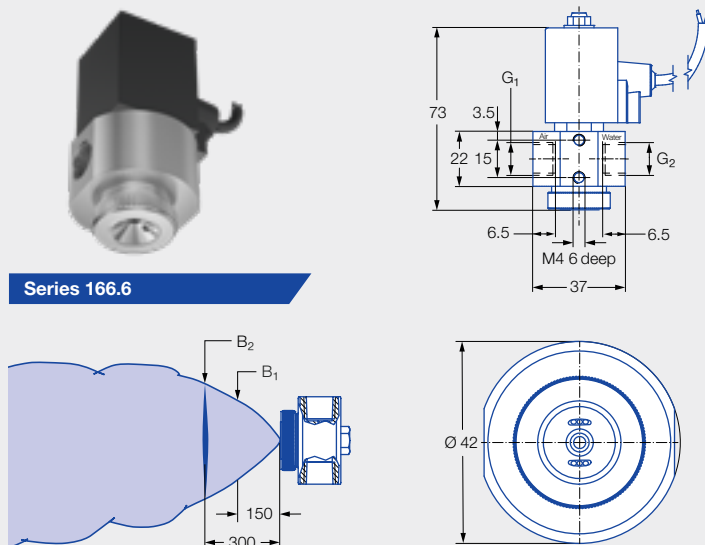

Air connection G ₁	Water connection G ₂	Weight [g]
1/4 BSPP	1/4 BSPP	410

Spray angle	Ordering no.		Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.		0.07				0.15				0.30				0.35			
		16		p air [bar]	V̇ water [l/h]	V̇n air [m³/h]	p air [bar]	V̇ water [l/h]	V̇n air [m³/h]	p air [bar]	V̇ water [l/h]	V̇n air [m³/h]	p air [bar]	V̇ water [l/h]	V̇n air [m³/h]				
																Stainless steel 303	p air [bar]	V̇ water [l/h]	V̇n air [m³/h]
45°	166.616.xx.A2	●	0.40	0.80	1.68	2.50	0.80	2.43	2.40	0.80	3.42	2.50	1.00	3.69	2.80	1.40	0.07	80	115
				1.20	1.80	3.10	1.00	2.46	2.90	1.20	3.48	3.10	1.40	3.81	3.40	2.20	0.15	90	130
				1.60	1.92	3.70	1.40	2.58	3.60	1.60	3.51	3.70	1.80	3.87	4.00	3.20	0.20	90	135
				2.00	2.10	4.30	1.80	2.61	4.20	2.00	3.63	4.30	2.20	3.84	4.60	4.00	0.30	95	145
				2.40	2.07	4.90	2.20	2.76	4.80	2.40	3.63	4.90	2.60	3.90	5.20	5.00	0.35	100	145
				2.80	2.19	5.50	2.60	2.73	5.40	2.80	3.63	5.50	3.00	3.93	5.80	–	–	–	–
				3.20	2.19	6.10	3.00	2.73	6.00	3.20	3.63	6.10	3.40	3.90	6.40	–	–	–	–
				3.60	2.22	6.70	3.60	2.76	6.70	3.60	3.66	6.70	3.80	3.93	7.00	–	–	–	–
				4.00	2.22	7.30	4.00	2.76	7.30	4.00	3.69	7.30	4.20	3.96	7.60	–	–	–	–
				4.40	2.22	7.90	4.40	2.76	7.90	4.40	3.69	7.90	4.60	3.93	8.20	–	–	–	–
				4.80	2.22	8.50	4.80	2.76	8.50	4.80	3.69	8.40	5.00	3.93	8.80	–	–	–	–
				5.20	2.22	9.10	5.20	2.76	9.10	5.20	3.66	9.10	5.40	3.93	9.40	–	–	–	–
				5.60	2.22	9.60	5.60	2.76	9.70	5.60	3.66	9.60	5.80	3.87	10.00	–	–	–	–
				6.00	2.22	10.20	6.00	2.73	10.20	6.00	3.66	10.20	6.00	3.87	10.20	–	–	–	–
	166.654.xx.A2	●	0.70	0.80	5.25	2.40	0.80	7.29	2.40	1.20	10.11	3.10	1.60	11.07	3.70	1.40	0.07	95	135
				1.20	5.64	3.10	1.20	7.44	3.10	1.60	10.23	3.70	2.00	11.22	4.30	2.20	0.15	100	150
				1.60	5.79	3.70	1.60	7.62	3.70	2.00	10.38	4.30	2.40	11.28	4.90	3.20	0.20	105	160
				2.00	6.18	4.30	2.00	7.86	4.30	2.40	10.47	4.90	2.80	11.31	5.50	4.00	0.30	105	160
				2.40	6.24	4.90	2.40	7.92	4.90	2.80	10.59	5.50	3.20	11.43	6.10	5.00	0.35	105	160
				2.80	6.27	5.50	2.80	8.04	5.50	3.20	10.59	6.10	3.60	11.46	6.60	–	–	–	–
				3.20	6.39	6.10	3.20	8.13	6.10	3.60	10.62	6.70	4.00	11.43	7.20	–	–	–	–
				3.60	6.42	6.60	3.60	8.13	6.70	4.00	10.62	7.20	4.40	11.37	7.80	–	–	–	–
				4.00	6.45	7.20	4.00	8.13	7.20	4.40	10.62	7.80	4.80	11.37	8.40	–	–	–	–
				4.40	6.42	7.80	4.40	8.07	7.80	4.80	10.59	8.40	5.20	11.34	9.00	–	–	–	–
				4.80	6.30	8.40	4.80	8.04	8.40	5.20	10.56	9.00	5.60	11.22	9.60	–	–	–	–
				5.20	6.24	9.00	5.20	7.86	9.00	5.60	10.50	9.60	6.00	11.16	10.10	–	–	–	–
				5.60	6.09	9.60	5.60	7.83	9.60	6.00	10.35	10.20	–	–	–	–	–	–	–
				6.00	5.85	10.20	6.00	7.59	10.20	–	–	–	–	–	–	–	–	–	–



Spray angle	Ordering no.		Narrowest free cross section Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.																	
		16		0.07			0.15			0.30			0.35						
		Stainless steel 303		p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	V water [l/h]	V _n air [m³/h]	p air [bar]	p water [bar]	B ₁ [mm]	B ₂ [mm]
60°	166.626.xx.A2	●	0.40	0.80	1.83	2.80	0.80	2.49	2.80	0.80	3.48	2.80	0.80	3.78	2.80	1.60	0.07	85	135
				1.20	1.98	3.60	1.20	2.58	3.50	1.20	3.60	3.50	1.20	3.87	3.60	2.40	0.15	90	140
				1.60	2.10	4.30	1.60	2.70	4.20	1.60	3.66	4.30	1.60	3.90	4.20	3.20	0.20	90	140
				2.00	2.16	4.90	2.00	2.82	4.90	2.00	3.69	4.90	2.00	3.96	4.90	4.00	0.30	100	145
				2.40	2.25	5.60	2.40	2.85	5.60	2.40	3.69	5.60	2.40	3.96	5.60	5.20	0.35	105	150
				2.80	2.34	6.30	2.80	2.88	6.30	2.80	3.72	6.30	2.80	4.02	6.30	-	-	-	-
				3.20	2.31	7.00	3.20	2.88	7.00	3.20	3.78	7.00	3.20	3.99	7.00	-	-	-	-
				3.60	2.34	7.60	3.60	2.88	7.70	3.60	3.78	7.60	3.60	4.02	7.70	-	-	-	-
				4.00	2.40	8.40	4.00	2.94	8.40	4.00	3.81	8.30	4.00	4.05	8.30	-	-	-	-
				4.40	2.40	9.00	4.40	2.91	9.00	4.40	3.81	9.00	4.40	4.02	9.00	-	-	-	-
				4.80	2.40	9.70	4.80	2.97	9.70	4.80	3.81	9.70	4.80	4.08	9.70	-	-	-	-
				5.20	2.43	10.40	5.20	2.97	10.40	5.20	3.81	10.40	5.20	4.05	10.40	-	-	-	-
				5.60	2.43	11.20	5.60	2.97	11.10	5.60	3.81	11.10	5.60	4.05	11.00	-	-	-	-
				6.00	2.43	11.80	6.00	2.97	11.80	6.00	3.81	11.80	6.00	4.05	11.80	-	-	-	-
	166.682xx.A2	●	1.50	1.00	22.41	7.50	1.40	28.95	9.30	1.80	41.22	11.10	2.00	44.04	11.80	1.60	0.07	110	155
				1.40	20.19	9.30	1.80	26.07	10.90	2.20	34.92	12.60	2.40	39.09	13.40	2.40	0.15	120	155
				1.80	18.75	11.00	2.20	23.94	12.50	2.60	33.18	14.20	2.80	35.16	15.10	3.20	0.20	120	160
				2.20	17.88	12.50	2.60	22.23	14.30	3.00	30.45	15.90	3.20	32.22	16.70	4.00	0.30	120	165
				2.60	17.10	14.20	3.00	21.12	15.90	3.40	28.29	17.50	3.60	30.18	18.30	5.20	0.35	120	175
				3.00	16.47	15.90	3.40	20.10	17.50	3.80	26.64	19.10	4.00	28.32	19.90	-	-	-	-
				3.40	16.08	17.50	3.80	19.44	19.10	4.20	25.35	20.70	4.40	26.94	21.50	-	-	-	-
				3.80	15.90	19.10	4.20	18.99	20.70	4.60	24.24	22.30	4.80	25.59	23.10	-	-	-	-
				4.20	15.90	20.70	4.60	18.45	22.30	5.00	23.13	24.00	5.20	24.36	24.80	-	-	-	-
				4.60	15.81	22.30	5.00	18.18	24.00	5.40	22.14	25.50	5.60	23.28	26.40	-	-	-	-
				5.00	15.21	23.90	5.40	17.25	25.40	5.80	21.12	27.20	6.00	22.17	28.00	-	-	-	-
				5.40	13.92	25.50	5.80	15.72	27.20	6.00	20.67	28.00	-	-	-	-	-	-	-
				5.80	12.09	27.20	6.00	14.91	28.00	-	-	-	-	-	-	-	-	-	-
				6.00	11.07	28.00	-	-	-	-	-	-	-	-	-	-	-	-	-
	166.691.xx.A2	●	2.50	1.40	52.00	13.80	2.00	67.30	17.50	2.60	92.30	21.20	2.60	102.10	21.20	1.60	0.07	150	200
				1.80	50.00	16.30	2.40	64.60	20.10	3.00	87.70	23.60	3.00	97.20	23.70	2.40	0.15	160	205
				2.20	48.60	18.80	2.80	62.00	22.50	3.40	84.30	26.00	3.40	92.50	26.10	3.20	0.20	160	205
				2.60	47.50	21.30	3.20	60.40	24.90	3.80	80.70	28.50	3.80	88.40	28.50	4.00	0.30	160	210
				3.00	46.50	23.70	3.60	58.00	27.30	4.20	77.00	30.90	4.20	85.20	31.00	5.20	0.35	150	210
				3.40	45.40	26.10	4.00	56.20	29.80	4.60	74.40	33.40	4.60	81.30	33.40	-	-	-	-
				3.80	44.40	28.60	4.40	54.20	32.10	5.00	71.10	35.90	5.00	78.20	35.80	-	-	-	-
				4.20	42.90	31.00	4.80	52.40	34.70	5.40	68.10	38.30	5.40	74.30	38.20	-	-	-	-
				4.60	41.50	33.40	5.20	49.90	37.10	5.80	64.30	40.80	5.80	71.10	40.70	-	-	-	-
				5.00	39.90	35.80	5.60	48.10	39.50	6.00	63.20	42.00	6.00	68.90	41.90	-	-	-	-
				5.40	38.90	38.30	6.00	46.40	42.00	-	-	-	-	-	-	-	-	-	-
				5.60	38.50	39.40	-	-	-	-	-	-	-	-	-	-	-	-	-

Ordering Type

+ Material no.

= Ordering no.

example: 166.626.xx.A2


+ 16

= 166.626.16.A2

Accessories for pneumatic atomizing nozzles

Series 136.1 to 136.6


Overview of accessories

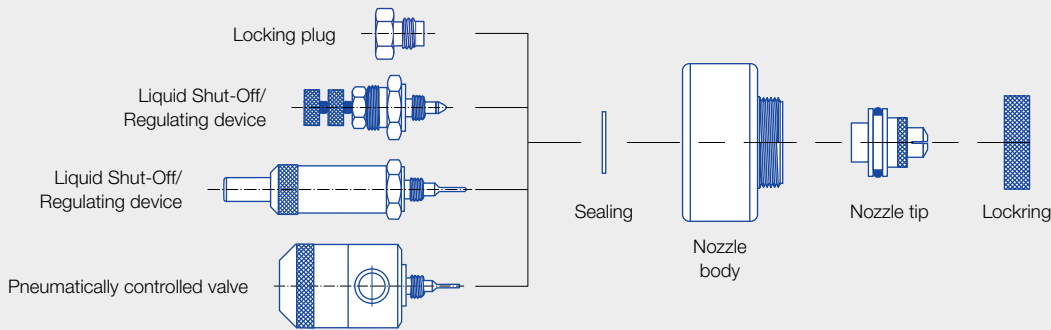

Regulating device and shut-off needle

Enables manual regulation of the flow rate and closing of the nozzle.

Material: Stainless steel 303
Weight: 33 g



Ordering no.

Type



013.600.16

Suitable for
all nozzles of
series 136

Regulating device with quick-cleaning needle

Enables manual regulation of the flow rate and cleaning of the nozzle orifice.

Material: Stainless steel 303
Weight: 75 g

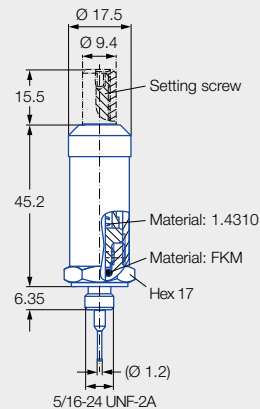

Ordering no.

Type

For nozzles

Needle diameter
D
[mm]

013.601.16.30

136.xx1

2.1

013.602.16.30

136.xx2

1.2

013.603.16.30

136.xx3

0.8

013.604.16.30

136.xx4

0.6

013.605.16.30

136.xx5

0.4

013.606.16.30

136.xx6

0.3






Pneumatically controlled valve. Opening pressure 2.1 bar, max. 180 cycles/min.

External control system via separate compressed air connection for switching the nozzle on and off.

Material: Stainless steel 303
Weight: 230 g



Ordering no.		
Type	For nozzles	Needle diameter D [mm]
013.601.16.10	136.xx1	2.1
013.602.16.10	136.xx2	1.2
013.603.16.10	136.xx3	0.8
013.604.16.10	136.xx4	0.6
013.605.16.10	136.xx5	0.4
013.606.16.10	136.xx6	0.3



➤ Pneumatic atomizing nozzles, full cone, siphon principle, internal mixing Series 140


Features:

- Particularly fine full cone atomization
- Siphon principle
- Internal mixing
- Integrated regulating device
- Material: Brass

Applications:

- Lubrication
- Cooling
- Humidification of air


Series 140

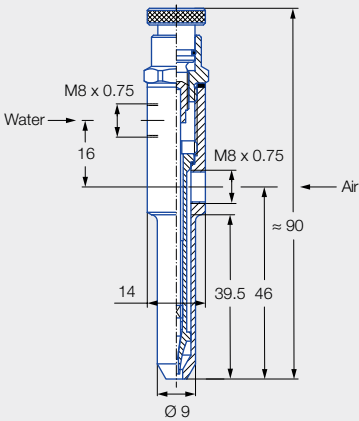

Mat. no.	Weight [g]
30	70

Spray angle	Ordering no. Type	Narrowest free cross section Ø [mm]		Hs Aspiration height [mm WS]	Flow rate ṽ W = water ṽ n L = air p [bar] air pressure							
					0.5		1.0		2.0		3.0	
		Water	Air		ṽ W [l/h]	ṽ n L [m³/h]	ṽ W [l/h]	ṽ n L [m³/h]	ṽ W [l/h]	ṽ n L [m³/h]	ṽ W [l/h]	ṽ n L [m³/h]
20°–30°	140.252.30.01	0.50	0.75	500	–	–	4.50	4.00	8.00	6.00	10.50	8.00
		0.50	0.75	200	4.50	2.50	7.00	4.00	10.00	6.00	12.00	8.00

Assembly scheme/Accessories

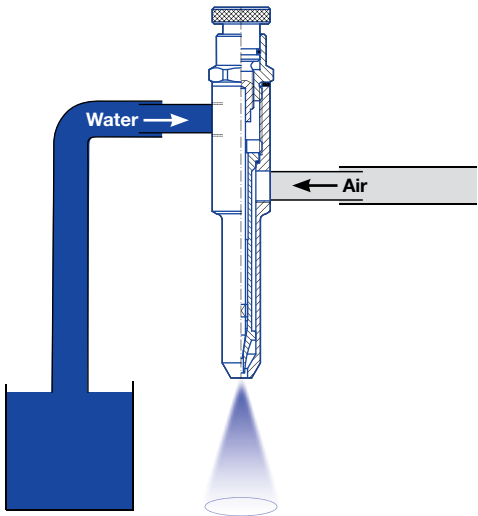


Accessories:

- Gasket
014.040.72
7.8 x 12 x 1 (EWP 210)



- Nipple
014.010.30.04
(Material: Brass)
Weight: 17 g






Pneumatic atomizing nozzles for atomizing viscous media Series 176 ViscoMist

The ViscoMist series enables the independent regulation of both atomizing air and fan air. Spray angle and droplet size can thus be individually adjusted.

The integrated, pneumatically controlled shut-off/clean-out needle opens and closes the liquid orifice and also cleans it during each closing procedure. This is of particular advantage when spraying viscous liquids. Thanks to their modular design, the nozzles of the ViscoMist series can be optimally adapted to the respective spraying process. To do this, it is simply enough to replace the nozzle components relevant for the flow rate and spray pattern. The housing stays the same.



Series 176 ViscoMist



External mixing nozzle for viscous liquids, e.g. for:

- Coating processes
- Moisturising
- Lubrication
- Glazing
- Disinfection

One nozzle – several spray characters:

- Spray characters
 - Solid stream
 - Full cone
 - Flat fan
- Independent regulation of liquid, atomizing air and fan air
- Fluid circulation possible (nozzle body with five connections)

Nozzle sizes:

- Ø 0.38 mm to 2.54 mm

Valve position:

- Normally closed, fail-safe with loss of air

Signal air pressure:

- Min. 2 bar, max. 3 bar

Cycles per minute:

- 180 cycles/min (short term)

Connection thread:

- 1/8 BSPP
- NPT thread available on request

Weight:

- 550 g

Material:

- 1Y (stainless steel 316L)

Flow rate range:


- Water: 7.8 to 307.0 l/h, at 2 bar
- Air 7.5 to 28.4 m³/h in normal condition, at 2 bar

Atomizing air/Signal air/Fan air:

- The atomizing air causes the liquid to atomize at the nozzle orifice. The fan air allows the spray characteristics to be adapted to the application. The nozzle is activated by the signal air.


Nozzle body configurations

Nozzle body configuration 2




Version with three connections

Nozzle body configuration 4



Version with four connections

Nozzle body configuration 5

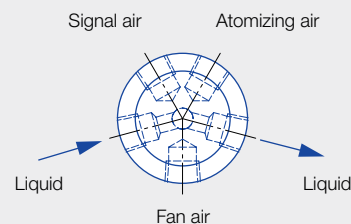

Version with five connections

Ordering no.	Narrowest free cross section Ø [mm]	Liquid		Air			Spray dimensions [mm] at distance D ₁ , D ₂ and D ₃															
							Atomizing air [bar]	Liquid pressure p [bar]	Fan air [bar]													
		0.00*			0.35				0.70			1.00			1.50							
		Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm			Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm				
Type	Liquid pressure p [bar]	V water [l/h]	Air pressure p air [bar]	Atomizing air [m³/h]	Fan air [m³/h]	Atomizing air [bar]	Liquid pressure p [bar]	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm			
176.201.1Y.11.00 176.401.1Y.11.00 176.501.1Y.11.00	0.38	0.15	1.89	0.15	0.75	1.00	0.30	0.35	40	60	100	150	180	200	180	230	290	180	230	280		
		0.30	2.80	0.30	1.09	1.44		0.70	40	50	80	150	200	280	200	270	330	230	280	330		
		0.70	4.39	0.70	1.63	2.28		1.00	-	-	-	170	200	280	200	300	380	230	300	380		
		1.00	5.49	1.00	2.02	2.89		1.50	-	-	-	170	200	360	200	250	340	250	300	360		
		1.35	6.40	1.35	2.38	3.45	1.00	0.35	40	60	100	100	130	170	130	180	230	150	230	280		
		1.70	7.19	1.70	2.77	3.99		0.70	40	60	100	80	110	180	130	180	230	150	200	230		
		2.00	7.91	2.00	3.11	4.55		1.00	30	40	80	80	130	180	130	180	250	150	230	280		
		2.40	8.63	2.40	3.48	5.11		1.50	-	-	-	100	150	200	150	190	250	180	250	360		
		2.75	9.24	2.75	3.87	5.67	2.00	0.35	40	60	100	50	80	110	90	130	150	100	150	190		
		3.15	9.80	3.15	4.23	6.24		0.70	40	60	90	60	90	140	80	100	140	110	180	230		
		3.50	10.33	3.50	4.60	6.78		1.00	40	60	90	70	90	140	100	130	190	130	200	250		
		4.00	11.17	4.00	5.22	7.70		1.50	-	-	-	60	80	130	110	140	180	140	190	230		
		176.202.1Y.11.00 176.402.1Y.11.00 176.502.1Y.11.00	0.58	0.15	4.05	0.15	0.78	1.00	0.30	0.35	40	60	100	140	190	270	220	250	300	190	240	280
				0.30	5.90	0.30	1.10	1.44		0.70	-	-	-	180	240	250	230	300	360	280	330	410
				0.70	9.27	0.70	1.67	2.28		1.00	-	-	-	150	200	230	250	290	430	300	340	460
				1.00	11.47	1.00	2.06	2.89		1.50	-	-	-	-	-	-	250	290	360	280	340	430
1.35	13.32			1.35	2.43	3.45	1.00	0.35	40	50	90	110	140	150	130	170	230	150	180	230		
1.70	14.99			1.70	2.79	3.99		0.70	40	60	90	110	130	190	140	180	240	170	220	250		
2.00	16.43			2.00	3.14	4.55		1.00	-	-	-	100	140	200	170	200	280	190	230	330		
2.40	17.90			2.40	3.52	5.11		1.50	-	-	-	-	-	-	170	200	300	200	250	360		
2.75	19.23			2.75	3.91	5.67	2.00	0.35	40	50	80	60	80	110	90	130	170	110	150	180		
3.15	20.44			3.15	4.28	6.24		0.70	40	40	80	70	100	130	110	140	170	140	180	190		
3.50	21.57			3.50	4.66	6.78		1.00	30	50	90	70	100	130	100	150	180	130	180	230		
4.00	23.32			4.00	5.22	7.70		1.50	-	-	-	70	100	150	110	150	230	130	180	240		
176.203.1Y.11.00 176.403.1Y.11.00 176.503.1Y.11.00	0.79			0.15	8.36	0.15	0.48	1.00	0.30	0.35	-	-	-	230	300	410	330	410	480	330	410	510
				0.30	12.38	0.30	0.71	1.44		0.70	-	-	-	230	280	330	300	360	510	410	480	610
				0.70	19.19	0.70	1.16	2.28		1.00	-	-	-	-	-	-	330	410	530	410	460	640
				1.00	23.77	1.00	1.46	2.89		1.50	-	-	-	-	-	-	280	360	460	380	460	610
		1.35	27.59	1.35	1.65	3.45	1.00	0.35	40	60	100	150	200	270	170	230	280	230	300	380		
		1.70	31.04	1.70	1.89	3.99		0.70	-	-	-	150	200	250	230	300	380	300	360	460		
								1.00	-	-	-	-	-	-	230	280	410	300	380	510		
								1.50	-	-	-	-	-	-	230	280	380	280	380	510		

* A cone-shaped spray pattern is produced without fan air.





Ordering no.	Narrowest free cross section Ø [mm]	Liquid		Air			Spray dimensions [mm] at distance D ₁ , D ₂ and D ₃																	
							Atomizing air [bar]	Liquid pressure p [bar]	Fan air [bar]															
		0.00*			0.35				0.70			1.00			1.50									
		Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm			Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm						
Type	Liquid pressure p [bar]	V water [l/h]	Air pressure p air [bar]	Atomizing air [m³/h]	Fan air [m³/h]	Atomizing air [bar]	Liquid pressure p [bar]	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm		
176.203.1Y.11.00 176.403.1Y.11.00 176.503.1Y.11.00	0.79	2.00	33.99	2.00	2.14	4.55	2.00	0.35	30	60	80	100	140	180	150	200	240	190	230	300	200	230	280	
		2.40	36.75	2.40	2.40	5.11		0.70	-	-	-	130	150	200	170	230	330	230	300	380	250	300	360	
		2.75	39.44	2.75	2.65	5.67		1.00	-	-	-	130	180	200	180	230	330	230	300	410	250	320	410	
		3.15	41.98	3.15	2.94	6.24		1.50	-	-	-	-	-	-	180	230	330	240	300	430	250	330	430	
		3.50	44.32	3.50	3.16	6.78	2.75	0.35	40	60	90	100	130	180	140	180	230	170	200	280	190	230	300	
		4.00	47.92	4.00	3.65	7.70		0.70	-	-	-	110	150	200	150	200	250	180	230	300	230	280	380	
								1.00	-	-	-	-	-	-	180	230	300	200	250	360	230	280	380	
						1.50	-	-	-	-	-	-	180	230	330	230	280	380	230	290	410			
176.204.1Y.11.00 176.404.1Y.11.00 176.504.1Y.11.00	1.07	0.15	16.88	0.15	2.34	2.04	0.30	0.35	-	-	-	150	200	300	300	410	460	330	410	560	300	410	510	
		0.30	24.38	0.30	3.47	2.94		0.70	-	-	-	-	-	-	300	380	1,040	360	430	530	410	480	640	
		0.70	37.28	0.70	5.59	4.60		1.00	-	-	-	-	-	-	250	380	510	360	460	580	410	510	690	
		1.00	45.80	1.00	7.32	5.81		1.50	-	-	-	-	-	-	250	380	480	330	380	530	410	510	660	
		1.35	52.91	1.35	8.83	6.90	1.00	0.35	40	60	80	110	140	190	150	200	250	200	250	330	250	300	430	
		1.70	59.20	1.70	10.19	7.99		0.70	-	-	-	100	140	230	170	200	270	220	270	380	250	330	430	
		2.00	64.99	2.00	11.55	9.06		1.00	-	-	-	100	130	180	150	190	300	220	250	380	250	300	480	
		2.40	70.55	2.40	12.91	10.13		1.50	-	-	-	-	-	-	150	200	280	200	250	410	240	300	460	
		2.75	75.51	2.75	14.31	11.21	2.00	0.35	40	60	90	80	100	140	100	130	180	110	170	230	150	190	280	
		3.15	80.28	3.15	15.63	12.27		0.70	-	-	-	80	100	150	100	130	200	130	170	230	150	200	280	
		3.50	84.90	3.50	17.11	13.32		1.00	-	-	-	70	100	150	100	140	200	130	180	250	150	200	280	
		4.00	91.56	4.00	19.49	15.12		1.50	-	-	-	70	100	150	110	140	230	130	170	250	150	200	300	
		0.15	24.60	0.15	2.17	2.04	0.30	0.35	-	-	-	230	330	460	360	460	530	410	530	640	460	530	660	
		0.30	35.35	0.30	3.23	2.94		0.70	-	-	-	-	-	-	330	460	580	410	510	660	410	480	610	
		0.70	54.31	0.70	5.16	4.60		1.00	-	-	-	-	-	-	330	410	480	360	460	560	430	560	740	
		1.00	66.62	1.00	6.75	5.81		1.50	-	-	-	-	-	-	-	-	-	380	510	660	460	580	810	
1.35	76.46	1.35	8.00	6.90	1.00	0.35	-	-	-	130	170	230	180	230	380	230	290	430	190	360	510			
1.70	86.18	1.70	9.17	7.99		0.70	-	-	-	110	170	230	180	230	330	220	290	410	190	360	510			
2.00	94.81	2.00	10.35	9.06		1.00	-	-	-	-	-	-	190	240	360	230	300	430	270	340	480			
2.40	102.95	2.40	11.55	10.13		1.50	-	-	-	-	-	-	170	220	300	220	300	410	250	330	480			
2.75	110.48	2.75	12.78	11.21	2.00	0.35	40	60	90	80	100	150	110	140	200	140	180	250	170	220	330			
3.15	117.52	3.15	14.00	12.27		0.70	-	-	-	70	100	150	110	150	230	130	180	280	170	230	360			
3.50	124.15	3.50	15.10	13.32		1.00	-	-	-	80	100	150	110	140	220	140	190	280	170	230	360			
4.00	134.14	4.00	17.23	15.12		1.50	-	-	-	70	100	150	110	150	200	140	190	300	170	230	360			
176.205.1Y.11.00 176.405.1Y.11.00 176.505.1Y.11.00	1.32	0.15	24.60	0.15	2.17	2.04	0.30	0.35	-	-	-	230	330	460	360	460	530	410	530	640	460	530	660	
		0.30	35.35	0.30	3.23	2.94		0.70	-	-	-	-	-	-	330	460	580	410	510	660	410	480	610	
		0.70	54.31	0.70	5.16	4.60		1.00	-	-	-	-	-	-	330	410	480	360	460	560	430	560	740	
		1.00	66.62	1.00	6.75	5.81		1.50	-	-	-	-	-	-	-	-	-	380	510	660	460	580	810	
		1.35	76.46	1.35	8.00	6.90	1.00	0.35	-	-	-	130	170	230	180	230	380	230	290	430	190	360	510	
		1.70	86.18	1.70	9.17	7.99		0.70	-	-	-	110	170	230	180	230	330	220	290	410	190	360	510	
		2.00	94.81	2.00	10.35	9.06		1.00	-	-	-	-	-	-	190	240	360	230	300	430	270	340	480	
		2.40	102.95	2.40	11.55	10.13		1.50	-	-	-	-	-	-	170	220	300	220	300	410	250	330	480	
2.75	110.48	2.75	12.78	11.21	2.00	0.35	40	60	90	80	100	150	110	140	200	140	180	250	170	220	330			
3.15	117.52	3.15	14.00	12.27		0.70	-	-	-	70	100	150	110	150	230	130	180	280	170	230	360			
3.50	124.15	3.50	15.10	13.32		1.00	-	-	-	80	90	130	100	130	200	120	170	240	150	200	300			
4.00	134.14	4.00	17.23	15.12		1.50	-	-	-	60	90	150	100	130	200	110	180	250	150	200	300			

Ordering no.	Narrow- est free cross section Ø [mm]	Liquid		Air			Spray dimensions [mm] at distance D ₁ , D ₂ and D ₃																
Type		Liquid pressure p [bar]	V̇ water [l/h]	Air pressure p air [bar]	Atomizing air [m³/h]	Fan air [m³/h]	Atomizing air [bar]	Liquid pressure p [bar]	Fan air [bar]														
									0.70			1.00			1.40			1.75			2.00		
									Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm
176.206.1Y.11.00 176.406.1Y.11.00 176.506.1Y.11.00	1,70	0.15	41.71	0.15	1.53	2.04	1.00	0.35	220	330	510	280	410	610	360	460	660	-	-	-	-	-	-
		0.30	59.54	0.30	2.24	2.94		0.70	240	360	530	330	430	660	360	510	760	-	-	-	-	-	-
		0.70	90.88	0.70	3.47	4.60		1.00	250	360	510	300	430	610	360	510	690	-	-	-	-	-	-
								1.50	-	-	-	300	380	560	330	460	610	-	-	-	-	-	-
		1.00	111.73	1.00	4.35	5.81	2.00	0.35	150	230	330	200	280	410	230	300	460	230	330	460	250	330	430
		1.35	128.99	1.35	5.15	6.90		0.70	180	230	300	200	250	380	230	300	460	250	360	480	280	360	510
		1.70	144.21	1.70	5.95	7.99		1.00	150	230	330	180	250	380	230	300	430	250	330	480	280	360	530
								1.50	-	-	-	180	250	360	230	280	430	250	330	510	280	360	510
		2.00	157.91	2.00	6.71	9.06	2.75	0.35	140	180	280	180	230	300	180	250	360	200	280	410	200	280	430
		2.40	170.48	2.40	7.53	10.13		0.70	150	200	300	180	230	330	180	250	380	200	280	410	230	300	410
		2.75	182.25	2.75	8.27	11.21		1.00	140	180	280	180	230	330	190	230	380	200	280	410	230	300	430
								1.50	130	180	250	150	200	330	180	250	380	200	280	430	230	330	480
		3.15	193.26	3.15	9.07	12.27	4.00	0.35	130	180	250	150	200	300	170	230	330	180	230	360	180	230	360
		3.50	203.52	3.50	9.91	13.32		0.70	130	170	250	150	200	300	180	230	330	180	230	360	180	250	380
								1.00	130	180	280	150	200	300	150	230	330	180	250	360	200	250	410
		4.00	218.85	4.00	11.13	15.12		1.50	-	-	-	150	200	300	150	230	360	180	250	380	200	280	430
176.207.1Y.11.00 176.407.1Y.11.00 176.507.1Y.11.00	2,05	0.15	59.20	0.15	3.64	3.36	1.00	0.35	200	280	410	280	360	480	330	430	530	330	480	690	410	480	660
		0.30	84.97	0.30	5.37	4.91		0.70	200	280	410	280	360	480	300	410	580	360	460	710	410	530	760
		0.70	129.79	0.70	8.53	7.87		1.00	150	230	360	230	300	460	280	360	530	300	430	610	360	510	740
								1.50	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		1.00	159.42	1.00	10.84	10.08	2.00	0.35	100	140	220	140	190	280	180	230	360	230	280	380	250	330	480
		1.35	184.59	1.35	12.98	12.16		0.70	100	150	230	140	190	280	180	250	380	200	280	410	250	330	480
		1.70	206.70	1.70	14.92	14.07		1.00	100	150	250	130	180	280	170	220	330	200	280	410	240	300	480
								1.50	-	-	-	-	-	-	150	230	330	190	250	380	230	300	430
		2.00	226.76	2.00	16.91	15.97	2.75	0.35	90	130	180	110	170	250	150	200	300	180	230	330	200	280	380
		2.40	245.27	2.40	18.94	17.69		0.70	90	130	200	130	170	250	150	200	300	180	230	360	200	280	410
		2.75	262.64	2.75	20.86	19.64		1.00	90	110	180	120	150	250	140	190	300	170	230	330	200	280	380
								1.50	90	130	200	110	150	250	140	200	300	150	230	360	200	280	380
		3.15	279.03	3.15	22.82	21.53	4.00	0.35	90	110	150	110	150	230	140	190	250	150	220	360	180	250	410
		3.50	293.98	3.50	24.72	23.33		0.70	90	110	180	100	140	220	130	190	290	150	200	330	180	250	360
								1.00	80	110	190	110	150	230	130	180	280	150	230	330	170	250	380
		4.00	317.15	4.00	27.80	26.33		1.50	-	-	-	100	150	230	130	180	250	150	200	330	170	240	360





Ordering no.	Narrow- est free cross section Ø [mm]	Liquid		Air			Spray dimensions [mm] at distance D ₁ , D ₂ and D ₃																		
Type		Liquid pressure p [bar]	V̇ water [l/h]	Air pressure p air [bar]	Atomizing air [m³/h]	Fan air [m³/h]	Atomizing air [bar]	Liquid pressure p [bar]	Fan air [bar]																
									0.70			1.00			1.40			1.75			2.00				
									Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm	Ø D ₁ = 150 mm	Ø D ₂ = 230 mm	Ø D ₃ = 380 mm		
176.208.1Y.11.00 176.408.1Y.11.00 176.508.1Y.11.00	2.36	0.15	97.20	0.15	3.84	4.40	1.00	0.35	190	280	430	280	360	610	300	460	710	-	-	-	-	-	-		
		0.30	114.76	0.30	4.64	5.28		0.70	190	280	430	250	360	610	330	480	760	-	-	-	-	-	-		
		0.70	162.98	0.70	6.80	7.87		1.00	-	-	-	230	330	560	300	430	690	-	-	-	-	-	-		
		1.00	199.13	1.00	8.63	10.08		1.50	-	-	-	250	360	530	300	380	580	-	-	-	-	-	-		
		1.35	229.60	1.35	10.21	12.16	2.00	0.35	110	190	300	170	250	360	200	280	410	230	330	460	280	460	560		
		1.70	256.24	1.70	11.86	14.07		0.70	110	180	250	170	230	360	220	280	410	230	360	510	270	380	530		
		2.00	280.70	2.00	13.37	15.97		1.00	110	170	230	140	200	330	190	250	410	230	300	480	280	380	610		
		2.40	302.99	2.40	14.99	17.69		1.50	-	-	-	150	200	330	200	280	380	220	300	460	270	380	560		
		2.75	324.03	2.75	16.33	19.64	2.75	0.35	110	170	230	140	190	280	170	250	360	200	280	380	250	360	460		
		3.15	343.22	3.15	17.99	21.53		0.70	100	150	230	140	200	300	170	240	360	200	280	430	230	330	480		
		3.50	361.32	3.50	19.27	23.33		1.00	100	140	200	130	180	280	170	230	380	200	280	410	230	330	480		
		4.00	388.72	4.00	21.73	26.33		1.50	90	130	200	130	180	280	150	220	360	190	280	460	230	320	460		
		176.209.1Y.11.00 176.409.1Y.11.00 176.509.1Y.11.00	2.54	0.15	82.06	0.15	1.87	3.36	1.00	0.35	200	300	460	280	380	610	330	460	710	410	530	760	460	660	810
				0.30	119.53	0.30	3.77	4.91		0.70	200	280	430	280	410	610	330	480	690	410	560	740	460	640	810
				0.69	180.05	0.69	6.58	7.87		1.00	-	-	-	-	-	-	300	460	690	410	510	690	430	580	810
				1.03	221.23	1.03	8.50	10.08		1.50	-	-	-	-	-	-	300	460	690	380	530	760	430	580	810
1.38	255.60			1.38	10.13	12.16	2.00	0.35	130	200	300	180	250	380	200	280	460	250	330	510	280	360	560		
1.72	285.50			1.72	11.57	14.07		0.70	130	180	280	170	230	360	200	280	460	230	330	560	280	380	610		
2.07	312.94			2.07	13.13	15.97		1.00	100	170	280	170	230	360	200	280	430	230	330	510	280	380	560		
2.41	338.83			2.41	14.71	17.69		1.50	-	-	-	-	-	-	200	250	430	230	300	460	250	380	560		
2.76	362.49			2.76	16.26	19.64	2.75	0.35	100	150	230	150	200	330	170	230	410	200	280	460	240	360	510		
3.10	384.75			3.10	17.75	21.53		0.70	100	150	230	140	190	300	180	240	410	200	280	460	230	360	560		
3.45	405.71			3.45	19.33	23.33		1.00	90	140	230	140	190	300	180	250	410	200	280	460	250	360	560		
4.00	436.86			4.00	21.83	26.33		1.50	100	140	200	140	190	300	180	250	410	200	280	460	230	330	510		
176.209.1Y.11.00 176.409.1Y.11.00 176.509.1Y.11.00	2.54			3.10	384.75	3.10	17.75	21.53	4.00	0.35	100	140	200	130	180	250	140	190	280	180	250	360	190	250	410
				3.45	405.71	3.45	19.33	23.33		0.70	90	130	200	130	180	280	150	200	300	170	230	360	200	280	410
				3.75	428.91	3.75	20.83	25.00		1.00	90	130	180	110	150	250	140	200	300	180	230	410	200	280	460
				4.00	436.86	4.00	21.83	26.33		1.50	-	-	-	110	150	250	140	180	300	170	230	410	190	280	460


Notice:

The fourth digit in the order number (2, 4 or 5) stands for the housing variant (for details see Page 54).



Spare parts set for pneumatic atomizing nozzles Series 176 ViscoMist

Overview of the spare parts set and the power set

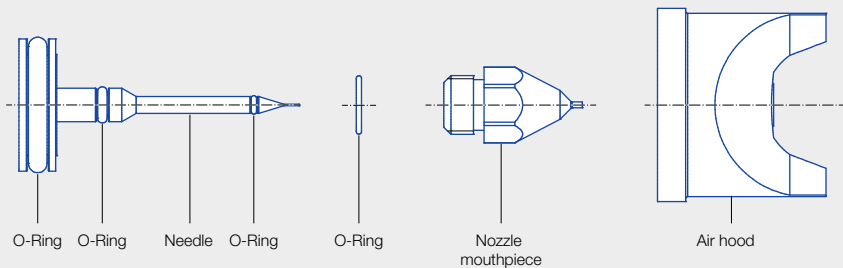

Spare parts set

Spare parts set for replacing the main wear parts of the nozzle, consisting of:

- Needle (stainless steel 316L)
- O-rings (Viton)
- Nozzle tip (stainless steel 316L)

Ordering no.	Narrowest free cross section Ø [mm]	For nozzles
Type		
017.601.1Y.01	0.38	176.xx1.1Y.11.00
017.602.1Y.01	0.58	176.xx2.1Y.11.00
017.603.1Y.01	0.79	176.xx3.1Y.11.00
017.604.1Y.01	1.07	176.xx4.1Y.11.00
017.605.1Y.01	1.32	176.xx5.1Y.11.00
017.606.1Y.01	1.32	176.xx6.1Y.11.00
017.607.1Y.01	2.05	176.xx7.1Y.11.00
017.608.1Y.01	2.36	176.xx8.1Y.11.00
017.609.1Y.01	2.54	176.xx9.1Y.11.00

Power set

Power set for replacing the main wear parts of the nozzle and the air hood, consisting of:

- Needle (stainless steel 316L)
- O-rings (Viton)
- Nozzle tip (stainless steel 316L)
- Air hood (stainless steel 316L)

Ordering no.	Narrowest free cross section Ø [mm]	For nozzles
Type		
017.601.1Y.00	0.38	176.xx1.1Y.11.00
017.602.1Y.00	0.58	176.xx2.1Y.11.00
017.603.1Y.00	0.79	176.xx3.1Y.11.00
017.604.1Y.00	1.07	176.xx4.1Y.11.00
017.605.1Y.00	1.32	176.xx5.1Y.11.00
017.606.1Y.00	1.32	176.xx6.1Y.11.00
017.607.1Y.00	2.05	176.xx7.1Y.11.00
017.608.1Y.00	2.36	176.xx8.1Y.11.00
017.609.1Y.00	2.54	176.xx9.1Y.11.00

Notice:

Instructions for replacing individual or all components of the nozzles are included in the scope of delivery of the spare parts sets and the power sets.

O-ring set

Ordering no.		Consisting of 4 O-rings, suitable for all nozzles of series 176
Type	Mat. no.	
	7A	6C
	Viton	EPDM
017.600.xx.01.03	●	●

Viton (7A) is the standard O-ring material.
EPDM (6C) is optionally available.

Ordering Type + Material no. = Ordering no.
example: 017.600.xx.01.03 + 7A = 017.600.7A.01.03