



NOZZLE FASTENING ASSEMBLING OPTIONS FOR ALL PURPOSES




Assembly accessories for nozzles without thread or with female thread

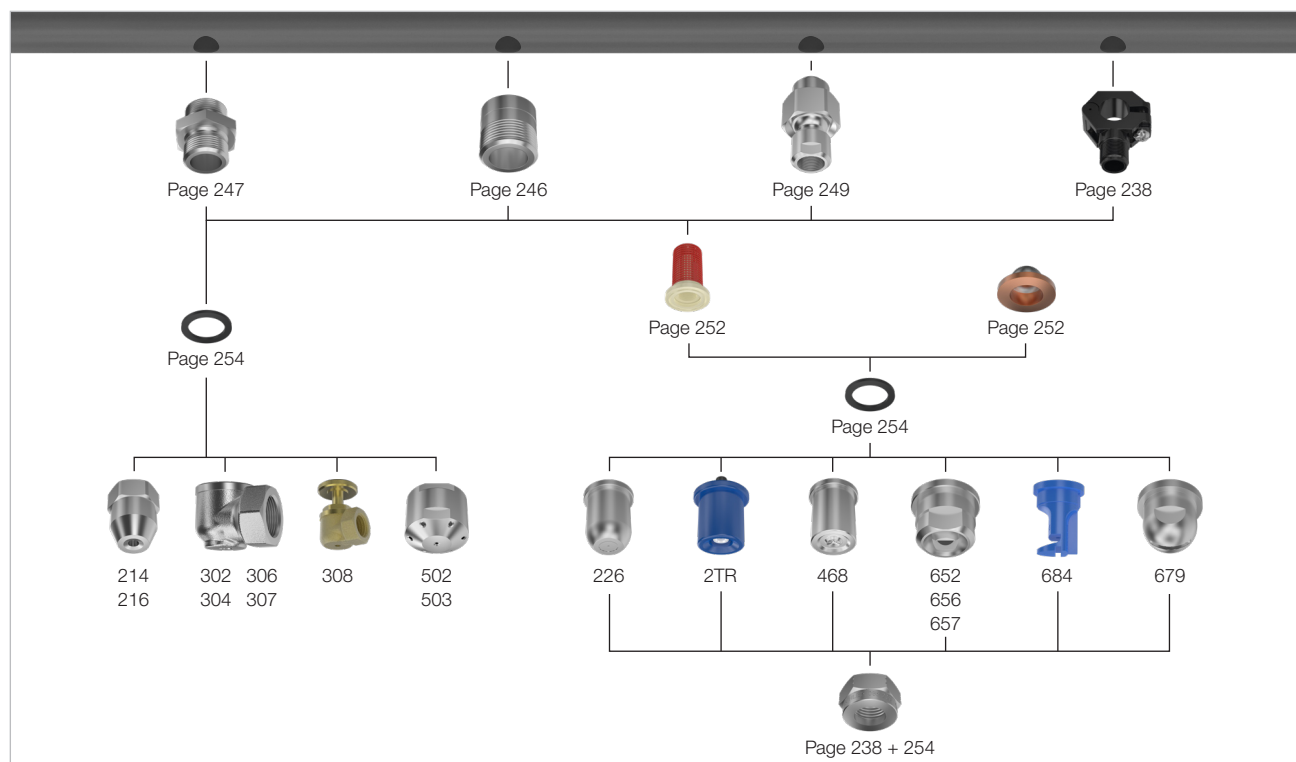


Bayonet quick-release system for nozzles without thread or with bayonet connection

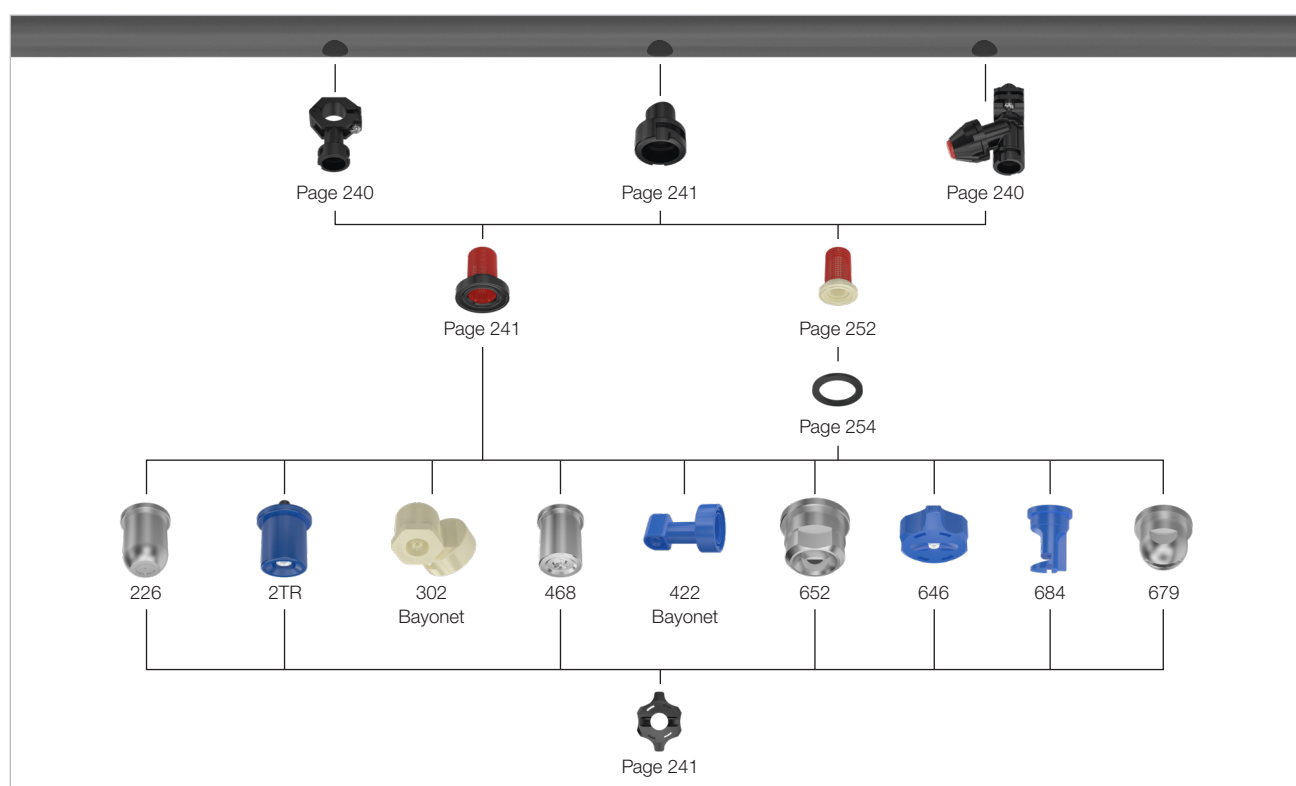

Bayonet quick-release system with ball joint for nozzles with male thread

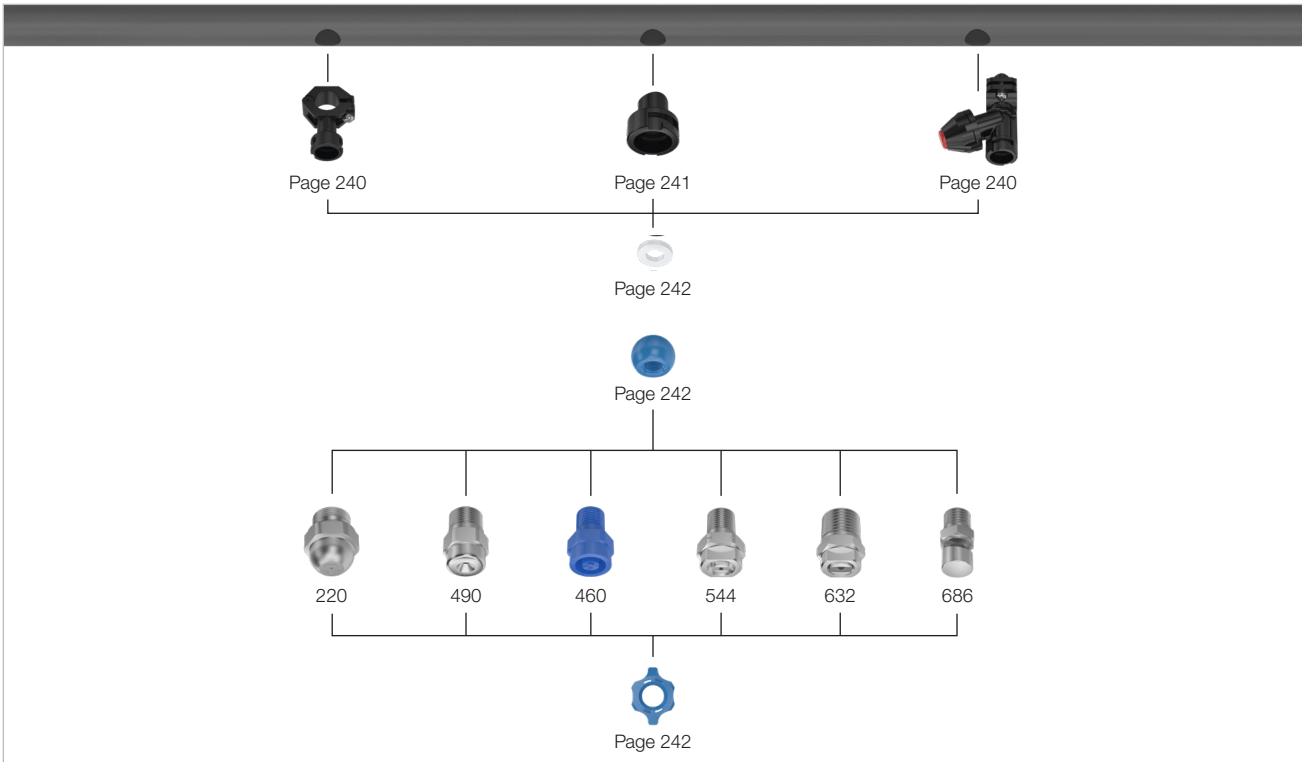


Assembly accessories for nozzles with male thread

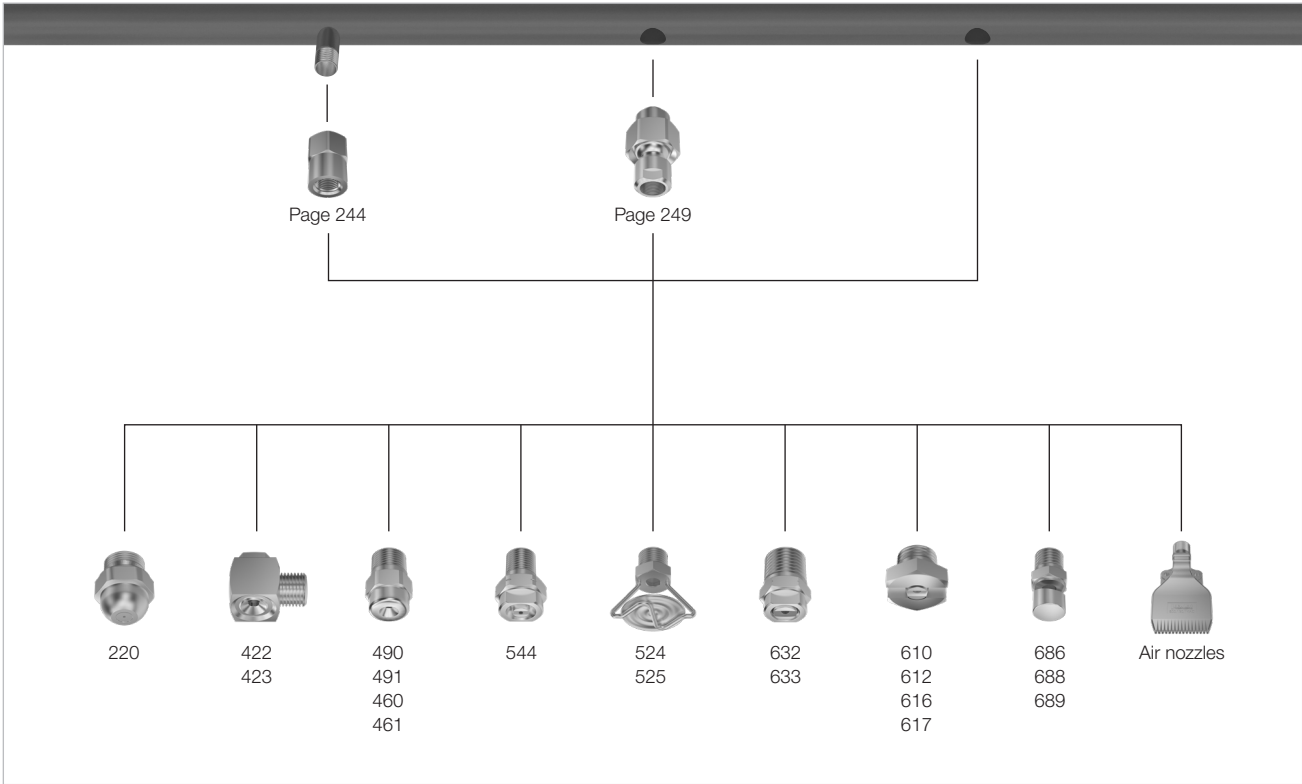

Eyelet clamps with bayonet connection



Eyelet clamps with bayonet quick-release system

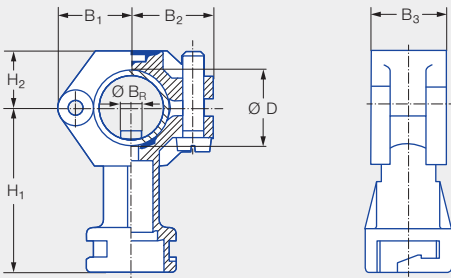


Series	Ordering no.					Screw (material)	Pipe Ø	Dimensions [mm]								Weight [g] (Polyamide)
	Type	Mat. no.			Code											
		51 Black	53 White	5E Blue												
		Poly- amide	Polypro- pylene	PVDF												
							B ₁	B ₂	B ₃	H ₁	H ₂	Ø B _R ¹	Ø B ²	Ø D		
226/2TR/ 302 bayonet/ 422 bayonet/ 468/652/646/ 684/679	090.003	●	●	●	KA	Stainless steel 304	1/2"	21.2	23.8	18.5	49.5	16.5	6.0	6.2–6.4	20.0–22.0	22.0
	090.013	●	●	●	KA		3/4"	24.5	26.5	22.0	52.5	17.5	7.6	7.8–8.0	25.0–27.5	26.0
	090.023	●	●	●	KA		1"	30.0	31.0	22.0	57.0	21.0	10.6	10.8–11.0	32.0–34.5	32.0

¹ Ø B_R = spigot diameter.

² Ø B = recommended bore diameter.

Diaphragm non-return valve with bayonet quick-release system

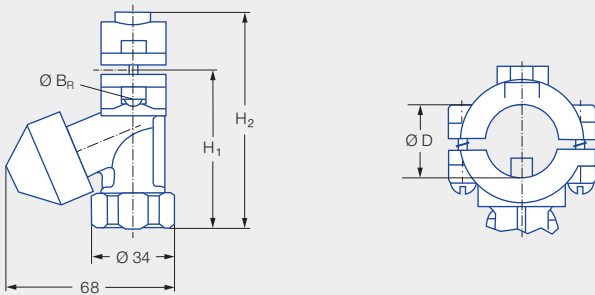

Series	Ordering no.			Screw (material)	Pipe Ø	Ø D [mm]	Pressure [bar]		Dimensions [mm]				Weight [g]
	Type	Mat. no.	Code				Opening pressure	Closing pressure	H ₁	H ₂	Ø B _R ¹	Ø B ²	
		56 Black											
226/2TR/ 302 bayonet/ 422 bayonet/ 468/652/646/ 684/679	065.272	●	KH	Stainless steel 303	1/2"	20.0–22.0	0.8	0.6	59.0	84.0	6.0	6.2–6.4	48.0
	065.272	●	KL		3/4"	25.0–27.5	0.8	0.6	66.0	90.0	9.6	9.8–10.0	53.0

¹ Ø B_R = spigot diameter.

² Ø B = recommended bore diameter.



Material	Max. temperature [°C]	Max. pressure [bar]
PA, PP, PVDF, POM	65	10
PA, PP, PVDF, POM	80	8
PVDF	100	4

Notice: Please consider the material combination when using bayonet eyelet clamps with bayonet quick-release system nuts. The nuts may be difficult to turn when using different materials.

» Accessories
for bayonet system



Bayonet welded nipple

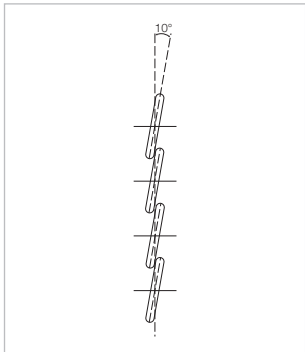


Twist angle to the right in relation to the pipe axis. Twist angle 10°. Other twist angles available on request.

Series	Ordering no.		Mat. no.		Dimensions [mm]		Weight [g]
			50	53			
	Type		PVC	Polypropylene	L	R	
226/2TR/302 bayonet/ 422 bayonet/468/ 652/646/684/679	095.016.xx.08.05 ¹		●	●	25.0	16.0	10.0

¹ Replace "xx" with the desired material no.

Strainer with gasket


Suitable for bayonet quick-release system
nuts 065.202



Performance size	Ordering no.		Colour	Dimensions [mm]					Weight [g]
	Type	Mat. no.		Mesh size	H ₁	H ₂	Ø D ₁	Ø D ₂	
		7J							
		POM/Santoprene							
xxx.32x-xxx.44x	065.268	●	Blue	0.25	19.20	3.00	18.00	12.00	2.00
xxx.48x-xxx.56x	065.269	●	Red	0.65	19.20	3.00	18.00	12.00	2.00

Bayonet
quick-release system nuts


Incl. gasket 065.242.73
(material: Rubber)



Series	Ordering no.			Colour	Weight [g]
	Type	POM	Polypropylene	PVDF	
652/679	065.202.56.00	●			Red 10.0
	065.202.53.00		●		Grey 10.0
	065.202.5E.00			●	Blue 10.0

Bayonet
quick-release system nuts

Incl. gasket 065.242.73
(material: Rubber)



Series	Ordering no.		Colour	Weight [g]
	Type	Mat. no.		
226/2TR/ 468/684	065.202.56.11	●	Black	10.0
	065.202.53.11	●	Grey	10.0

Notice: Please consider the material combination when using bayonet eyelet clamps with bayonet quick-release system nuts. The nuts may be difficult to turn when using different materials.






Ball joints for bayonet quick-release system

Ball joint system for nozzles with 1/8" and 1/4" male thread.


Ball joint for eyelet clamps with bayonet quick-release system




For all nozzles with 1/8" or 1/4" male thread	Ordering no.				Colour	Weight [g]
	Type	Mat. no.	Code			
		PVDF	1/8 BSPP	1/4 BSPP		
Ball joint	092.150	5E	AB	AD	Blue	5.0

Bayonet quick-release system nut for ball joint

Incl. O-ring
Ordering no. 095.015.7C.04.16.0
(material: 72 NBR 872)



For all nozzles with 1/8" or 1/4" male thread	Ordering no.		Colour	Weight [g]
	Type	Mat. no.		
		PVDF		
Quick-release system nut	092.150.5E.00	●	Blue	28.0

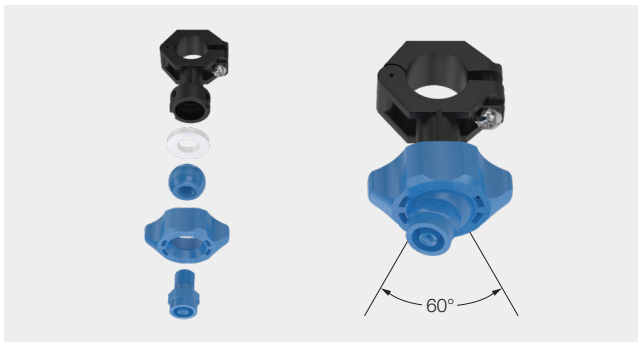

Max. temperature [°C]	Max. pressure [bar]
65	10
80	8
100	4

Ordering Type + Material no. + Code = Ordering no.
example: 092.150 + 5E + AB = 092.150.5E.AB