


If a gliding application is required for a long travel, please consult igus®.

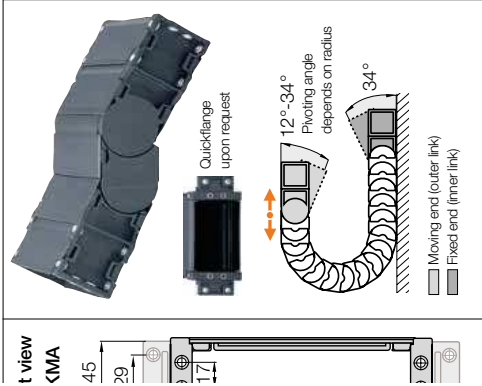

Applications
and standing applications


Width index	A [mm]	B [mm]	Bi [mm]
75	62	74	50
	87	99	75
	112	124	100
	127	139	115
	137	149	125
	162	174	150
	187	199	175
	212	224	200
	237	249	225
	262	274	250

Washer 5.3 DIN 125-ST ● Hexagon nut M5 DIN 934-8
2.QF: Unassembled quickflange: Part No. 16800.QF

Using any base

1680.100.12.A
Order example
Pre-assembled Full set
Width index Series


are available from stock. The complete 2

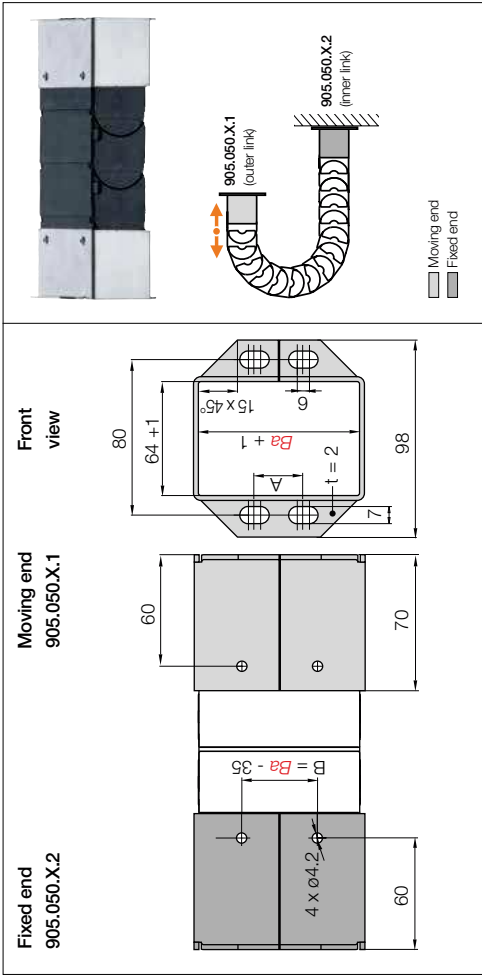


Steel flange, locking | Recommended for unsupported applications

Width index	Hole pattern	Part No. full set	Steel flange	Bi [mm]	Ba [mm]	A [mm]	B [mm]
075. ▲	68.01	905.050.1.12	905.050.1.12	75	93	30	58
115. ▲	68.02	905.050.2.12	905.050.2.12	115	133	50	98
175. ▲	68.03	905.050.3.12	905.050.3.12	175	193	100	158


Mounting only with hexagon socket DIN 912 M8 and washer DIN 125; 6.3mm



Metallic flange brackets with common hole patterns can easily replace alternatives, without having to alter the hole pattern. Flush attachment possibilities at both ends of the e-tube using flange mounting brackets made of steel.



Strain relief e.g. clamps, tie-wrap plates, nuggets and clips are available from stock. The complete chainfix range with ordering options ► From page 1392

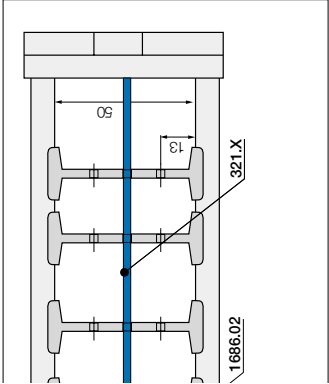

Option 1 | Separators and separator

Simple vertical subdivision. Offers security due to its basic design, also when used with large cables or


Option 2 | Full-width shelves and separator

Interior separation. The slot allows basic vertical and lateral shelving arrangements.

Width shelf

Option is for applications with many small cables with different diameters. For full-width separation.

assembled	X [mm]	un assembled	assembled
321.150	250	320.250	321.250
321.175			
321.200			
321.225			

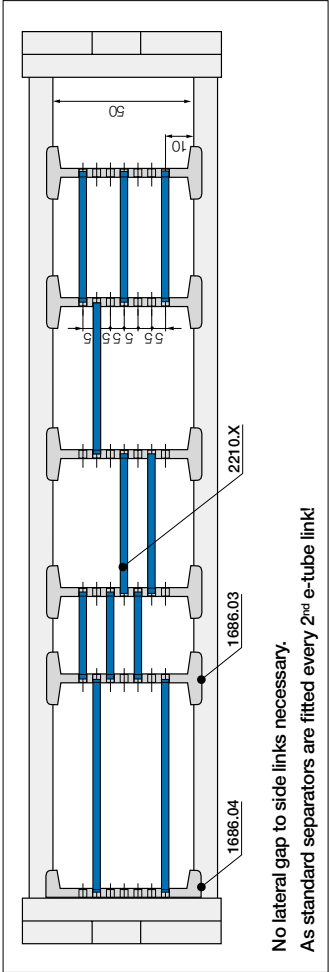

No lateral gap to side links necessary.
As standard separators are fitted every 2nd e-tube link!

Option 3 | Partial shelves and slotted separator





Allows modular shelving arrangements.

Slotted side plate

Allows modular shelving right up to the side links. No clearance required!

Shelf

For applications involving many cables with different diameters, shelves can be fitted at different heights.

		Slotted separator	1685.03
		un assembled	
		assembled	1686.03
		Slotted side plate	1685.04
		un assembled	
		assembled	1686.04
		Shelf for e-tubes	2200.X
		un assembled	
		assembled	2210.X

Shelves

Width = X [mm]

X [mm]	un assembled	assembled	X [mm]	un assembled	assembled
018	2200.18	2210.18	043	2200.43	2210.43
023	2200.23	2210.23	048	2200.48	2210.48
028	2200.28	2210.28	058	2200.58	2210.58
033	2200.33	2210.33	068	2200.68	2210.68
038	2200.38	2210.38	073	2200.73	2210.73

Separator with integrated strain relief teeth

- Can be integrated into the mounting bracket or placed at any point
- Combines strain relief and interior separation, for restricted space conditions
- Strain relief separator is easy to assemble without any screws

Part No. 1685.01.Z - more information ► From page 1424

