







>> **TWISTLOC**
 Quick-change nozzle system

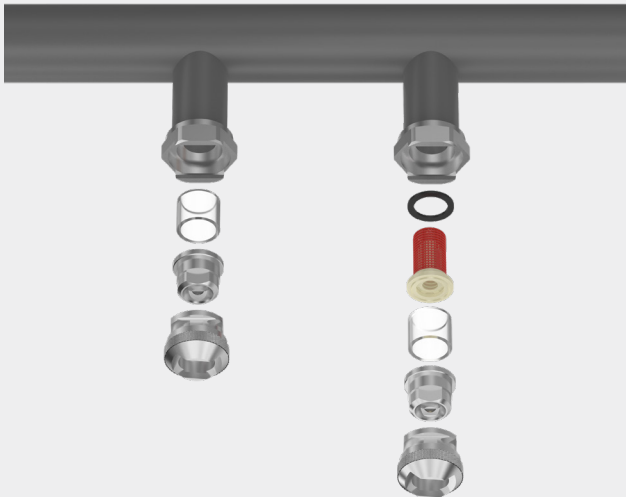


Lechler TWISTLOC,
nozzle changing in less than no time.
 Save time and money with the quick-change
 nozzle system.

- Quick:**
 It takes just one twist to install or remove
 the nozzle.
- Easy:**
 Can be installed without tools – even in
 difficult-to-access locations and in bad lighting
 conditions.
- Safe:**
 Installation errors are avoided, as the nozzles
 are always set to the correct direction.
- Max. pressure:**
 15 bar.



System components		Ordering no.							Inner Ø D [mm]	Weight [g]	
		Type	Mat. no.				Code				
			1C	16	5E	7A					
			Stainless steel 304	Stainless steel 303	PVDF	Viton	1/4 BSPT	3/8 BSPT	Welded connec- tion		
Threaded nipple		092.102		●			CC			8.0	25.0
		092.102		●				CE		11.6	25.0
		092.102			●			CE		8.0	10.0
Welded nipple		092.104	●						00	11.6	45.0
Gasket for material 304 SS and 303 SS		092.113				●				–	1.0
Gasket for material PVDF		092.115					●				–
Gasket, incl. rubber gasket ring for use with non-return valves or strainers		092.116				●				–	2.0
Gasket, incl. rubber gasket ring for use with non- return valves or strainers, for PVDF material		092.114					●				–
Quick-release system For nozzle series 652/679		092.106		●	●					–	20.0 (stainless steel)
Quick-release system For nozzle series 226/468/684		092.108		●	●						–



**Non-return
valves, strainers**

For installation in
nipples with
inner Ø 11.6 mm
(see Page
252/253).

Ordering	Type	+	Material no.	+	Code	=	Ordering no.
example:	092.102	+	16	+	CC	=	092.102.16.CC

