

Technical details

	Cable	208 V	230 V	254 V	277 V	400 V	480 V
Maximum maintain or continuous exposure temperature (power on)	5VPL2-CT	235°C	230°C	225°C	225°C	–	–
	10VPL2-CT	220°C	210°C	200°C	195°C	–	–
	15VPL2-CT	200°C	180°C	145°C	105°C	–	–
	20VPL2-CT	150°C	150°C	–	–	–	–
	5VPL4-CT	–	–	–	–	230°C	230°C
	10VPL4-CT	–	–	–	–	215°C	205°C
	15VPL4-CT	–	–	–	–	195°C	160°C
	20VPL4-CT	–	–	–	–	150°C	150°C
Maximum continuous exposure temperature (power off)	260°C						
Temperature classification T*	To be established using the principles of stabilized design or the use of a temperature limiting device. Use TraceCalc design software or contact nVent for assistance.						
Minimum installation temperature	–60°C						
Minimum bend radius	–60°C ≤ T < –20°C: 19 mm –20°C ≤ T < +10°C: 15 mm T ≥ +10°C: 12 mm						
Minimum clearance	15 mm						


	5VPLx-CT	10VPLx-CT	15VPLx-CT	20VPLx-CT
Nominal cold lead/ heating zone length (m)	1.2 (VPL2) 2.4 (VPL4)	0.9 (VPL2) 1.7 (VPL4)	0.6 (VPL2) 1.3 (VPL4)	0.5 (VPL2) 1.1 (VPL4)

Thermal output rating

Nominal power output rating on insulated steel pipes at 240 V and 480 V (power output of VPL4 at 400 V will be lower)

To choose the correct heating cable for your application use the TraceCalc design software.

- A 20VPL-CT**
- B 15VPL-CT**
- C 10VPL-CT**
- D 5VPL-CT**

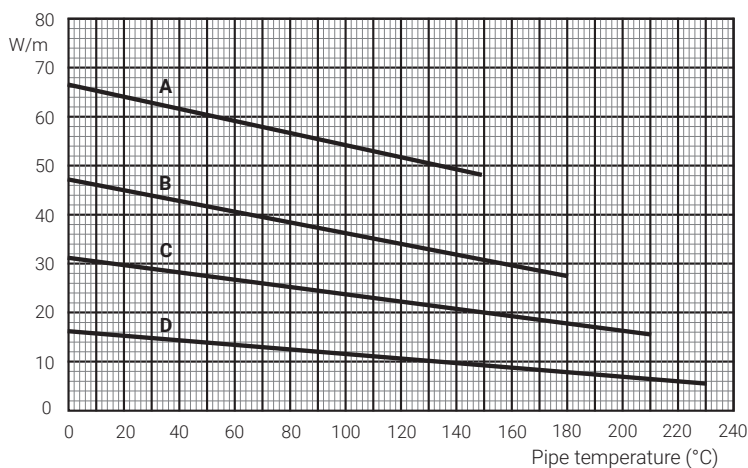

Nominal power output (W/m at 10°C)	5VPLx-CT	10VPLx-CT	15VPLx-CT	20VPLx-CT
VPL2 at 230 V	15	30	45	61
VPL2 at 240 V/VPL4 at 480 V	16	33	49	65
VPL4 at 400 V	12	24	36	49

Adjustment factors

		5VPL2-CT	10VPL2-CT	15VPL2-CT	20VPL2-CT
254 V	Power output	1.2	1.19	1.19	Not allowed
	Circuit length	1.05	1.04	1.04	Not allowed
277 V	Power output	1.3	1.28	1.26	Not allowed
	Circuit length	1.13	1.11	1.09	Not allowed
400 V	Power output	0.72	0.73	0.74	0.75
	Circuit length	0.86	0.87	0.89	0.9



Maximum circuit length based on type 'C' circuit breakers according to EN 60898

VPL2 at 230 V		5VPL2-CT	10VPL2-CT	15VPL2-CT	20VPL2-CT
Electrical protection sizing	Start-up temperature	Maximum heating cable length per circuit (m)			
16 A	-20°C	195	100	70	50
	+10°C	215	110	75	55
25 A	-20°C	220*	155*	105	80
	+10°C	220*	155*	115	85
32 A	-20°C	220*	155*	130*	100
	+10°C	220*	155*	130*	110*
40 A	-20°C	220*	155*	130*	110*
	+10°C	220*	155*	130*	110*

VPL4 at 480 V and 400 V		5VPL4-CT	10VPL4-CT	15VPL4-CT	20VPL4-CT
Electrical protection sizing	Start-up temperature	Maximum heating cable length per circuit (m) at 480 Vac and (at 400 Vac)			
16 A	-20°C	390 (335)	195 (170)	130 (115)	100 (90)
	+10°C	425 (365)	210 (185)	140 (125)	105 (95)
25 A	-20°C	450* (450)	310 (265)	205 (185)	155 (140)
	+10°C	450* (450)	320* (290)	220 (195)	165 (150)
32 A	-20°C	450* (450)	320* (320)	260* (235)	200 (180)
	+10°C	450* (450)	320* (320)	260* (250)	210 (190)
40 A	-20°C	450* (450)	320* (320)	260* (260)	225* (225)
	+10°C	450* (450)	320* (320)	260* (260)	225* (225)

*The maximum heating cable length must not exceed these values, even when voltage adjustment factors are used.

The above numbers are for circuit length estimation only. For more detailed information please use the nVent RAYCHEM TraceCalc software or contact your local nVent representative.

nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.

Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

T6...T2 using stabilized design

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design. Use TraceCalc design software or contact nVent.

Product certification



More details about product certification, approvals and conditions of safe use are available in the installation manual for Constant Wattage Parallel Circuit Heating Cable Systems at www.nVent.com/RAYCHEM

ORDERING INFORMATION

Part description	5VPL2-CT	10VPL2-CT	15VPL2-CT	20VPL2-CT
Part No.	451828-000	892652-000	068380-000	589252-000
Part description	5VPL4-CT	10VPL4-CT	15VPL4-CT	20VPL4-CT
Part No.	P000000678	P000000679	P000000680	P000000681
Weight (g/m)	200	200	200	200

Components

nVent offers a full range of components for power connections, splices and end seals.

These components must be used to ensure proper functioning of the product and compliance with electrical requirements.