

AF

G1/8 ÷ G1 1/2 Poppet valves for compressed air

- Wide range: G1/8 - G1/4 - G3/8 - G1/2 - G3/4 - G1 - G1 1/2
- UNIVER Original poppet system appreciated for decades
- Suitable for applications where high flow rate and high cycles rates are required
- G1 - 2/2 version for blowing

Available ATEX version upon request

CE Ex II 2Gc IIC T5 II 2Dc T100°C
CE Ex II 3 GD c nA II T5-10°C ≤ Ta ≤ 45°C

TECHNICAL CHARACTERISTICS

Ambient temperature	+50 °C max						
Fluid temperature	-5 ÷ +60 °C						
Fluid	50 µm filtered air, with or without lubrication						
Commutation system	poppet						
Ways/Positions	2/2 NC (upon request), 3/2 NC, 3/2 NO, 3/2 NC-NO						
Pressure	max 10 bar						
Control	pneumatic, indirect electropneumatic						
Return	pneumomechanical spring						
Connections	G 1/8	G 1/4	G 3/8	G 1/2	G 3/4	G 1	G 1 1/2
Nominal Ø (mm)	5,5	8	10	15	19	25	39
Nominal flow rate (NI/min)	580	1100	1500	5400	6500	13500	35000

CONSTRUCTIVE CHARACTERISTICS


Valve body	G1/8 ÷ G1 = zamak G1 1/2 = aluminium
Seals	polyurethane conical poppets and Vulkollan diaphragm
Actuators	G1/8 ÷ G1 = zamak G1 1/2 = aluminium
Spool	G1/8 ÷ G3/8 = aluminium G1/2 ÷ G1 1/2 = steel + plastic

ELECTRIC CHARACTERISTICS

	G1/8 G3/8	G1/4 ÷ G1 1/2
Electropilot	U1	U2
Coil	DA	DB
Power consumption	3,5 W (DC) - 5 VA (AC)	11 W (DC) - 10 VA (AC)
Connector	AM-5110	AM-5111
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC	
Manual override	impulse screw - 2 positions	




G1/8 - G1/4 - G3/8 Electrovalves

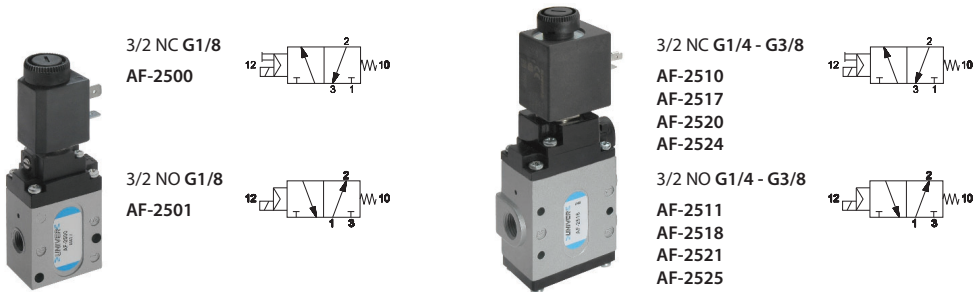


Connect.	Control	Return	Flow rate	Ø	Resp. Time (ms)		Pressure bar		Weight	Coil	Part no.	
	12	10	(Nl/min)	mm	En.	De-en.	min.	max.	Kg			
3/2 NC	G1/8	electric amplified	pneumomechanical spring	580	5,5	15	20	1,5	10	0,25	U1	AF-2500
	G1/4	electric amplified	pneumomechanical spring	1100	8	20	23	1,6	10	0,58	U1	AF-2510
	G1/4	electric amplified	pneumomechanical spring	1100	8	20	23	1,6	10	0,70	U2	AF-2517
	G3/8	electric amplified	pneumomechanical spring	1500	10	20	23	1,6	10	0,56	U1	AF-2520
	G3/8	electric amplified	pneumomechanical spring	1500	10	20	23	1,6	10	0,70	U2	AF-2524
3/2 NO	G1/8	electric amplified	pneumomechanical spring	580	5,5	15	20	1,5	10	0,25	U1	AF-2501
	G1/4	electric amplified	pneumomechanical spring	1100	8	15	20	1,6	10	0,58	U1	AF-2511
	G1/4	electric amplified	pneumomechanical spring	1100	8	15	20	1,6	10	0,70	U2	AF-2518
	G3/8	electric amplified	pneumomechanical spring	1500	10	15	20	1,6	10	0,56	U1	AF-2521
	G3/8	electric amplified	pneumomechanical spring	1500	10	15	20	1,6	10	0,70	U2	AF-2525

G1/8

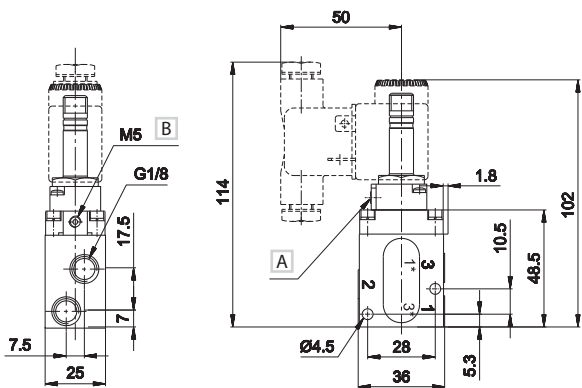

- NC
- 1 = Supply port
- 2 = Use
- 3 = Exhaust
- NO
- 1* = Supply port
- 2 = Use
- 3* = Exhaust
- A Manual override
- B External servoassistance of the pilot

G1/4 - G3/8

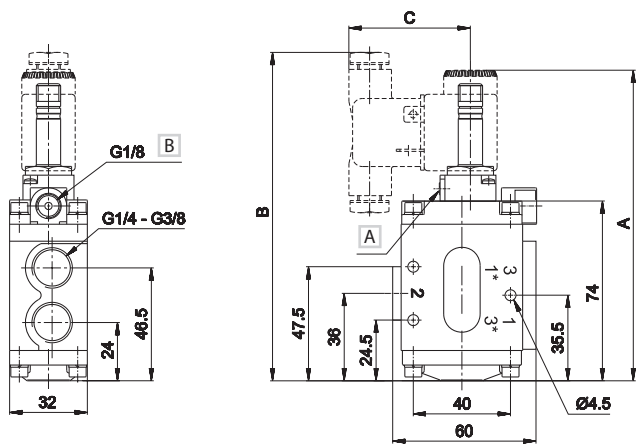

- NC
- 1 = Supply port
- 2 = Use
- 3 = Exhaust
- NO
- 1* = Supply port
- 2 = Use
- 3* = Exhaust
- A Manual override
- B External servoassistance of the pilot

	A	B	C
U1	129	136	50
U2	140,5	150	51,5

Upon request:


- external servoassistance of the pilot
- G1/4 - G3/8 U2 without manual override
- for 2/2 version put a plug into the exhaust

Electrovalves are supplied without coil, connector and locking ring


G1/2 - G3/4 - G1 - G1 1/2 Electrovalves




3/2 NC G1/2 - G3/4 - G1
AF-2530
AF-2540
AF-2545




3/2 NC G1 1/2
AF-2561



3/2 NO G1/2 - G3/4 - G1
AF-2531
AF-2541
AF-2546




3/2 NO G1 1/2
AF-2561



	Connect.	Control	Return	Flow rate	Ø	Resp. Time (ms)		Pressure bar		Weight	Coil	Part no.
						En.	De-en.	min.	max.			
3/2 NC	G1/2	electric amplified	pneumomechanical spring	5400	15	17	27	2	10	1,19	U2	AF-2530
	G3/4	electric amplified	pneumomechanical spring	6500	19	17	27	2	10	1,13	U2	AF-2540
	G1	electric amplified	pneumomechanical spring	13500	25	20	32	2,2	10	1,62	U2	AF-2545
	G1 1/2	electric amplified	pneumomechanical spring	35000	39	47	22	2,5	10	2,27	U2	AF-2565
3/2 NO	G1/2	electric amplified	pneumomechanical spring	5400	15	30	22	3	10	1,19	U2	AF-2531
	G3/4	electric amplified	pneumomechanical spring	6500	19	30	22	3	10	1,13	U2	AF-2541
	G1	electric amplified	pneumomechanical spring	13500	25	28	23	3	10	1,62	U2	AF-2546
	G1 1/2	electric amplified	pneumomechanical spring	35000	39	55	20	3	10	2,27	U2	AF-2561

G1/2 - G3/4 - G1

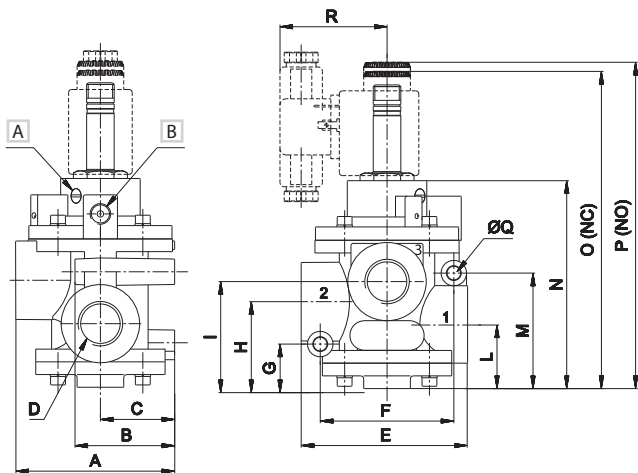


1 = Supply port
2 = Use
3 = Exhaust

A Manual override
B External servoassistance of the pilot

	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R
G1/2	75	47	35	G1/2	78,5	63	21	41	50,5	30	54,5	100	150	154	6,4	50,5
G3/4	75	47	35	G3/4	78,5	63	21	41	50,5	30	54,5	100	150	154	6,4	50,5
G1	89	55	40	G1	101	76	25,5	51	64	38	62,5	115	167	175	8,4	50

G1 1/2

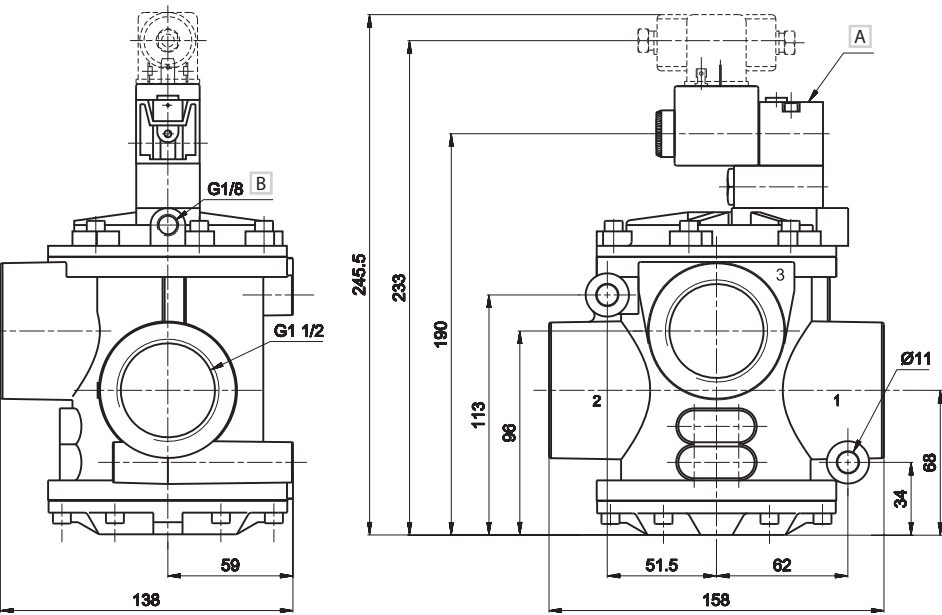



1 = Supply port
2 = Use
3 = Exhaust

A Manual override
B External servoassistance of the pilot

Upon request:
- external servoassistance of the pilot
Electrovalves are supplied without coil, connector and locking ring


Subject to change

G1/8 - G1/4 - G3/8 Servo valves

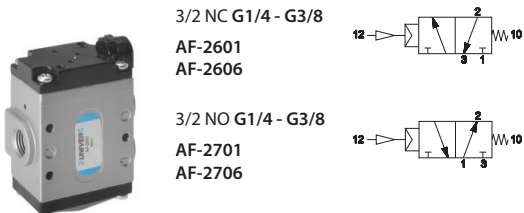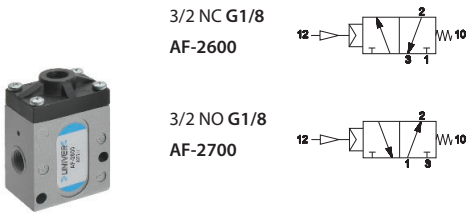

	Connect.	Control	Return	Flow rate	Ø	Resp. Time (ms)		Pressure bar		Weight	Part no.
						En.	De-en.	supply	control		
3/2 NC	G1/8	pneumatic amplified	pneumomechanical spring	580	5,5	5	8	6	3,5	0,21	AF-2600
	G1/4	pneumatic amplified	pneumomechanical spring	1100	8	5	7	6	4	0,54	AF-2601
	G3/8	pneumatic amplified	pneumomechanical spring	1500	10	5	7	6	4	0,52	AF-2606
3/2 NO	G1/8	pneumatic amplified	pneumomechanical spring	580	5,5	5	8	6	3,5	0,21	AF-2700
	G1/4	pneumatic amplified	pneumomechanical spring	1100	8	5	7	6	4	0,54	AF-2701
	G3/8	pneumatic amplified	pneumomechanical spring	1500	10	5	7	6	4	0,52	AF-2706


G1/8

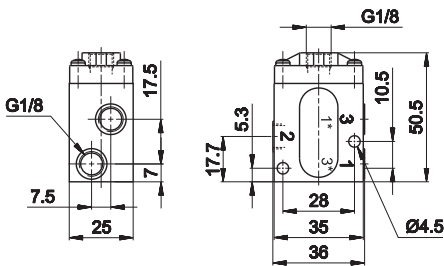

NC
1 = Supply port
2 = Use
3 = Exhaust

NO
1* = Supply port
2 = Use
3* = Exhaust

G1/4 - G3/8

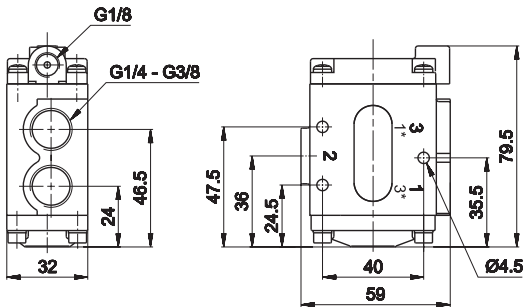

NC
1 = Supply port
2 = Use
3 = Exhaust


NO
1* = Supply port
2 = Use
3* = Exhaust

Upon request:
- for 2/2 version put a plug into the exhaust


G1/2 - G3/4 - G1 - G1 1/2 Servo valves



3/2 NC-NO G1/2 - G3/4 - G1
AF-2603
AF-2610
AF-2615




3/2 NC-NO G1 1/2
AF-2620



3/2 NC-NO

Connect.	Control	Return	Flow rate (NI/min)	Ø mm	Resp. Time (ms)		Pressure bar		Weight Kg	Part no.
	12	10			En.	De-en.	supply	control		
G1/2	pneumatic amplified	pneumomechanical spring	5400	15	7	10	6	4	1,27	AF-2603
G3/4	pneumatic amplified	pneumomechanical spring	6500	19	7	10	6	4	1,10	AF-2610
G1	pneumatic amplified	pneumomechanical spring	13500	25	10	12	6	4	1,59	AF-2615
G1 1/2	pneumatic amplified	pneumomechanical spring	35000	39	36	15	6	4	2,19	AF-2620


G1/2 - G3/4 - G1

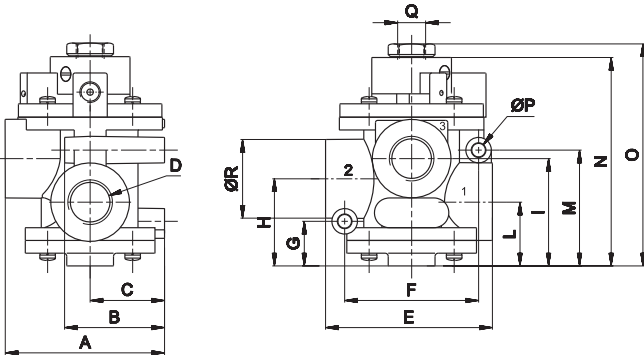

1 = Supply port
2 = Use
3 = Exhaust


	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R
G1/2	75	47	35	G1/2	78,5	63	21	41	50,5	30	54,5	100	105	6,4	G1/4	37
G3/4	75	47	35	G3/4	78,5	63	21	41	50,5	30	54,5	100	105	6,4	G1/4	37
G1	88,5	55	40	G1	101	76	25,5	51	64	38	62,5	115	120,5	8,4	G1/4	45

G1 1/2

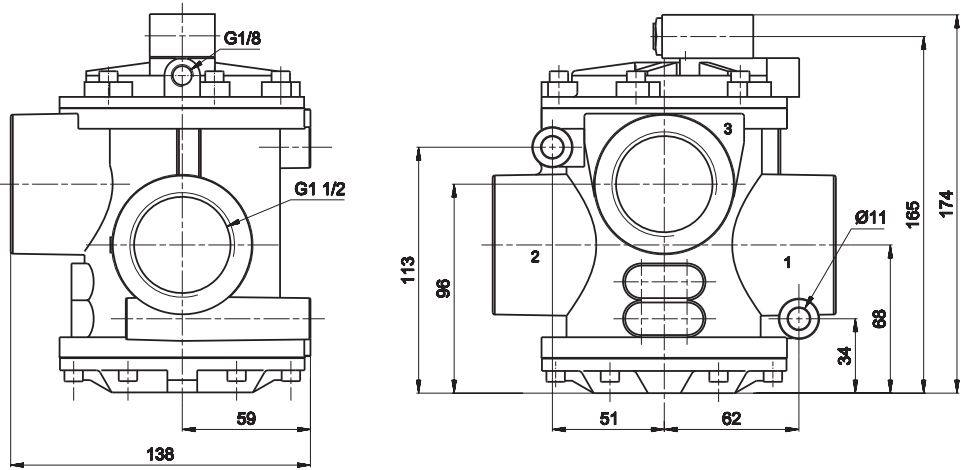


1 = Supply port
2 = Use
3 = Exhaust

G1 - 2/2 Electrovalve for blowing



2/2 NC


Connect.	Control	Return	Flow rate	Ø	Resp. Time (ms)			Pressure bar		Weight	Part no.
					En.	De-en.	min.	max	supply		
G1	electric amplified	pneumomechanical spring	16000	25	23	55	2	10	-	1,06	AF-2550
	electric amplified	pneumomechanical spring	16000	25	23	55	2	10	-	1,06	AF-2551
	electric amplified	pneumomechanical spring	16000	25	23	35	-	-	6	1,06	AF-2552

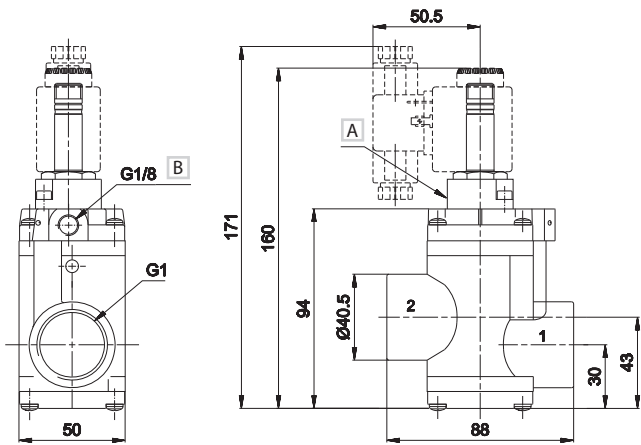

1 = Supply port
2 = Use


A Manual override AF-2551
B External servoassistance of the pilot AF-2552

G1 - 2/2 Servovalve for blowing



2/2 NC

Connect.	Control	Return	Flow rate	Ø	Resp. Time (ms)			Pressure bar		Weight	Part no.
					En.	De-en.	min.	max	supply		
G1	pneumatic amplified	pneumomechanical spring	16000	25	12	25		6	4	1	AF-2617

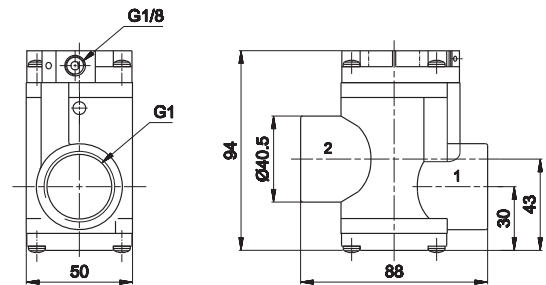

1 = Supply port
2 = Use

Electrovalves are supplied without coil, connector and locking ring