

GENERAL CHARACTERISTICS



MODULAR level switch with 1 electrical contact. The user is able to obtain a level switch of the desired length interposing an extension pipe between the control unit and the process fitting. The electrical contact inside the control unit is sealed and immersion proof. The assembly kit can be selected from a wide series of options that allows the user to adapt it to the most common types of installation.

- Closed cell float.
- Sealed contact and immersion proof.
- Easy mounting, threaded or flanged.
- Pipe and fittings kit for assembling.
- Operating ambient temperature -30 / +55 ° C, RH 90%
- DIN 43650 Plug.
- Minimum degree of protection IP65.




COMPOSITION OF THE KIT

Tab. 1

Component			Description								Code	
Control unit	S1	Float	SPANSIL – Butadiene Acrylonitrile Copolymer closed cells								B45	
Nickel plated brass	B		Ø 30 x 45 mm				S.G. 0, 35		20 Bar		-	
1/8” GAS male thread	-	Electrical contact	SPST	N.C.	N.O. Overturning the float of 180°			250V	80W	80VA	1,3A	4
Cable length 4 m	4M		SPDT	Changeover contact				230V	60W	60VA	1,0A	7
Process connection		Brass	Threaded		1” UNI 228/1 male thread			SW 40			25GO	
			Flanged		Double fixing (2 or 3 holes)			Ø 55 mm			FOPX	
Fitting assembly			N.1	1/8” Gas-female thread			N.1	1/8” Gas-male thread			-	
Electrical output			DIN 43650 Plug				IP 65				S1	
Max. temperature °C			105 °C								L	
Sealing gasket			NBR flat gasket								1	
Built-in thermostat °C		On request	30	40	50	60	70	80	90	100	N.O.	°CT1
												N.C.
Extension pipe Ø 8 mm		On request	Brass		0500 mm.		1000 mm.		1500 mm.		KIT.Pipe	

DIMENSIONS

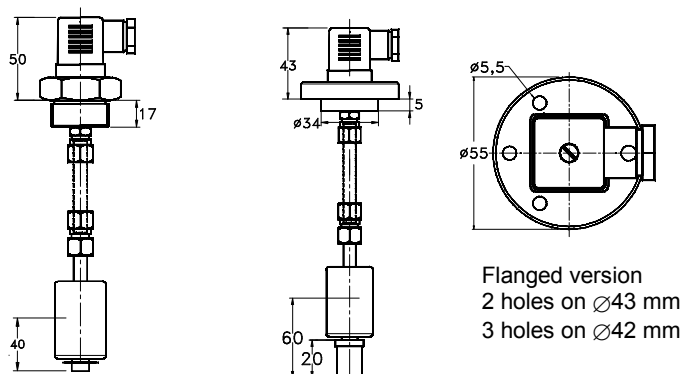


WIRING

Tab.2

With the thermostat option the customer must define the level contact status. Level contact and the thermostat contact are common wired.

I Independent	C Common	1 NO	2 NC	3 SPDT
Wiring		Contact status in no level condition		

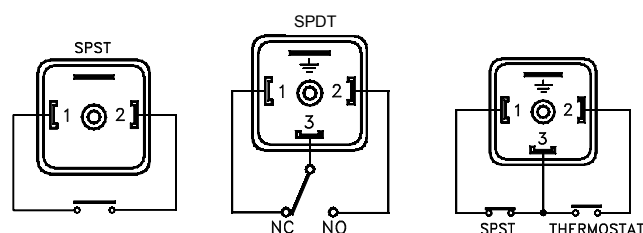

NOMENCLATURE

KIT.S1	B45	4	B	25GO	S1	L	1	I2	60T1	4M
--------	-----	---	---	------	----	---	---	----	------	----

o.z. MERES, HENNLICH s.r.o. | meres@hennlich.cz | +420 416 711 203 | www.hennlich.cz/meres

			•							Tab.1	Control unit rod material
				•						Tab.1	Process connection
					•					Tab.1	Electrical output
						•				Tab.1	Temperature class
							•			Tab.1	Sealing gasket
								•		Tab.2	Wiring
									•	Tab.1	Thermostat (on request)
										Tab.1-2	Cable length
KIT/S1.B45 PIPE			1000							Tab.1	Extension pipe length