



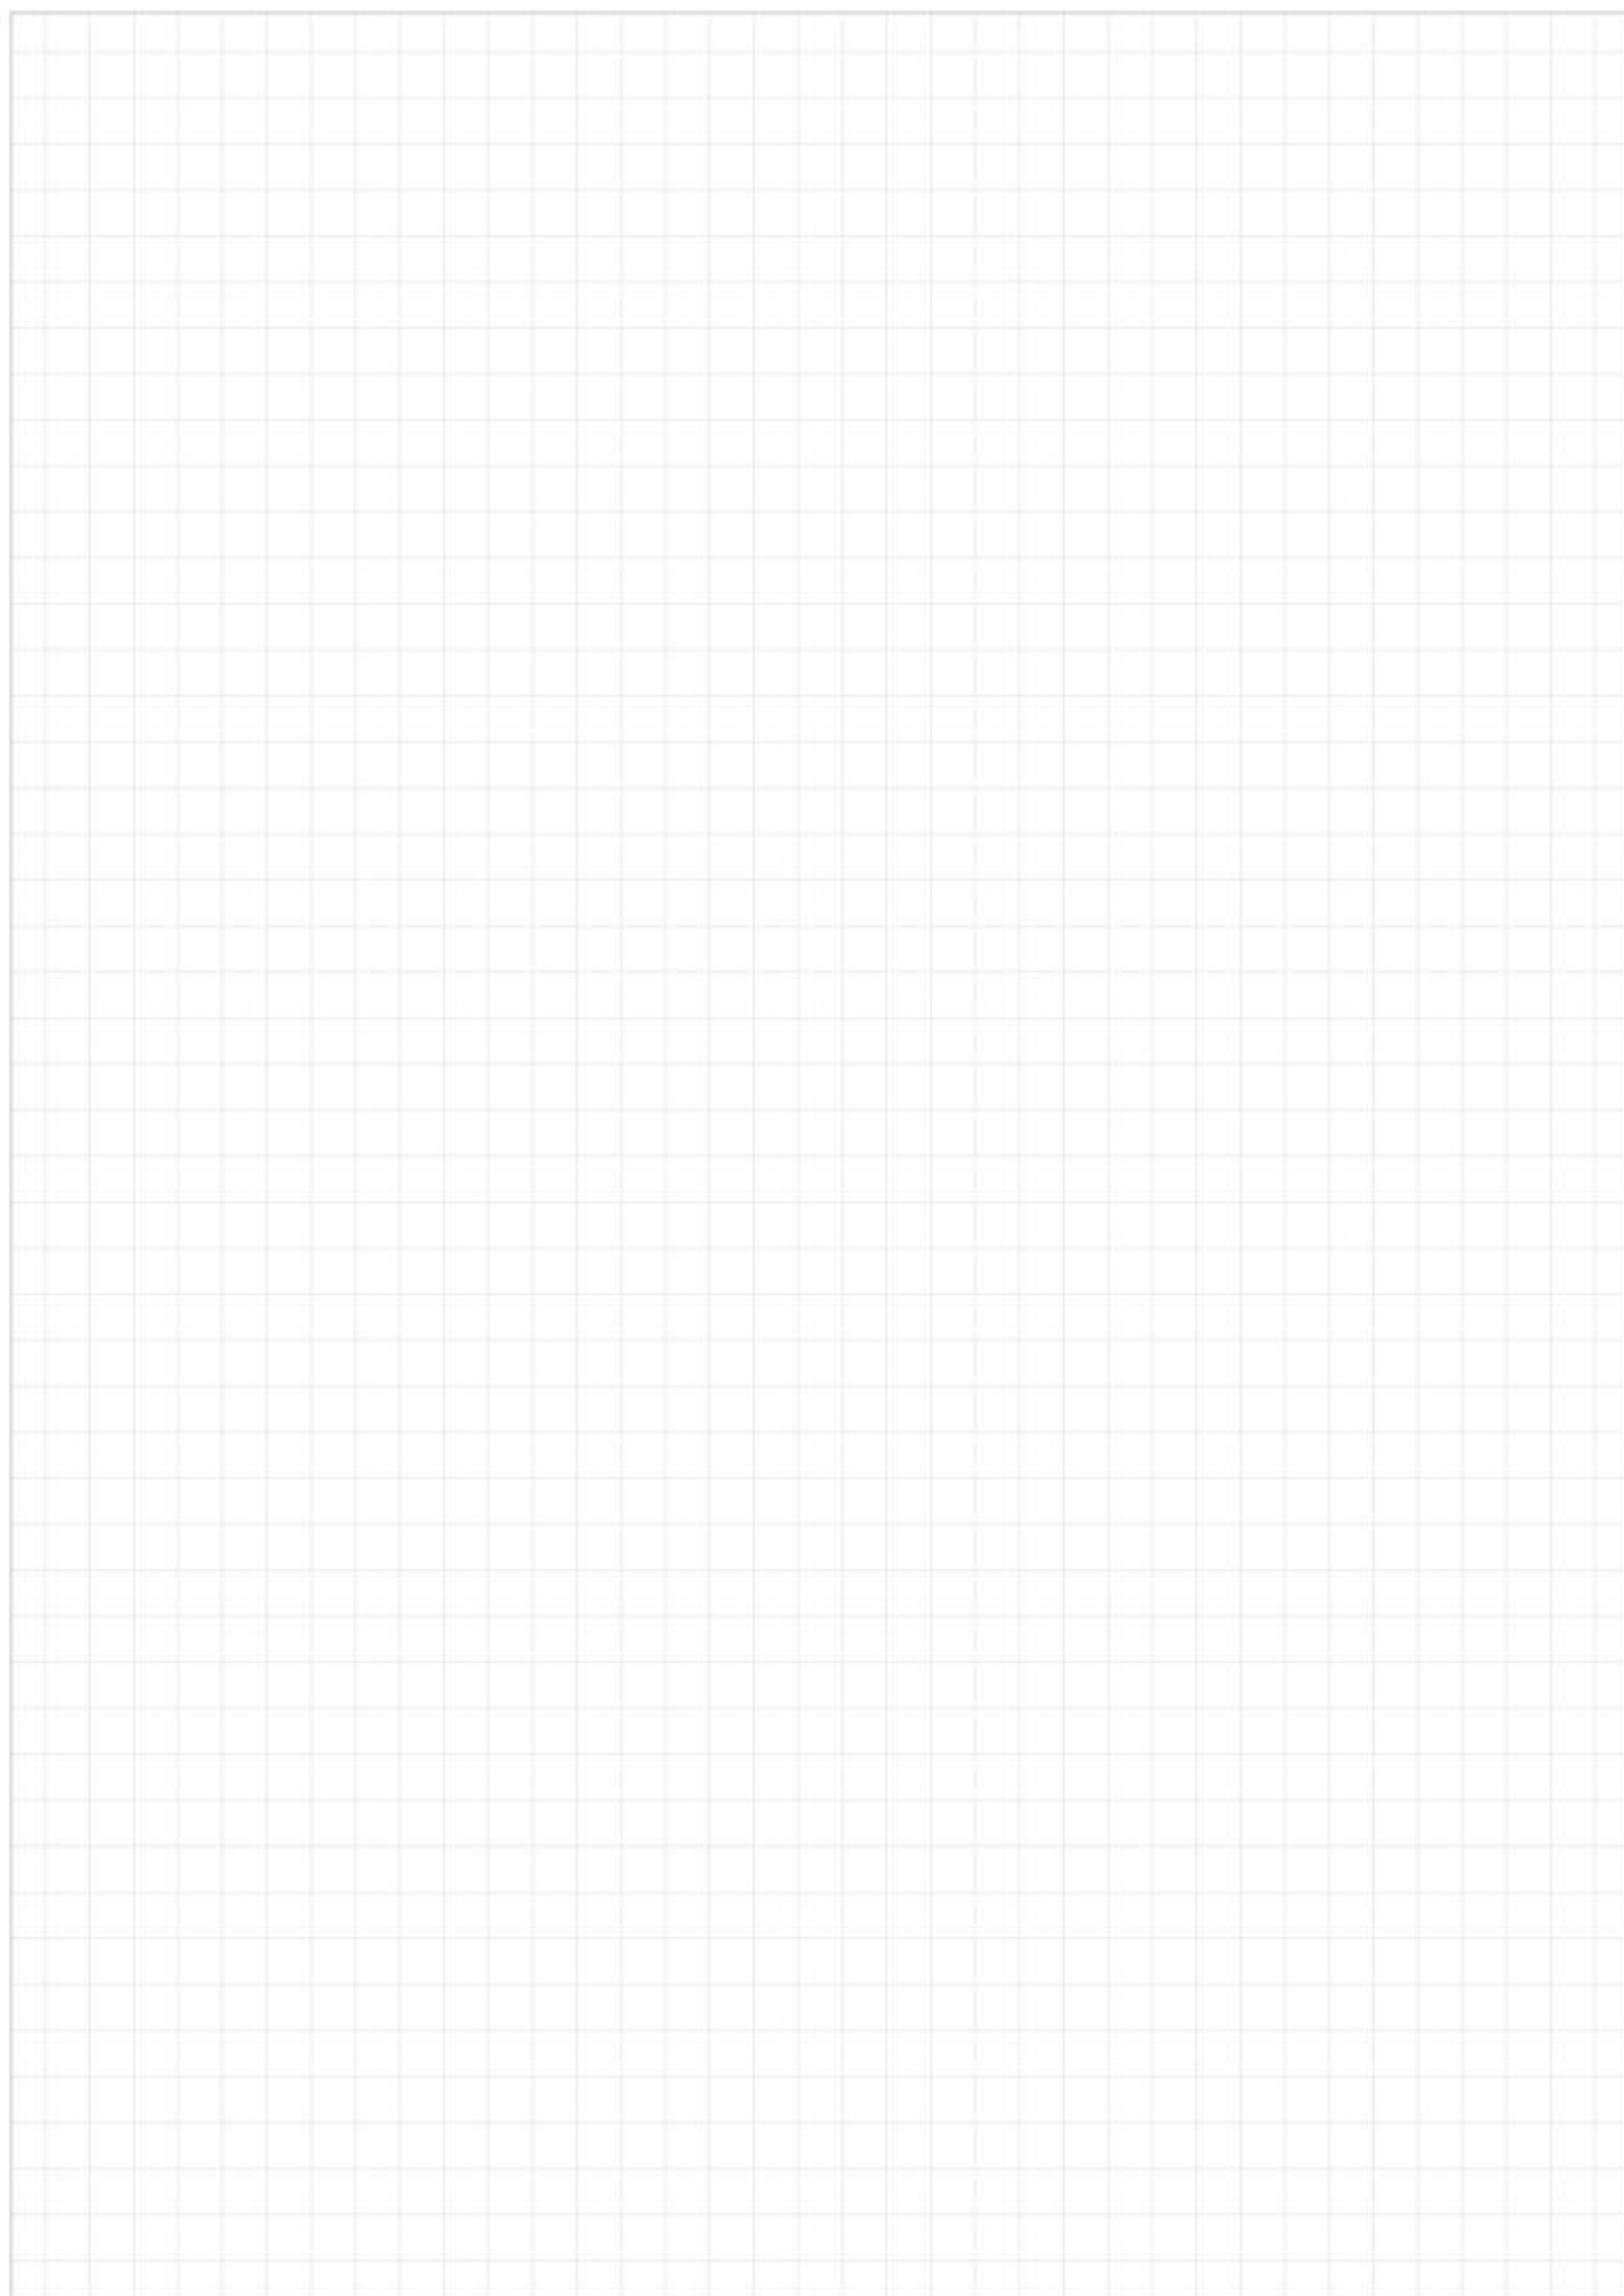

1174

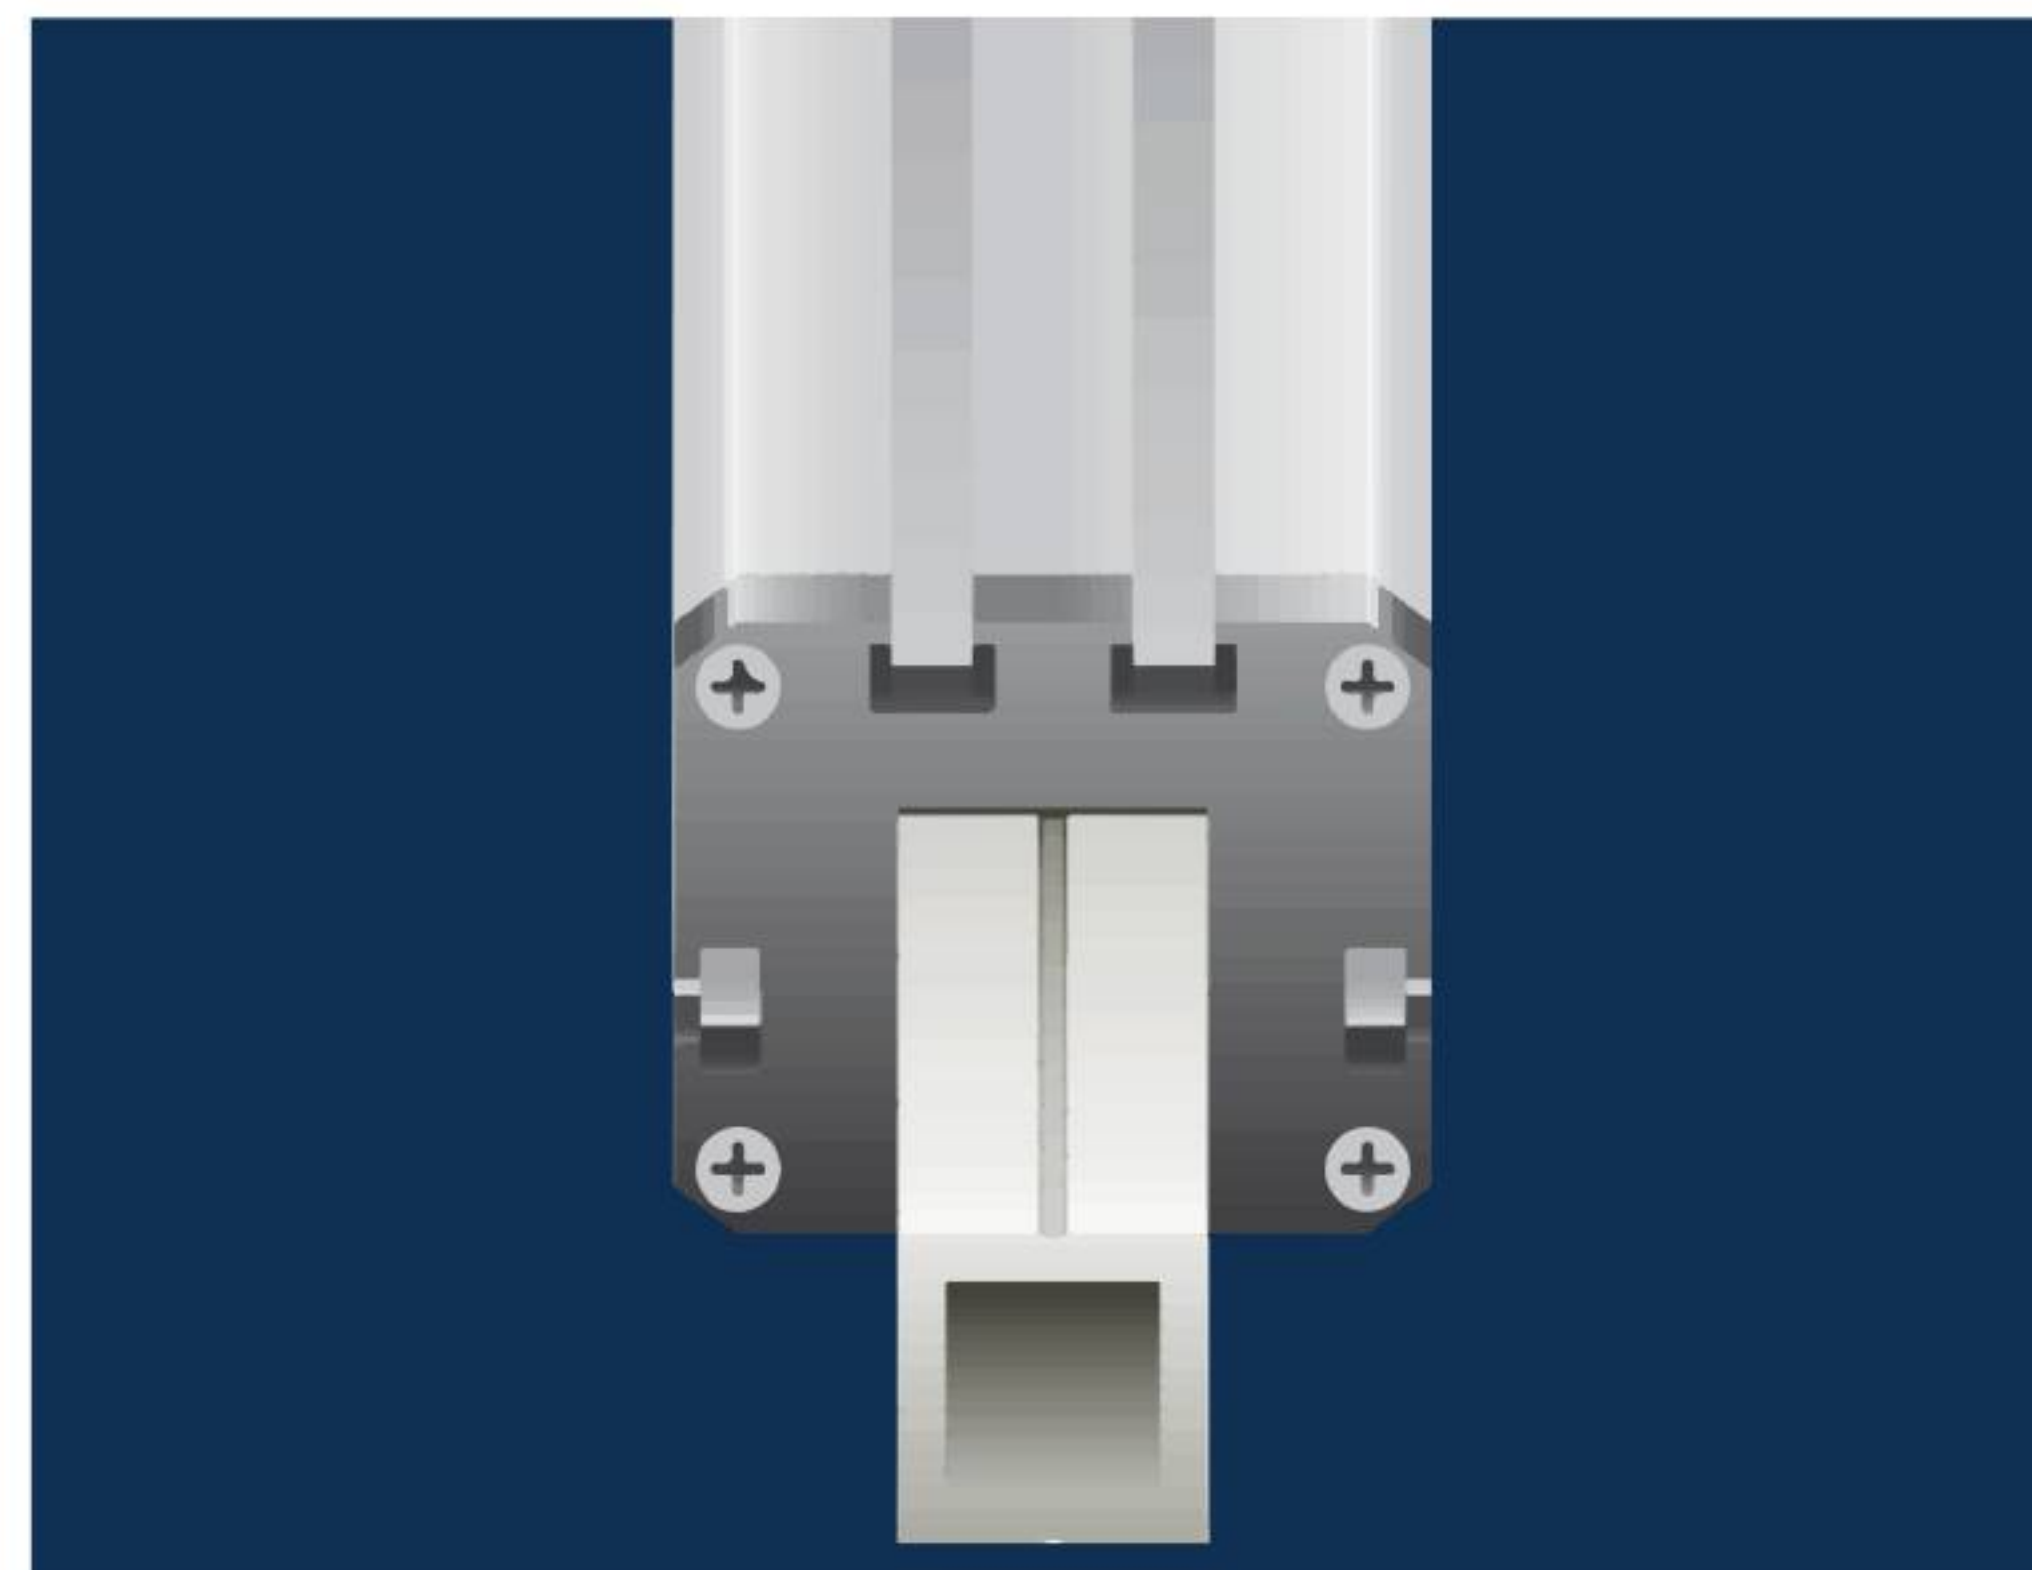

drylin® linear technology – drylin® Q square linear guides

Torque-resistant linear guides

Square section linear rail made from
hard-anodised aluminium

Apply moments up to 10Nm

Adjustable linear carriage with or without
manual clamp

Lubrication-free and lightweight



HENNLICH

LIN-TECH

**HENNLICH -
ŽIJEME TECHNIKOU**

o.z. LIN-TECH HENNLICH s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech

Lubrication-free square linear guides – drylin® Q

Linear movement with torque resistance, completely lubrication-free. The drylin® Q linear system offers the user maximum flexibility in the design. Individual housing options such as solid plastic bearings or adjustable housings with or without manual clamp are available. Due to the hollow design, the robust hard-anodised aluminium profile is very light and is suitable for the installation of supply cables. Options for mounting are extensive, among others, using slot nuts; installation size 20 can also be combined with all 20/20 aluminium profiles.

- 100% lubrication-free
- Torque-resistant
- Adjustable bearing clearance
- Applied forces from all directions possible
- Dirt resistance
- Low vibration and quiet
- Numerous mounting options

Typical application areas

- Mechanical engineering
- Wood working industry
- Machine tools
- Handling



Available from stock

Detailed information about delivery time online.



Price breaks online

No minimum order value. No minimum order quantity.



Max. +90°C
Min. -40°C



3 installation sizes (10/12/20)
Rail length: 1,500/3,000mm

Hollow rail for supply lines and magnetic tape

Profile made from hard-anodised aluminium

Torque-resistant square geometry

End cap made from solid plastic

Main body of the carriage made from clear anodised aluminium

Sliding elements made from high-performance polymer iglidur® J

Adjustable bearing clearance



Technical details on floating bearings, 2:1 Rule, tightening torque for drylin® metallic screws ► Page 963



Square section linear rails

- Material: aluminium, hard-anodised
 - Lightweight and corrosion-resistant
 - Hollow rail design for cables to feed-through
- Page 1178



Linear carriage

- Unsupported carriage version with/without manual clamp
 - Numerous fastening options on all sides via slot nuts
 - Bearing clearance adjustable
- Page 1179



Bearing housing

- Enclosed anodised aluminium housing
 - Apply moments up to 3Nm (size 10), 10Nm (size 20)
 - Torque-resistant sliding elements made from iglidur® J
- Page 1181



Sliding plates for clearance adjustment

- Tolerance compensation for profiles, including lifting columns
 - Adjustment mechanism included
 - Easy assembly
- Page 1185



Measuring systems
drylin® QKM
► Page 1187



Cantilever axis
drylin® GRQ miniature linear module
► Page 1443



Order key

Type Size Option


AW M Q - 10 - 1000

Aluminium shaft	Metric	Square design	Installation size	Length [mm]
-----------------	--------	---------------	-------------------	-------------



Minimum saw lengths

► Page 961

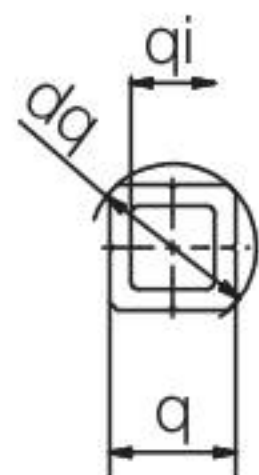

Dimensions [mm]


Part No.	Weight [kg/m]	q	dq	qi ±0.02	Max. length
AWMQ-10	0.082	7.5	10	5	1,500
AWMQ-12	0.193	12	16	8.5	1,500
AWMQ-20	0.46	20	25	15	3,000

Accessories

Shaft end supports made from plastic




- Cost-effective mounting option
- Can also be used as floating bearing

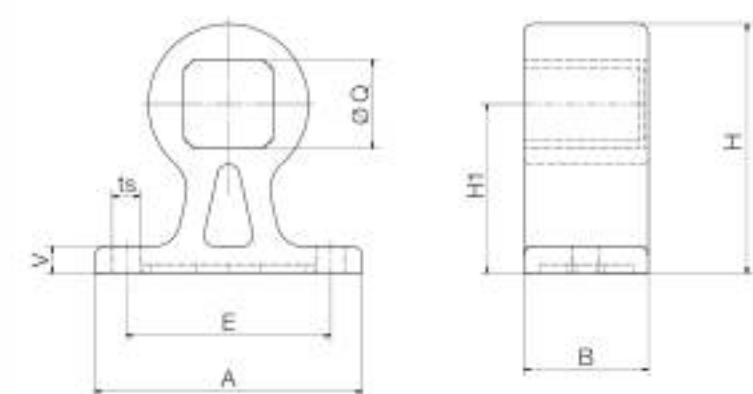

Dimensions [mm]

Part No.	A	H	B	Q	H1	E	ts	V
STZ-Q10-01-FL	30	21	14	7.5	14	20	3.3	3
STZ-Q20-01-FL	60	56	28	20	38	46	6.2	6

End caps for square section linear rail

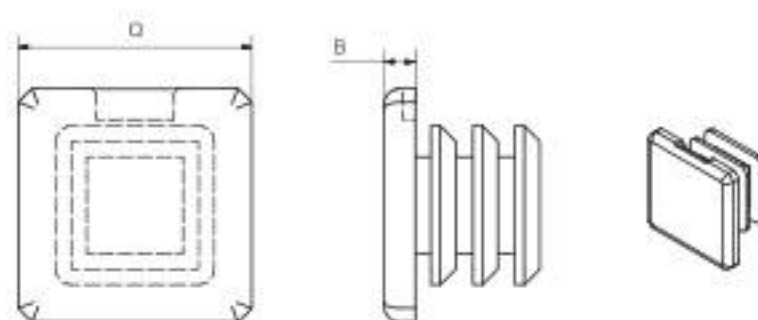

Dimensions [mm]

Part No.	Q	B
STZ-Q10-01-C	7.5	1
STZ-Q20-01-C	20	5



1178 Online tools and more information ► www.igus-asean.com/drylinQ

Order key

Type Size

Q W E - 01 - 20

Square	Linear carriage	Adjustable	Standard design	Installation size
--------	-----------------	------------	-----------------	-------------------

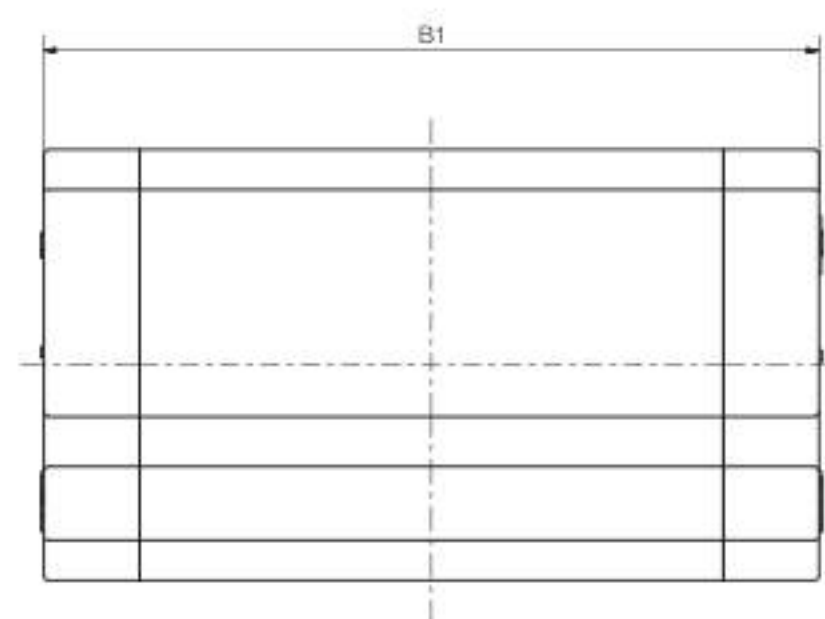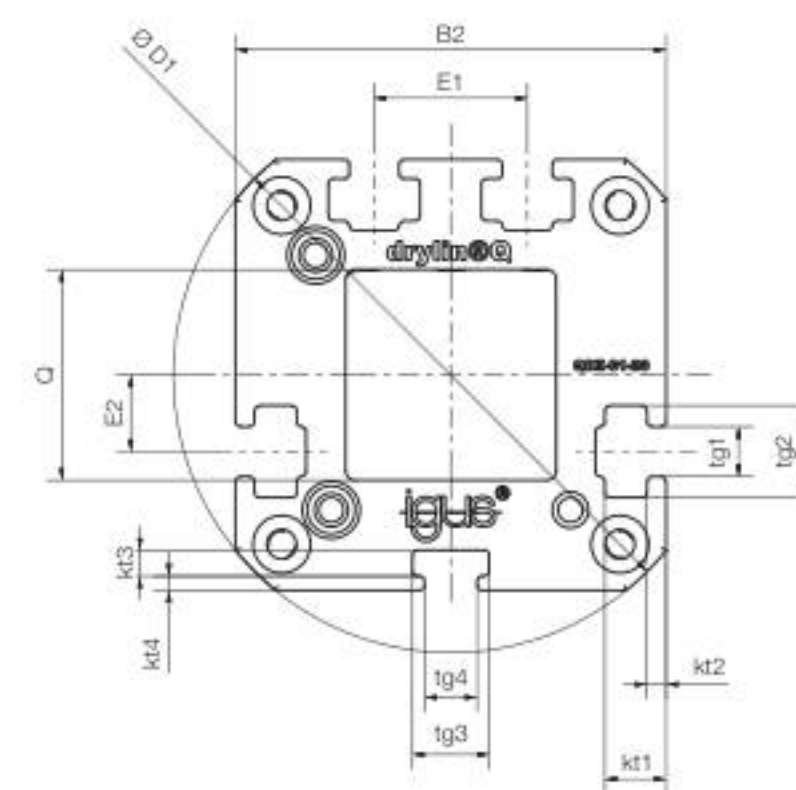

Dimensions [mm]

Part No.	Weight [g]	M max. [Nm]	B1	B2 h7	D1	Q	E1	E2	tg1	tg2	tg3	tg4	kt1	kt2	kt3	kt4
QWE-01-12	110	5	80	34	44	12	12	6	5.5	8	8	—	—	—	3	1.25
QWE-01-20	210	10	81	45	58	20	16	8	5.5	9.6	8	5.5	6.4	2	2.7	1.5

Accessories: Slot nuts



Slot nuts offers attachment options (for example sensors) on four sides of the housing. 8 pieces are included in the delivery of a QWE carriage.
Part No.: **NOR-20602**

Can be combined with:



AWMQ-12



AWMQ-20

3D CAD files, prices and delivery time online ► www.igus-asean.com/drylinQ 1179





Order key

Type Size Options

Q W E - 01 - 20 - HKA

Square	Linear carriage	Adjustable	Standard design	Installation size	Manual clamp

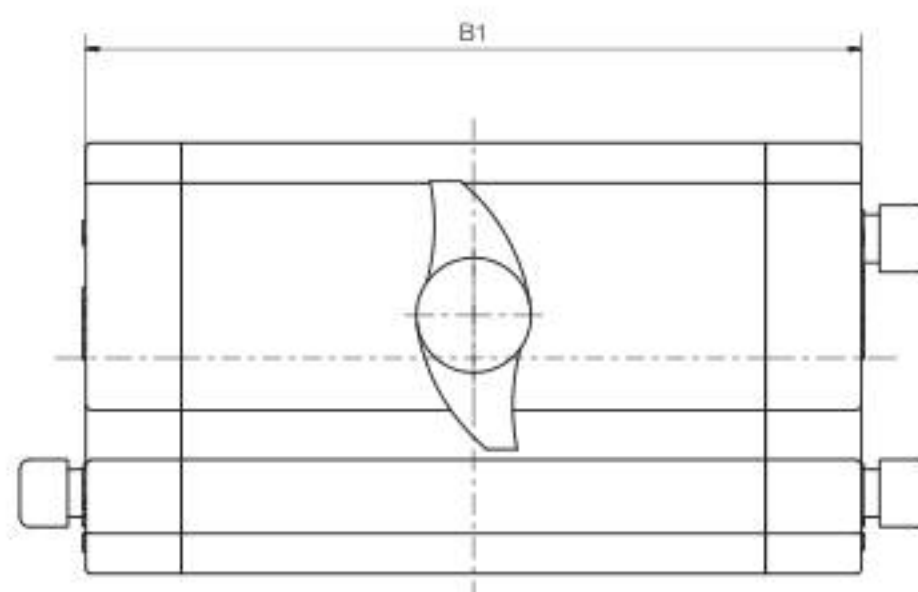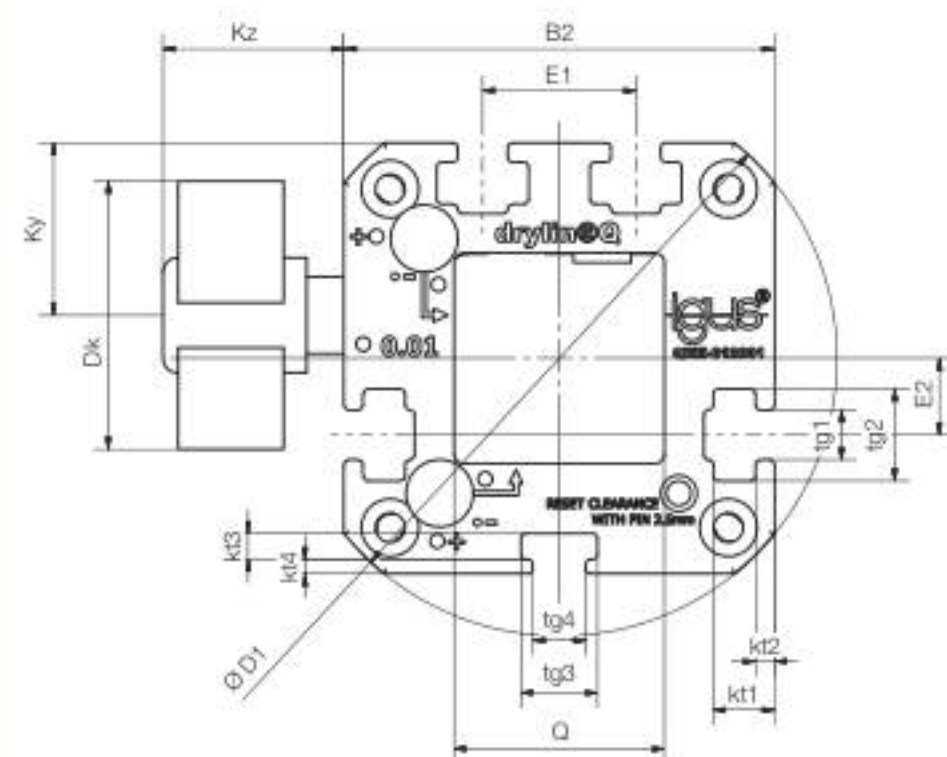

Dimensions [mm]

Part No.	Weight [g]	M max. [Nm]	B1	B2 h7	D1	Q	E1	E2	tg1	tg2	tg3	tg4
QWE-01-12-HKA	—	—	80	34	44	12	12	6	5.5	8	8	—
QWE-01-20-HKA	215	10	81	45	58	20	16	8	5.2	9.6	8	5.5

Part No.	kt1	kt2	kt3	kt4	Dk	Ky	Kz
QWE-01-12-HKA	—	—	3	1.25	18	14	19
QWE-01-20-HKA	6.4	2	2.7	1.5	28	18	19



The manual clamp thread was developed for simple tasks. The creep behaviour of the clamped plastic causes a reduction in clamping force over time (up to 70%). Therefore no safety-relevant parts may be clamped. Please contact our technical consultant, if you require other options for the clamping.

Can be combined with:



AWMQ-20

1180 Online tools and more information ► www.igus-asean.com/drylinQ

Order key


Type Size

Q J R M T - 05 - 20


Square	iglidur® J	Closed design	Metric	Tandem (optional)	Compact design	Installation size



QJRM-05-20

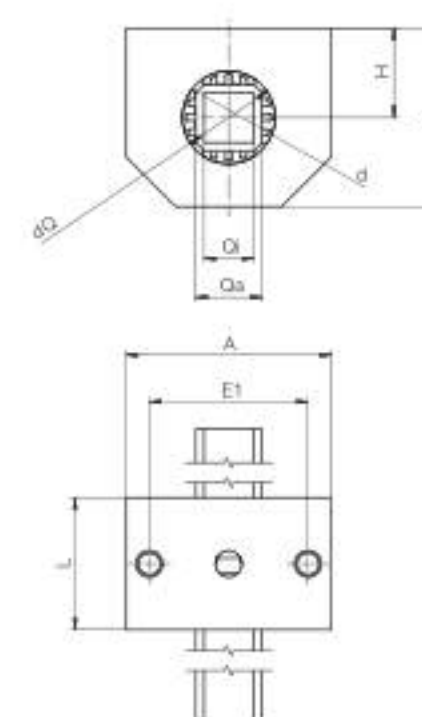

QJRMT-05-20

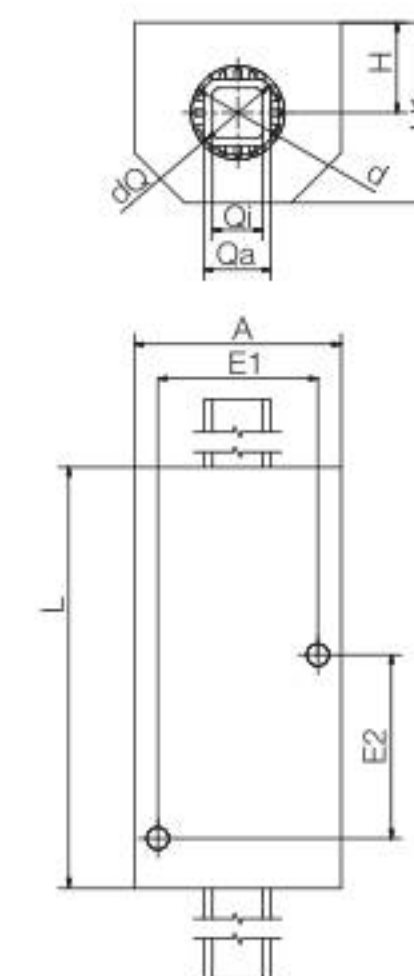

Technical data [mm]

Part No.	Weight [kg]	Mx [Nm]	Surface pressure	
			dynamic [N]	static [N]
QJRM-05-20	0.25	5	1,500	10,500
QJRMT-05-20	0.55	10	1,500	10,500

Dimensions [mm]

Part No.	A	H ±0.02	H1	dQ	Qa	Qi	E1 ±0.15	E2 ±0.15	d	L
QJRM-05-20	62	27	54	25	20	15	48	—	28	40
QJRMT-05-20	62	27	54	25	20	15	48	55	28	85

Can be combined with:



AWMQ-20

3D CAD files, prices and delivery time online ► www.igus-asean.com/drylinQ 1181

HENNLICH

LIN-TECH

HENNLICH -
ŽIJEME TECHNIKOU

o.z. LIN-TECH HENNLICH s.r.o.
Českolipská 9, 412 01 Litoměřice

Telefon: +420 416 711 333
E-mail: lin-tech@hennlich.cz

www.hennlich.cz/lin-tech



QJFM-02-...



QJFMT-01-...




Order key


Type	Option	Size
Q J F M T - 02 - 10		
Square	iglidur® J	With flange
		Metric
		Tandem (optional)
		Design
		Installation size

Options:
01 =
Round flange
02 =
Square flange


QJFM-01

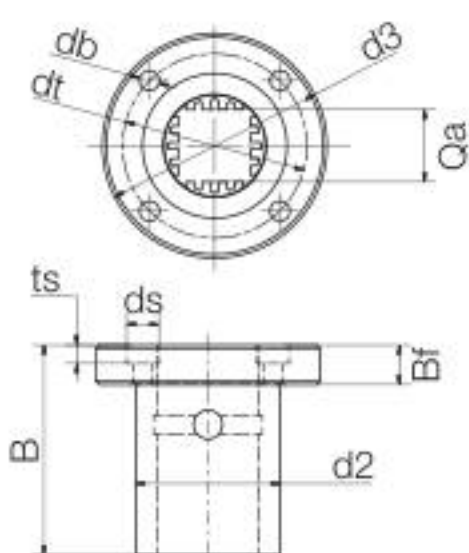


QJFM-02

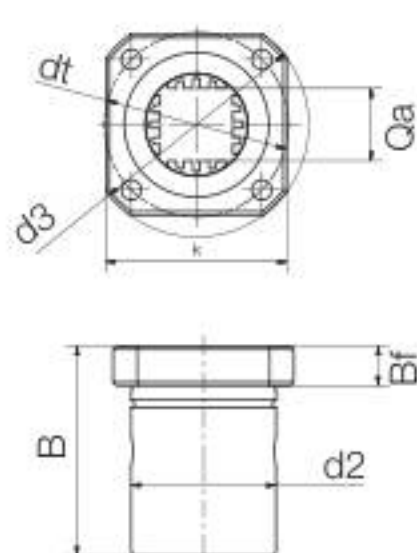

QJFMT-01

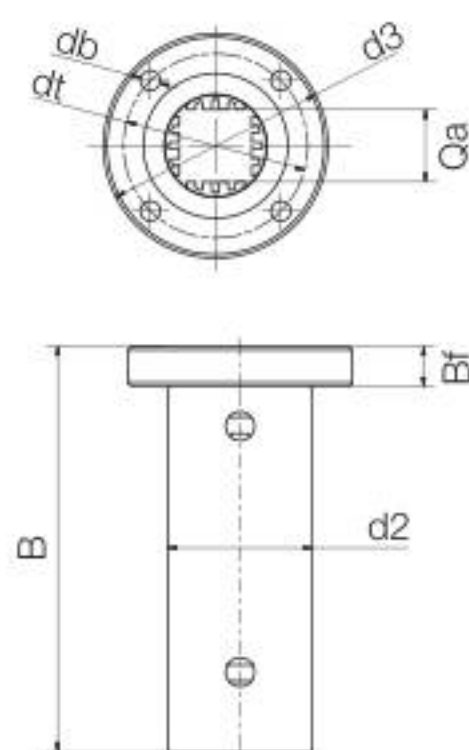

QJFMT-02

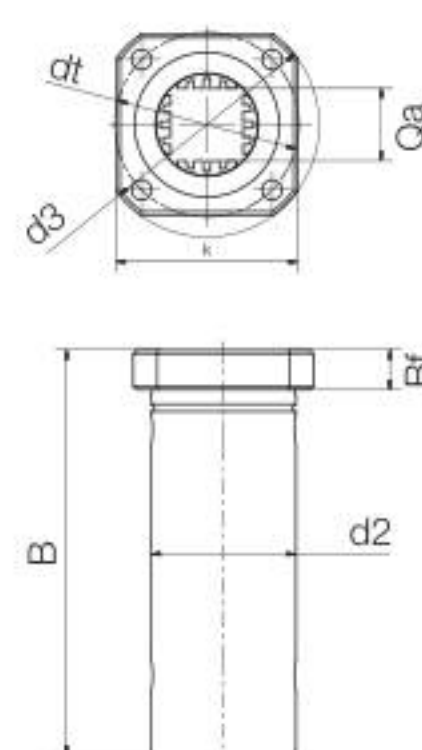

Technical data and dimensions [mm]

Part No.	Weight [kg]	Surface pressure		Mx [Nm]
		dynamic [N]	static [N]	
QJFM-01-20	0.14	1,500	10,500	5
QJFM-02-20	0.14	1,500	10,500	5
QJFMT-02-10	0.038	–	–	3
QJFMT-01-20	0.24	1,500	10,500	10
QJFMT-02-20	0.24	1,500	10,500	10

Part No.	k	d2 h7	Bf	Qa	d3 ±0.15	dt ±0.15	B	db	ds	ts
QJFM-01-20	–	40	11	20	62	51	58	5.5	9.0	5.1
QJFM-02-20	50	40	11	20	62	51	58	5.5	9.0	5.1
QJFMT-02-10	30	19	9	7.5	39	29	52	4.5	7.5	4.1
QJFMT-01-20	–	40	11	20	62	51	112	5.5	9.0	5.1
QJFMT-02-20	50	40	11	20	62	51	112	5.5	9.0	5.1

Can be combined with:



AWMQ-10




AWMQ-20

1182 Online tools and more information ► www.igus-asean.com/drylinQ

Order key

Type	Size
Q J R M P - 01 - 10	
Square	iglidur® J
	Closed design
	Metric
	Solid plastic
	Standard design
	Installation size

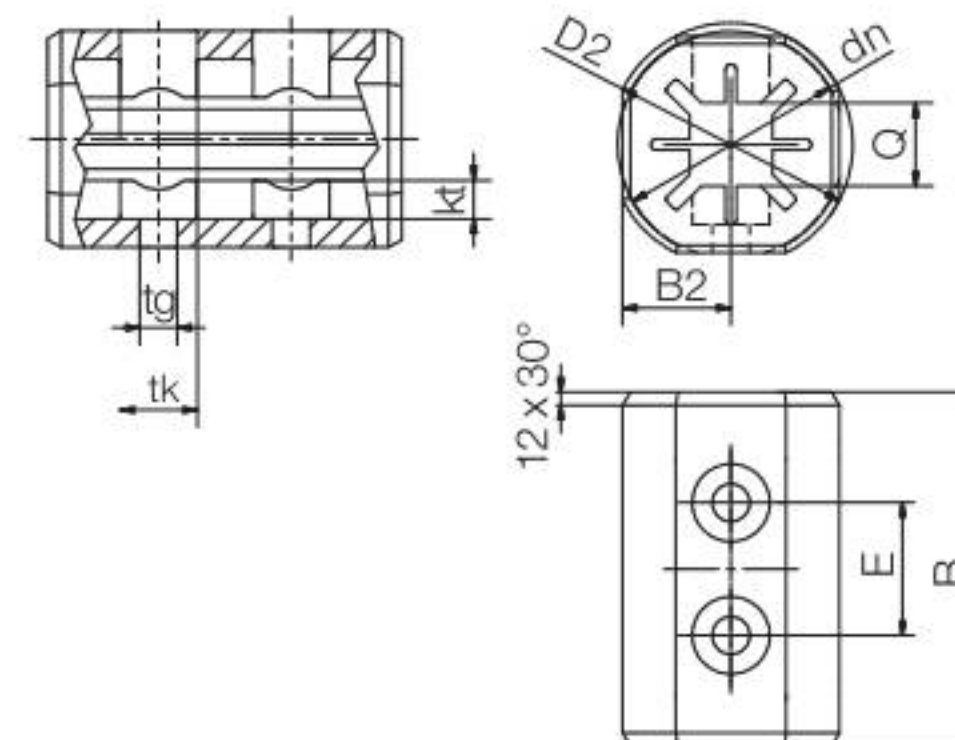

Manual clamp available.
Suffix "-HKA"

Dimensions [mm]

Part No.	Weight [g]	M max. [Nm]	B	B2	D2	dn	E	Q	tk	tg	kt
QJRMP-01-10	11.3	3	32	9.8	22	22	12	7.5	6	3.4	3.5



Pipette unit equipped with drylin® Q
square linear guide combined with
drylin® GRW cantilever axis and NEMA
stepper motor

Can be combined with:



AWMQ-10

3D CAD files, prices and delivery time online ► www.igus-asean.com/drylinQ 1183



- Hollow rail for supply lines (compressed air, cable)
- Small space requirement
- A host of possible applications

Single components



Adapter for flange shaft
block

Part No.
STZ-Q10-AR-1012-16



Adapter kit e.g. for
grippers/sensors

Part No.
STZ-Q10-01-AM



Plastic shaft
end supports

Part No.
STZ-Q10-01-FL
STZ-Q10-01-LL



Chain connection
for e-chain® E2 micro

Part No.
STZ-Q10-01-AC-E2



End caps for square-
section rail

Part No.
STZ-Q10-01-C
STZ-Q20-01-C



- Clearance-reduced guidance of the lifting columns by adjustment mechanism
- Low-cost due to injection moulding
- Lightweight solid plastic solution
- Lubrication-free, wear-resistant, maintenance-free due to dry-tech® polymer iglidur® J
- Corrosion-free




Order key

Type Option Size

ASD J - 28 - 025

Type	Option	Size
iglidur® J	Width B	Installation size

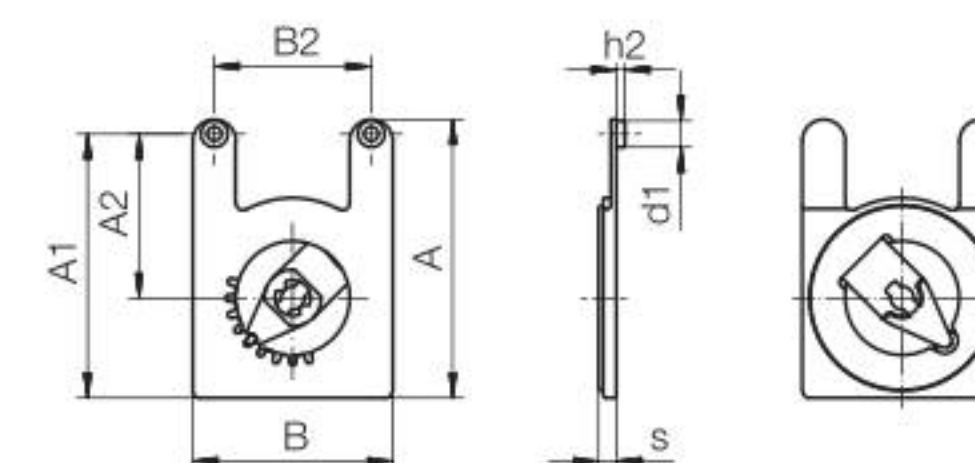

Dimensions [mm]

Part No.	Weight [g]	s	A	B	A1	A2	B2	d1	h2
ASDJ-28-025 New	1.9	Min. 2.2 Max. 2.8	39	28	37	23	±0.15	-0.1	±0.1



Adjustment key Part No.
ASDZ-012817

