

Cleaning lance FlexLance




Features:

- Stroke length: 1 mm to 2,700 mm
- Material: contact with process
1.4404 (316L), PTFE and EPDM
- Tank cleaning nozzle connection by
means of EN 10226 R 3/4 thread
- Driven pneumatic rodless cylinder
- Position monitoring possible (optional)
- Sealed by rod seal on process side
- Process-side flange EN 1092-1
DN 100 PN 16
- Process-side components are
food-compliant



Extendable cleaning lance

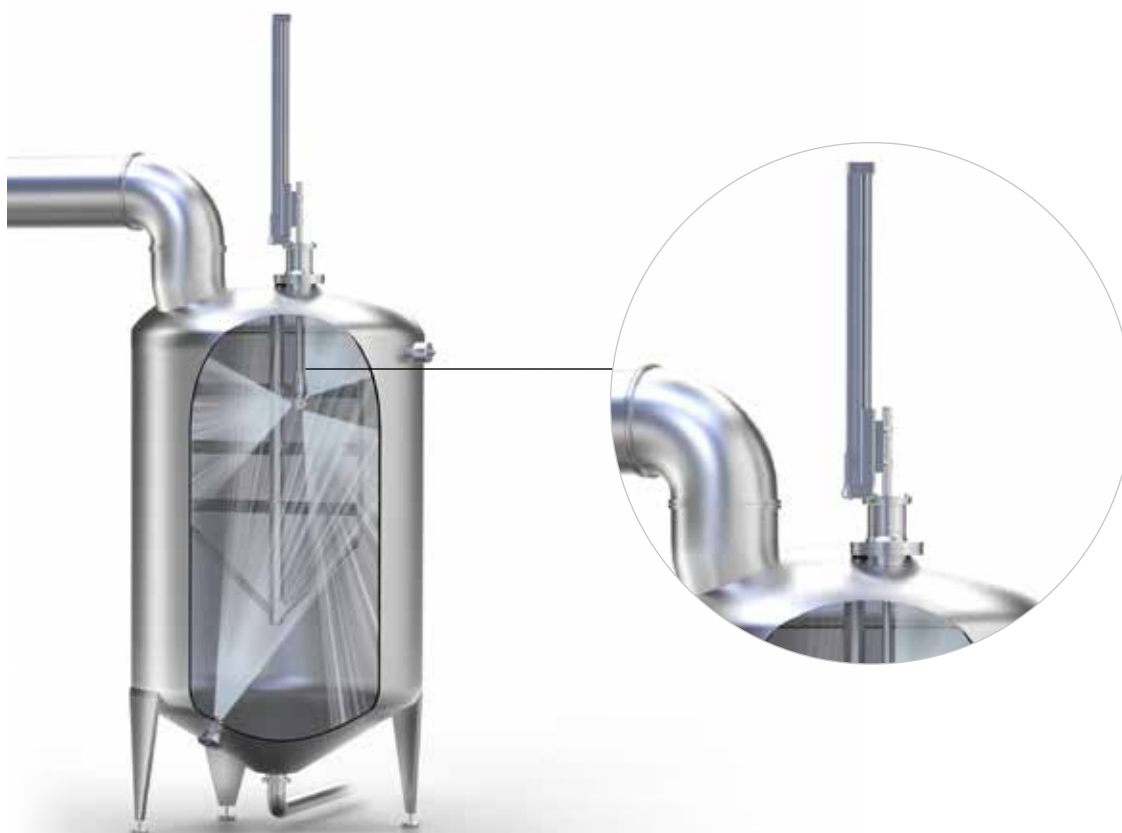

Good to know

In some processes, the tank cleaning nozzle must not remain in the tank during the process. Lechler offers pneumatically extendable cleaning lances so that the tank cleaning nozzle is only in the tank when it is used for cleaning. We will be pleased to discuss your requirements. By phone on +49 7123 962-0 or by email at info@lechler.de.

CONTACT: Lechler GmbH · Ulmer Strasse 128 · 72555 Metzingen, Germany · Phone +49 7123 962-0 · ind@lechler.de · www.lechler.com

