


P10

10 mm COMPACT valves - threaded body and for sub-base mounting 90° ELECTROPILOT CONNECTION

- Standard consumption: 1 W; upon request low power consumption: 0,3W
- Quick response times
- High flow rate: the development of the traditional UNIVER spool technology permits high flow rate values
- Compact design: the valve body (10mm) allows reduced overall dimensions
- Complete solution
- Threaded body (P10F) and body for sub-base (P10B) in the following versions: 5/2 - 5/3 - 3/2+3/2
- External and multipolar electrical connections
- TC serial transmission system
- Maximum application flexibility
- Modular sub-base (single and double) for a high versatility in the composition of the valve manifolds
- Simplified installation
- Easy installation of tubes and fittings thanks to connections being all on the same side

Available ATEX version upon request

CE II 3 GD c nA II T5 - 10°C ≤ Ta ≤ 45°C

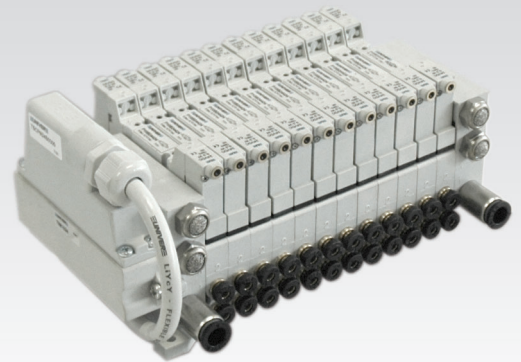

TECHNICAL CHARACTERISTICS

Ambient temperature	-5 ÷ +50 °C
Fluid temperature	Max +50 °C
Fluid	10 µm filtered air, with or without lubrication
Commutation system	spool
Ways/Positions	3/2+3/2, 5/2, 5/3
Pressure	7 bar (electric control) 10 bar (pneumatic control)
Control	indirect electro-pneumatic, pneumatic
Return	mechanical spring, pneumomechanical spring, pneumatic, electric
Connections	M5 (P10F) - M5, M7, tube Ø 4 (P10B)
Nominal flow rate (NI/min)	310 (5/2) 230 (5/3) 250 (3/2+3/2)

CONSTRUCTIVE CHARACTERISTICS

Valve body	zamak
Seals	nitrile rubber (NBR)
Sub-base and actuators	selfextinguishing technopolymer
Spool	aluminum

ELECTRIC CHARACTERISTICS

Electropilot	B10 (0,3 W) B11 (1 W)
Voltage	24 V DC (± 10%)
Power consumption	B10 = 0,3 W, speed -up 1 W (25 ms) B11 = 1 W
Protection degree	IP65
Manual override	recessed button - 1 position

CODIFICATION KEY

P	1	0	F	2	4	4	2	4		
	1			2	3	4	5	6	7	


1 Series P10F = threaded body P10B = body for sub-base	2 Type 2 = 5/2 3 = 5/3 c.c. 4 = 5/3 o.c. 5 = 5/3 p.c. 6 = 3/2+3/2 NC-NC 7 = 3/2+3/2 NC-NO 8 = 3/2+3/2 NO-NO	3 Control 14 3 = pneumatic amplified 4 = electric amplified 90° (0,3W) 6 = electric amplified 90° (1W)	4 Return 12 0 = pneumomechanical spring 1 = mechanical spring 3 = pneumatic amplified 4 = electric amplified 90° (0,3W) 6 = electric amplified 90° (1W)
---	---	--	---

5 Voltage 24 = 24 V DC	6 Variant D = external pilot supply on valve body (P10 = M3)	7 ATEX option X = Atex (upon request)
----------------------------------	--	---


See ATEX Catalogue for types and versions

o.c. = open centres c.c. = closed centres p.c. = pressurized centres

Version with in-line connections (upon request)


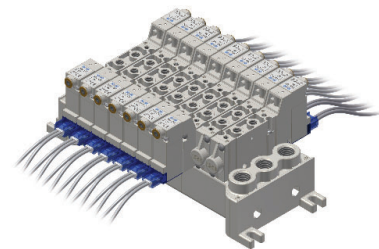


Single electric impulse

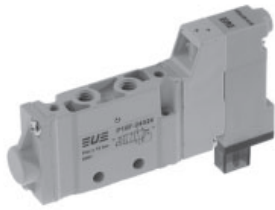

Weight (Kg): 0,054


	Symbol	Control	Return	Pressure bar	Resp. Time (ms)		Part no.
					14	12	
5/2		electric amplified	pneumo mechanical spring	1,5÷9	12	20	P10F24024 P10F26024
5/2		electric amplified	mechanical spring	1,9÷9	10	21	P10F24124 P10F26124

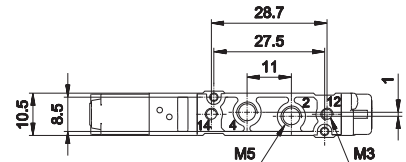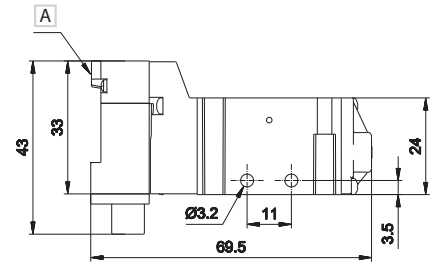

A Manual override



2 - 4 = Use
14 = Control
12 = Return

Double electric impulse



Weight (Kg): 0,069

	Symbol	Control	Return	Pressure bar	Resp. Time (ms)		Part no.
					14	12	
5/2		electric amplified	electric amplified	0,7÷9	10	10	P10F24424 P10F26624
5/3 c.c.		electric amplified	electric amplified	1,5÷9	11	22	P10F34424 P10F36624
5/3 o.c.		electric amplified	electric amplified	1,5÷9	11	22	P10F44424 P10F46624
5/3 p.c.		electric amplified	electric amplified	1,5÷9	11	22	P10F54424 P10F56624
3/2 NC + 3/2 NC		electric amplified	electric amplified	1,3÷9	9	14	P10F64424 P10F66624
3/2 NC + 3/2 NO		electric amplified	electric amplified	1,3÷9	9	14	P10F74424 P10F76624
3/2 NO + 3/2 NO		electric amplified	electric amplified	1,3÷9	9	14	P10F84424 P10F86624

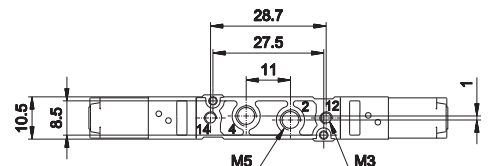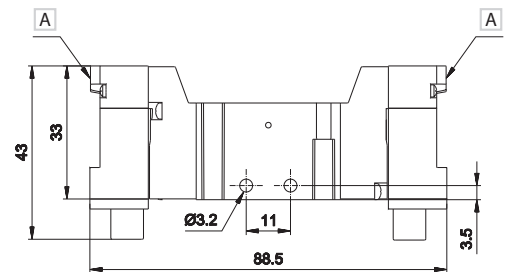

A Manual override

2 - 4 = Use
14 = Control
12 = Return

o.c. = open centres c.c. = closed centres p.c. = pressurized centres


3

Single pneumatic impulse



Weight (Kg): 0,042

	Symbol	Control	Return	Pressure bar	Resp. Time (ms)		Part no.
					En.	De-en.	
5/2		pneumatic amplified	pneumo mechanical spring	1,5÷10	8	14	P10F230
5/2		pneumatic amplified	mechanical spring	1,9÷10	7	16	P10F231

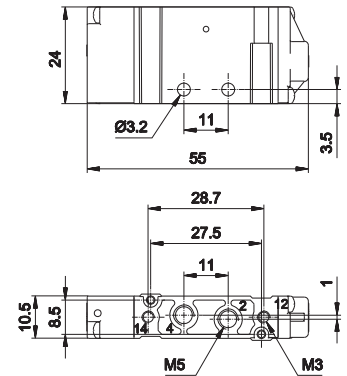


2 - 4 = Use
14 = Control
12 = Return

Double pneumatic impulse



Weight (Kg): 0,044



	Symbol	Control	Return	Pressure bar	Resp. Time (ms)		Part no.
					En.	De-en.	
5/2		pneumatic amplified	pneumatic amplified	0,6÷10	6	6	P10F233
5/3 c.c.		pneumatic amplified	pneumatic amplified	1,5÷10	7	20	P10F333
5/3 o.c.		pneumatic amplified	pneumatic amplified	1,5÷10	7	20	P10F433
5/3 p.c.		pneumatic amplified	pneumatic amplified	1,5÷10	7	20	P10F533
3/2 NC + 3/2 NC		pneumatic amplified	pneumatic amplified	1,3÷10	8	14	P10F633
3/2 NC + 3/2 NO		pneumatic amplified	pneumatic amplified	1,3÷10	8	14	P10F733
3/2 NO + 3/2 NO		pneumatic amplified	pneumatic amplified	1,3÷10	8	14	P10F833

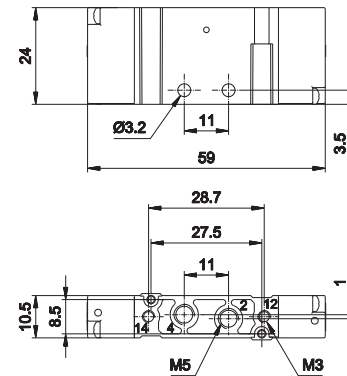


2 - 4 = Use
14 = Control
12 = Return

o.c. = open centres c.c. = closed centres p.c. = pressurized centres

Integrated electric connection

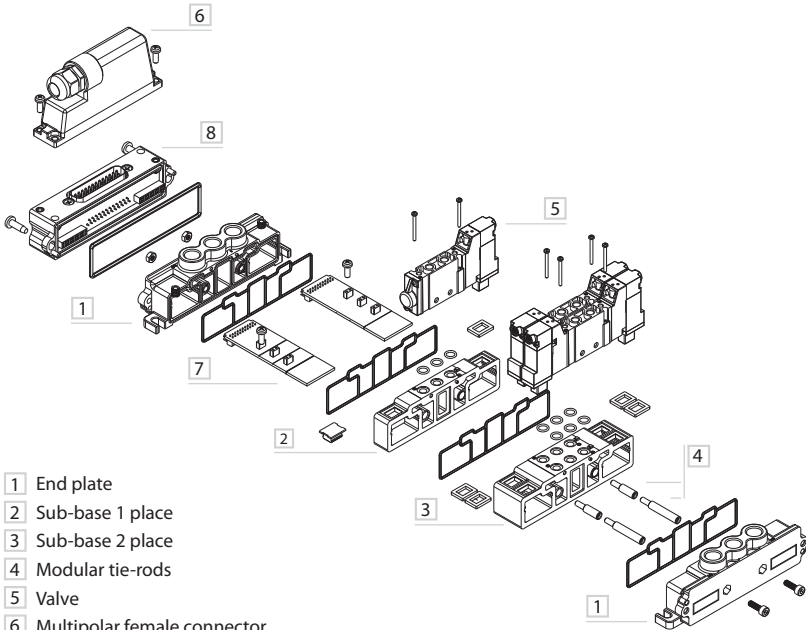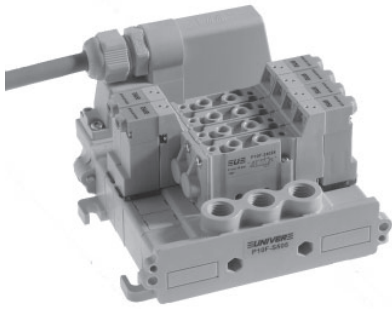

- 1 End plate
- 2 Sub-base 1 place
- 3 Sub-base 2 place
- 4 Modular tie-rods
- 5 Valve
- 6 Multipolar female connector
- 7 Bus connection card
- 8 Multipole connection module

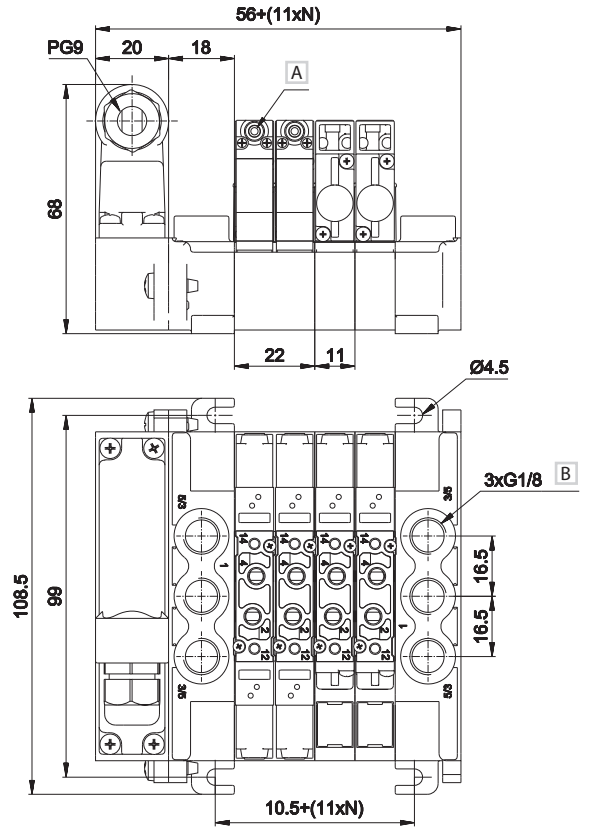

- 1 = Supply port
 - 2 - 4 = Use
 - 3 - 5 = Exhaust
 - 14 = Control
 - 12 = Return
- N = Number of valve places
- A Manual override
 - B Tightening torque
G1/8 = max 3 Nm

TIM1024 P10SF100 P10SF110 P10SF200 P10SF210 P10SF500

connection module 25 poles male type D-sub weight: 0,047 Kg	sub-base 1 place weight: 0,018 Kg	sub-base 1 place 1-3-5 closed weight: 0,02 Kg	sub-base 2 places weight: 0,04 Kg	sub-base 2 places 1-3-5 closed weight: 0,04 Kg	supply plate G1/8 left for TIM module weight: 0,04 Kg

P10SF505 P10SF550 P10SF560 P10SF570 P10SS14M P10SS12**M**





supply plate G1/8 right weight: 0,04 Kg	supply pressure separator plate weight: 0,002 Kg	covering plate for unused valve place weight: 0,003 Kg	intermediate supply plate for threaded version weight: 0,004 Kg	bus connection card, side 14 ** = 04, 06, 08, 10, 12 places weight: 0,006 Kg	bus connection card, side 12 ** = 04, 06, 08, 10, 12 places weight: 0,006 Kg

P10STR01 P10STR02 P10STR05

modular tie-rods 1 valve place (package 100 pcs.) weight: 0,001 Kg	modular tie-rods 2 valve places (package 100 pcs.) weight: 0,003 Kg	modular tie-rods 5 valve places (package 100 pcs.) weight: 0,007 Kg

- AZ4-SN003A**
100 nuts M3 for tie-rods
- AZ4-VN0310**
100 screws for tie-rods

Electric connection with external connector

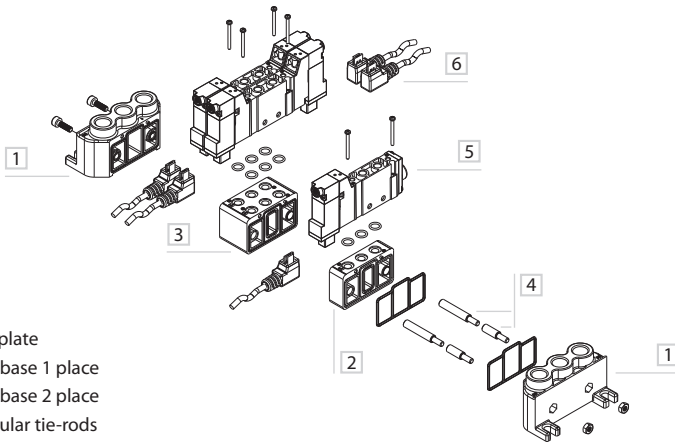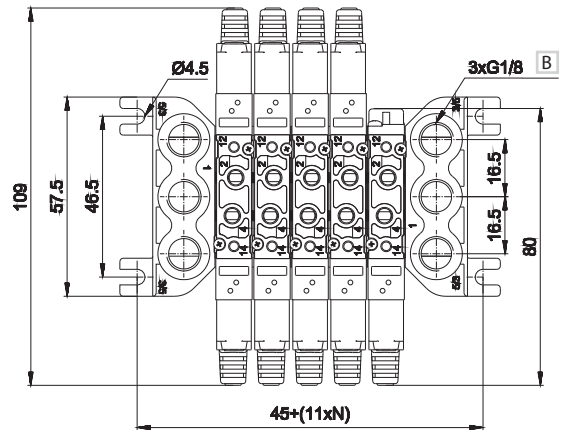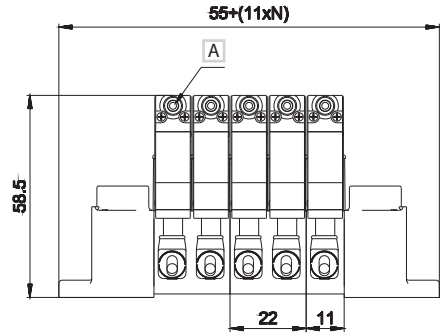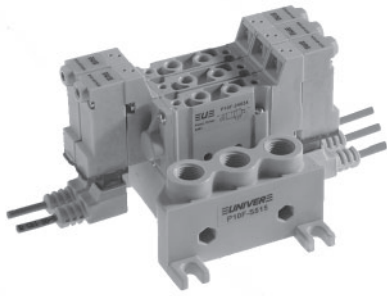

- 1 End plate
- 2 Sub-base 1 place
- 3 Sub-base 2 place
- 4 Modular tie-rods
- 5 Valve
- 6 Single connection



- 1 = Supply port
- 2 - 4 = Use
- 3 - 5 = Exhaust
- 14 = Control
- 12 = Return

- A Manual override
- B Tightening torque
G1/8 = max 3 Nm

N = Number of valve places

P10SF300	P10SF310	P10SF400	P10SF410	P10SF515	P10SF550
sub-base 1 place weight: 0,011 Kg	sub-base 1 place 1-3-5 closed weight: 0,013 Kg	sub-base 2 places weight: 0,024 Kg	sub-base 2 places 1-3-5 closed weight: 0,026	supply place G1/8 right/left weight: 0,032 Kg	supply pressure separator plate weight: 0,003 Kg
P10SF560	P10SF570	P10STR01	P10STR02	P10STR05	
covering plate for unused valve place weight: 0,003 Kg	intermediate supply plate for threaded version weight: 0,004 Kg	modular tie-rods 1 valve place (package 100 pcs.) weight: 0,001 Kg	modular tie-rods 2 valve places (package 100 pcs.) weight: 0,003 Kg	modular tie-rods 5 valve places (package 100 pcs.) weight: 0,007 Kg	
					AZ4-SN003A 100 nuts for tie-rods
					AZ4-VN0310 100 screws for tie-rods

Single electric impulse

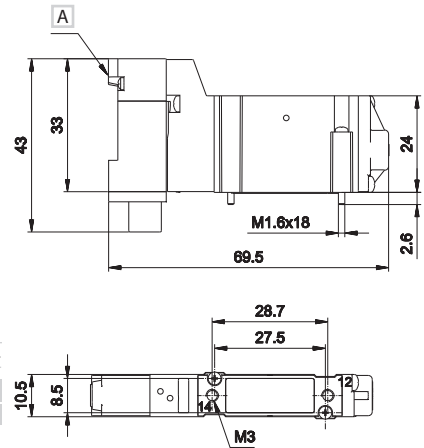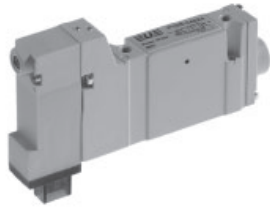



Weight (Kg): 0,054

	Symbol	Control	Return	Pressure	Resp. Time (ms)		Part no.
					En.	De-en.	
5/2		14	12	bar	12	20	P10B24024 P10B26024
5/2		14	12	bar	10	21	P10B24124 P10B26124

A Manual override

14 = Control
12 = Return

Double electric impulse

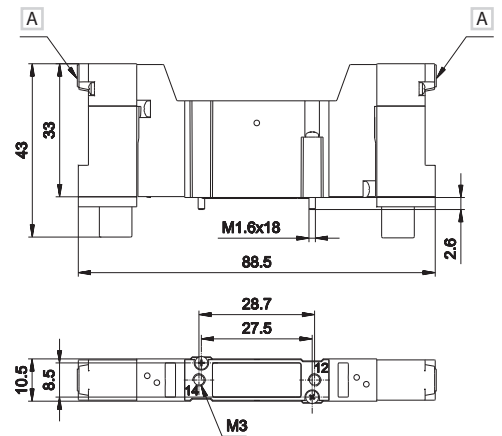

Weight (Kg): 0,069

	Symbol	Control	Return	Pressure	Resp. Time (ms)		Part no.
					En.	De-en.	
5/2		14	12	bar	10	10	P10B24424 P10B26624
5/3 c.c.		14	12	bar	11	22	P10B34424 P10B36624
5/3 o.c.		14	12	bar	11	22	P10B44424 P10B46624
5/3 p.c.		14	12	bar	11	22	P10B54424 P10B56624
3/2 NC + 3/2 NC		14	12	bar	9	14	P10B64424 P10B66624
3/2 NC + 3/2 NO		14	12	bar	9	14	P10B74424 P10B76624
3/2 NO + 3/2 NO		14	12	bar	9	14	P10B84424 P10B86624

A Manual override

14 = Control
12 = Return

o.c. = open centres c.c. = closed centres p.c. = pressurized centres


3

Single pneumatic impulse



Weight (Kg): 0,042

	Symbol	Control	Return	Pressure bar	Resp. Time (ms)		Part no.
					En.	De-en.	
5/2		pneumatic amplified	pneumo mechanical spring	1,5÷9	8	14	P10B230
5/2		pneumatic amplified	mechanical spring	1,9÷9	7	16	P10B231

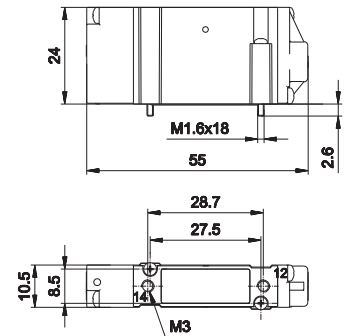


14 = Control
12 = Return

Double pneumatic impulse



Weight (Kg): 0,044



	Symbol	Control	Return	Pressure bar	Resp. Time (ms)		Part no.
					En.	De-en.	
5/2		pneumatic amplified	pneumatic amplified	0,6÷9	6	6	P10B233
5/3 c.c.		pneumatic amplified	pneumatic amplified	1,5÷9	7	20	P10B333
5/3 o.c.		pneumatic amplified	pneumatic amplified	1,5÷9	7	20	P10B433
5/3 p.c.		pneumatic amplified	pneumatic amplified	1,5÷9	7	20	P10B533
3/2 NC + 3/2 NC		pneumatic amplified	pneumatic amplified	1,3÷9	8	14	P10B633
3/2 NC + 3/2 NO		pneumatic amplified	pneumatic amplified	1,3÷9	8	14	P10B733
3/2 NO + 3/2 NO		pneumatic amplified	pneumatic amplified	1,3÷9	8	14	P10B833

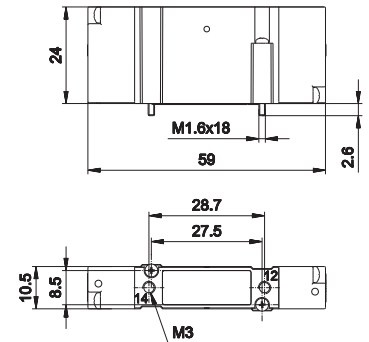



14 = Control
12 = Return

o.c. = open centres c.c. = closed centres p.c. = pressurized centres

Integrated electric connection

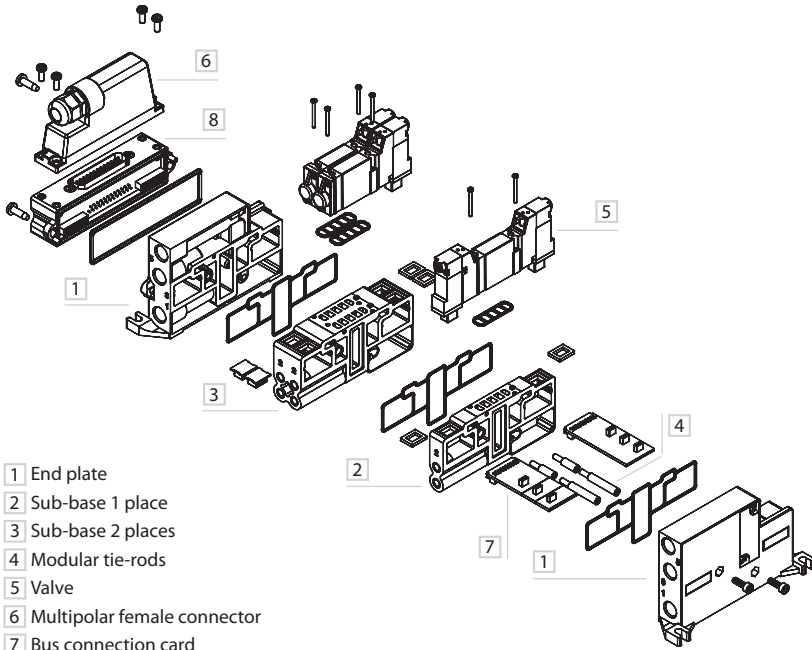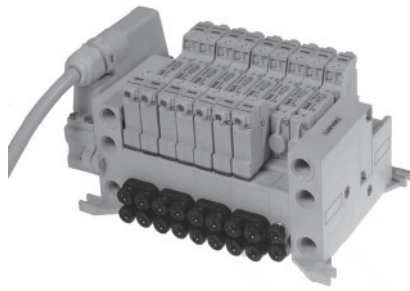


- 1 End plate
- 2 Sub-base 1 place
- 3 Sub-base 2 places
- 4 Modular tie-rods
- 5 Valve
- 6 Multipolar female connector
- 7 Bus connection card
- 8 Multipole connection module

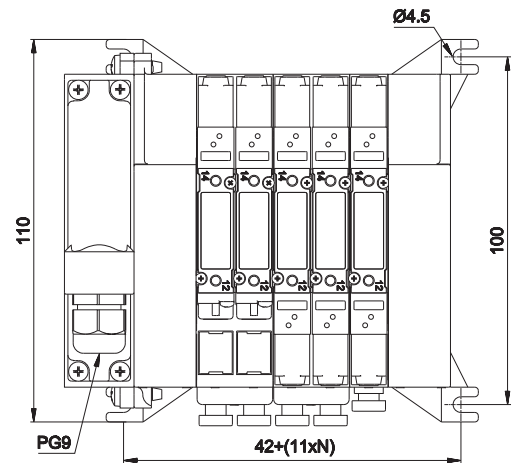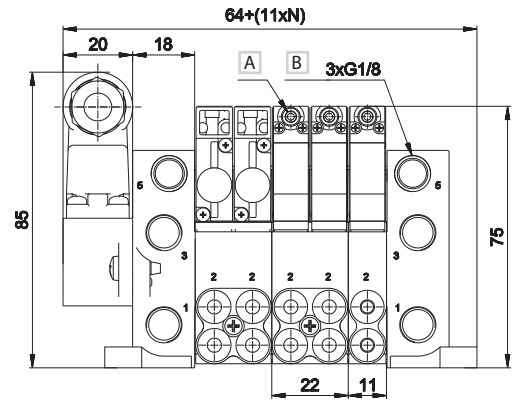

- 1 = Supply port
- 2 - 4 = Use
- 3 - 5 = Exhaust
- 14 = Control
- 12 = Return
- N = Number of valve places
- A Manual override
- B Tightening torque
- G1/8 - M5 = max 3 Nm
- M7 = 2 Nm

TIM1024 P10SB100/107 P10SB110/117 P10SB200/207 P10SB210/217 P10SB304 P10SB314

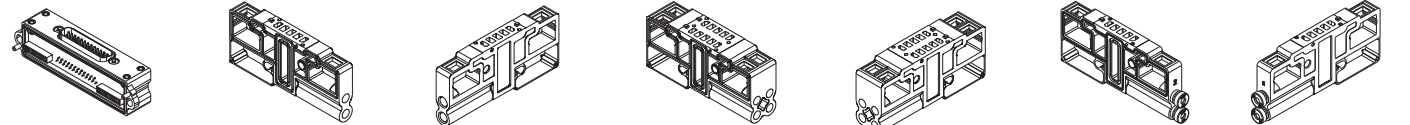

connection module 25 poles male type D-sub weight: 0,047 Kg

sub-base 1 place side outlets M5, M7 weight: 0,031 Kg

sub-base 1 place side outlets M5, M7 1-3-5 closed weight: 0,033 Kg


sub-base 2 places side outlets M5, M7 weight: 0,062 Kg

sub-base 2 places side outlets M5, M7 1-3-5 closed weight: 0,067 Kg

sub-base 1 place side outlets with quick couplings pipe 4 weight: 0,034 Kg

sub-base 1 place side outlets with quick couplings pipe 4 1-3-5 closed weight: 0,034 Kg

P10SB404 P10SB414 P10SB500 P10SB505 P10SB550 P10SB560 P10SB570

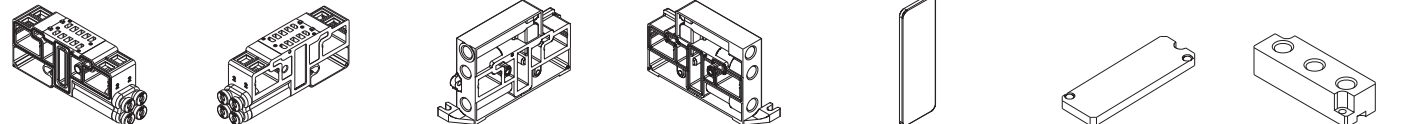

sub-base 2 places side outlets with quick couplings pipe 4 weight: 0,073 Kg

sub-base 1 place side outlets with quick couplings pipe 4 1-3-5 closed weight: 0,068 Kg

supply plate G1/8 left for TIM module weight: 0,074 Kg

supply plate G1/8 right weight: 0,074 Kg

supply pressure separator plate weight: 0,004 Kg

covering plate for unused valve place weight: 0,002 Kg

intermediate supply plate for sub-base weight: 0,007 Kg

P10SS14**M P10SS12**M P10STR01 P10STR02 P10STR05



bus connection card, side 14 ** = 04, 06, 08, 10, 12 places weight: 0,006 Kg

bus connection card, side 12 ** = 04, 06, 08, 10, 12 places weight: 0,006 Kg

modular tie-rods 1 valve place (package 100 pcs.) weight: 0,001 Kg


modular tie-rods 2 valve places (package 100 pcs.) weight: 0,003 Kg

modular tie-rods 5 valve places (package 100 pcs.) weight: 0,007 Kg

AZ4-SN003A
100 nuts for tie-rods


AZ4-VN0310
100 screws for tie-rods

D-535U40300
D-535U40500




■ single connector with cable 3-5 m

TSCFN24S000




■ female connector 25 poles type D-sub no cable M3 x 8 fixing screws

TSCFN24S0300
TSCFN24S0500
TSCFN24S1000



■ female connector 25 poles type sub-D cable 3-5-10 m M3 x 8 fixing screws

TSCFN16D0300
TSCFN16D0500
TSCFN16D1000

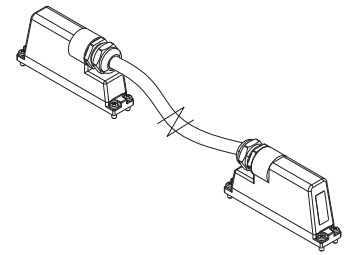

■ flying male/female connector sub D (upon request) prewired for 24 coils with cable Ø 8 mm (3-5-10 m length) suitable for mobile laying M3 x 8 fixing screws

➤ Colour identification according to standard DIN 47100

Female D-SUB 25 poles
for connection 12+12 coils



PIN No.	Colour	Coil	Control side	ValveN°
1	white	1	14	1
2	brown	2	12	1
3	green	3	14	2
4	yellow	4	12	2
5	grey	5	14	3
6	pink	6	12	3
7	blue	7	14	4
8	red	8	12	4
9	nero	9	14	5
10	black	10	12	5
11	grey-pink	11	14	6
12	red-blue	12	12	6
13	white-green	13	14	7
14	brown-green	14	12	7
15	white-yellow	15	14	8
16	yellow-brown	16	12	8
17	white-grey	17	14	9
18	grey-brown	18	12	9
19	white-pink	19	14	10
20	pink-brown	20	12	10
21	white-blue	21	14	11
22	brown-blue	22	12	11
23	white-red	23	14	12
24	brown-red brown-black shield	common low	-	-
25	white-black	24	12	12