


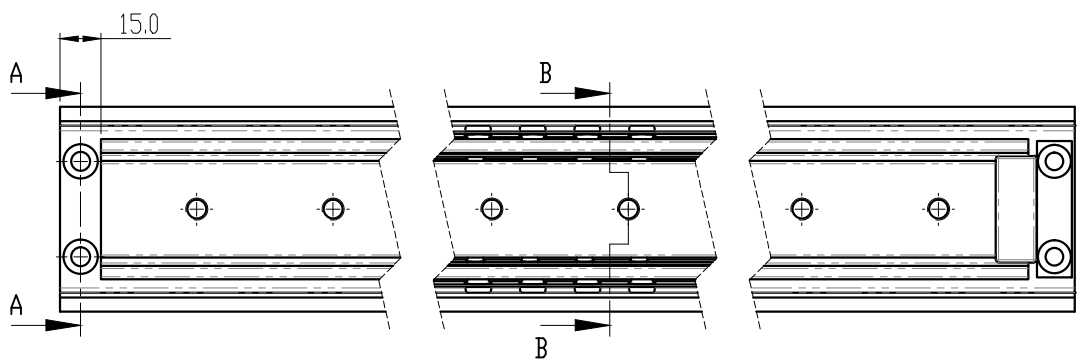
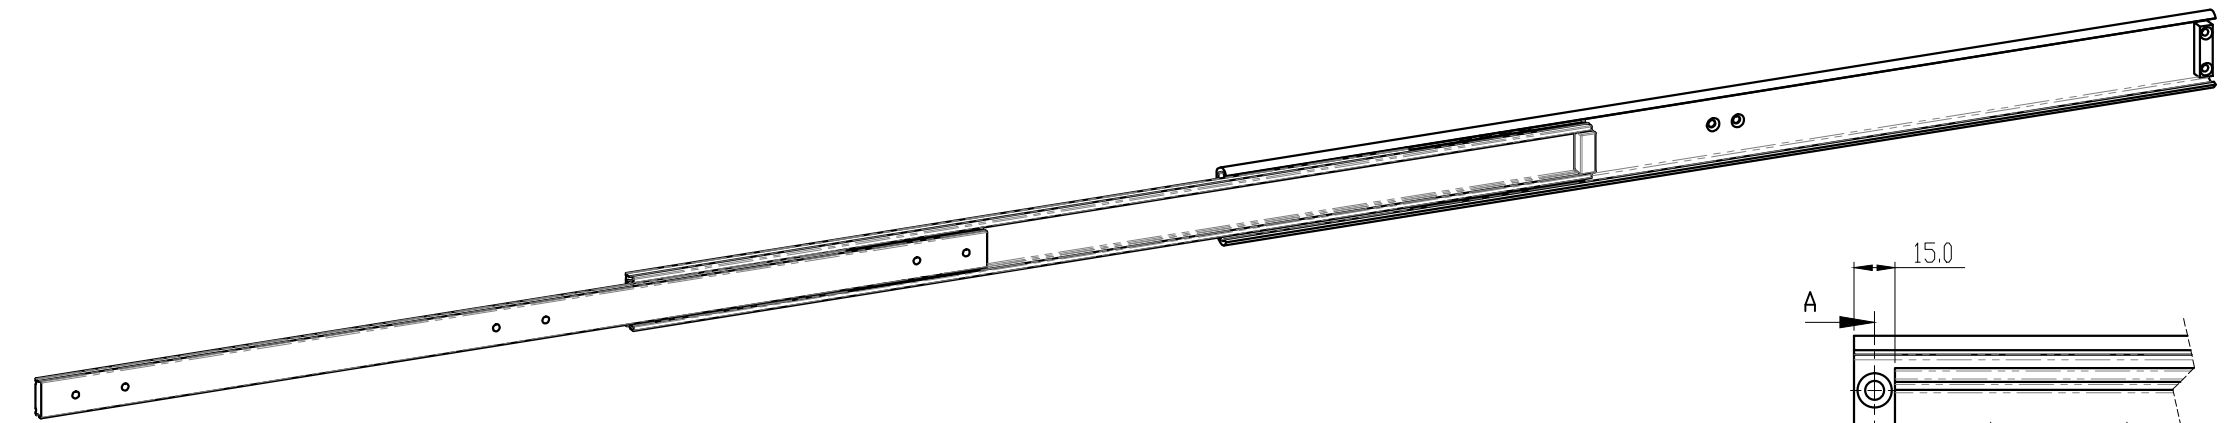
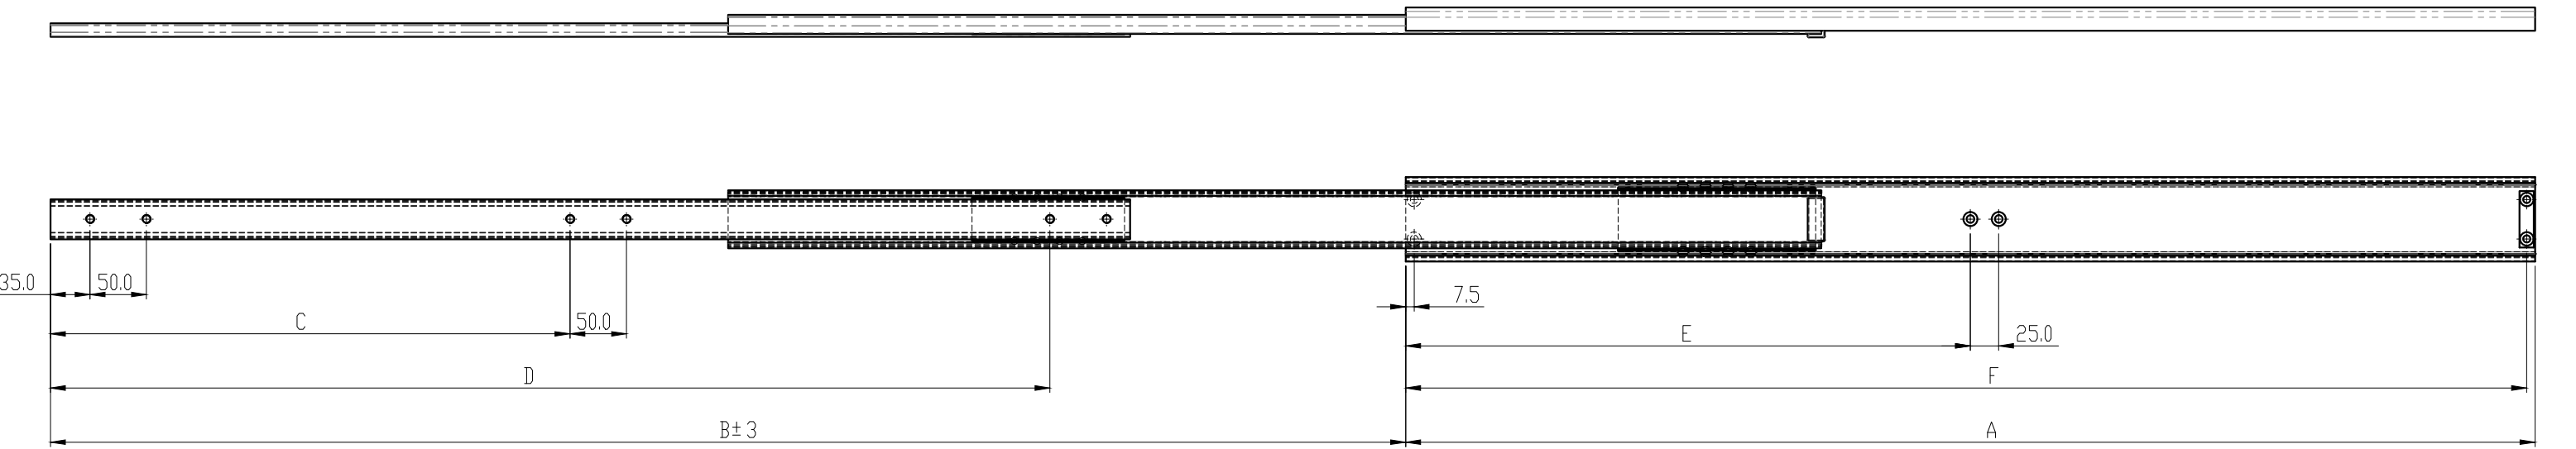





SECTION A-A
SCALE 1 : 1

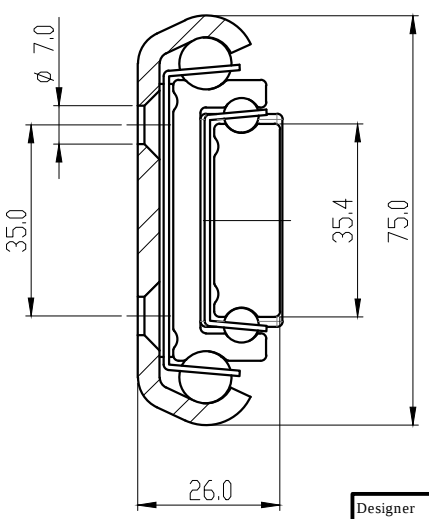

SECTION B-B
SCALE 1 : 1

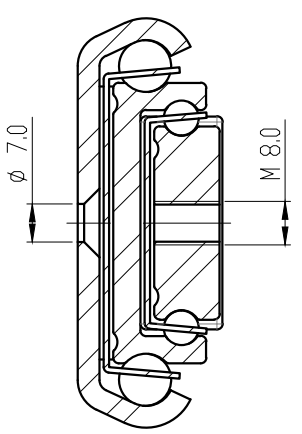

Configuration Table							
ART. NO	Installation Length "A"	Extension Length "B"	Load Per Pair (kg)	Drill Table			
				"C"	"D"	"E"	"F"
TR13875S31	300	360	324		185		292.5
TR13875S32	350	420	342		235		342.5
TR13875S33	400	480	351		285		392.5
TR13875S34	450	540	360		335		442.5
TR13875S35	500	600	369		285		492.5
TR13875S36	550	660	378	235	435	275	542.5
TR13875S37	600	720	387	260	485	300	592.5
TR13875S38	650	780	378	285	535	325	642.5
TR13875S39	700	840	369	310	585	350	692.5
TR13875S40	750	900	360	335	635	375	742.5
TR13875S41	800	960	351	360	685	400	792.5
TR13875S42	850	1020	342	385	735	425	842.5
TR13875S43	900	1080	333	410	785	450	892.5
TR13875S44	950	1140	324	435	835	475	942.5
TR13875S45	1000	1200	315	460	885	500	992.5
TR13875S47	1100	1320	288	510	985	550	1092.5
TR13875S49	1200	1440	270	560	1085	600	1192.5
TR13875S51	1300	1560	252	610	1185	650	1292.5
TR13875S53	1400	1680	234	660	1285	700	1392.5
TR13875S55	1500	1800	216	710	1385	750	1492.5

Designer	Gen.Tol.Dim. ± 0.5	Third angle projection 	Material MILD STEEL		
Date 16-09-2014	Gen.Tol.Angle ± 0.5		Treatment ZINCPLATE		
Approver	Gen.Roughness Ra		Draw type		Doc.No.
Date	Units mm/deg.		Scale	Type	Model No.
Description					
TR7526-120					
Format			Item No.		Revision
			TR7526-120		
© THOMAS REGOUT INTERNATIONAL BV, Industrieweg 40, 6219 NR, Maastricht, The Netherlands, +31 (0)43 351 66 66 All rights are reserved.					