



BBS/FKK

BALL VALVE WITH FLANGES,
SHORT PATTERN

DN 250-300 | PN 10-25

FULL BORE

MATERIALS


MATERIALS	PN	DN	Type 1	Type 2
Body	10-25	250-300	Steel	Steel
Ball	10-25	250-300	Ductile iron, hard chromed	Ductile iron, hard chromed
Sealings	10-25	250-300	NBR	PTFE

INFORMATION

- Ball Valve with flanges
- /// Length face-to-face DIN EN 558 FTF 28
- /// Flange dimensions DIN EN 1092-1, Form B1
- /// TÜV-type approval
- /// Scope of delivery without switch handle; on request with worm gear, pneumatic or electrical or electric drive available.

OPTIONS

- /// Other shapes of flange sealing surfaces on request
- /// Special designs on request

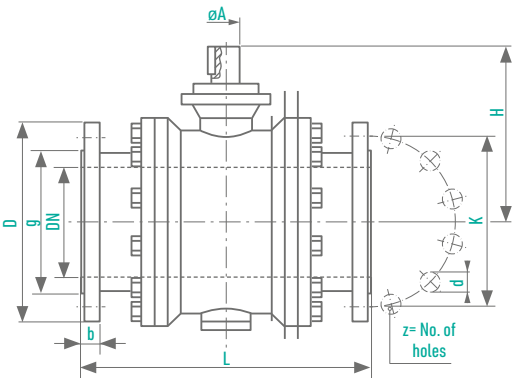

													Order-Number	
	DN	PN	L	D	g	K	b	z	d	H1	eA	Wght	Type 1	Type 2
PN 10 Raised face	250	10	650	395	320	350	26	12	22	385	60	230	0156925	0156945
	300	10	750	445	370	400	26	12	22	427	60	420	0156927	0156947
PN 16 Raised face	250	16	650	405	320	355	26	12	26	385	60	240	0156930	0156950
	300	16	750	460	378	410	28	12	26	427	60	430	0156932	0156952
PN 25 Raised face	250	25	650	425	335	370	32	12	30	385	60	255	0156935	0156955
	300	25	750	485	395	430	34	16	30	427	60	445	0156937	0156957