


Eyelet clamps with bayonet connection



Eyelet clamps with bayonet quick-release system


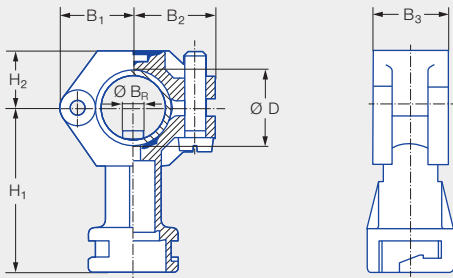


Series	Ordering no.					Screw (material)	Pipe Ø	Dimensions [mm]								Weight [g] (Polyamide)
	Type	Mat. no.			Code											
		51 Black	53 White	5E Blue												
		Poly- amide	Polypro- pylene	PVDF												
							B ₁	B ₂	B ₃	H ₁	H ₂	Ø B _R ¹	Ø B ²	Ø D		
226/2TR/ 302 bayonet/ 422 bayonet/ 468/652/646/ 684/679	090.003	●	●	●	KA	Stainless steel 304	1/2"	21.2	23.8	18.5	49.5	16.5	6.0	6.2–6.4	20.0–22.0	22.0
	090.013	●	●	●	KA		3/4"	24.5	26.5	22.0	52.5	17.5	7.6	7.8–8.0	25.0–27.5	26.0
	090.023	●	●	●	KA		1"	30.0	31.0	22.0	57.0	21.0	10.6	10.8–11.0	32.0–34.5	32.0

¹ Ø B_R = spigot diameter.

² Ø B = recommended bore diameter.

Diaphragm non-return valve with bayonet quick-release system



Series	Ordering no.			Screw (material)	Pipe Ø	Ø D [mm]	Pressure [bar]		Dimensions [mm]				Weight [g]
	Type	Mat. no.	Code				Opening pressure	Closing pressure	H ₁	H ₂	Ø B _R ¹	Ø B ²	
		56 Black											
		POM											
226/2TR/ 302 bayonet/ 422 bayonet/ 468/652/646/ 684/679	065.272	●	KH	Stainless steel 303	1/2"	20.0–22.0	0.8	0.6	59.0	84.0	6.0	6.2–6.4	48.0
	065.272	●	KL		3/4"	25.0–27.5	0.8	0.6	66.0	90.0	9.6	9.8–10.0	53.0

¹ Ø B_R = spigot diameter.

² Ø B = recommended bore diameter.



Material	Max. temperature [°C]	Max. pressure [bar]
PA, PP, PVDF, POM	65	10
PA, PP, PVDF, POM	80	8
PVDF	100	4

Notice: Please consider the material combination when using bayonet eyelet clamps with bayonet quick-release system nuts. The nuts may be difficult to turn when using different materials.

Accessories
for bayonet system



Bayonet welded nipple




Twist angle to the right in relation to the pipe axis. Twist angle 10°. Other twist angles available on request.

Series	Ordering no.		Mat. no.		Dimensions [mm]		Weight [g]
			50	53			
	Type		PVC	Polypropylene	L	R	
226/2TR/302 bayonet/ 422 bayonet/468/ 652/646/684/679	095.016.xx.08.05 ¹		●	●	25.0	16.0	10.0

¹ Replace "xx" with the desired material no.

Strainer with gasket


Suitable for bayonet quick-release system
nuts 065.202



Performance size	Ordering no.		Colour	Dimensions [mm]					Weight [g]
	Type	Mat. no.		Mesh size	H ₁	H ₂	Ø D ₁	Ø D ₂	
		7J							
		POM/Santoprene							
xxx.32x-xxx.44x	065.268	●	Blue	0.25	19.20	3.00	18.00	12.00	2.00
xxx.48x-xxx.56x	065.269	●	Red	0.65	19.20	3.00	18.00	12.00	2.00

Bayonet
quick-release system nuts


Incl. gasket 065.242.73
(material: Rubber)



Series	Ordering no.				Colour	Weight [g]
	Type	Mat. no.				
		POM	Polypropylene	PVDF		
652/679	065.202.56.00	●			Red	10.0
	065.202.53.00		●		Grey	10.0
	065.202.5E.00			●	Blue	10.0

Bayonet
quick-release system nuts

Incl. gasket 065.242.73
(material: Rubber)



Series	Ordering no.		Colour	Weight [g]
	Type	Mat. no. POM Polypropylene		
226/2TR/ 468/684	065.202.56.11	●	Black	10.0
	065.202.53.11	●	Grey	10.0

Notice: Please consider the material combination when using bayonet eyelet clamps with bayonet quick-release system nuts. The nuts may be difficult to turn when using different materials.






Ball joints for bayonet quick-release system

Ball joint system for nozzles with 1/8" and 1/4" male thread.


Ball joint for eyelet clamps with bayonet quick-release system




For all nozzles with 1/8" or 1/4" male thread	Ordering no.				Colour	Weight [g]
	Type	Mat. no.	Code			
		PVDF	1/8 BSPP	1/4 BSPP		
Ball joint	092.150	5E	AB	AD	Blue	5.0

Bayonet quick-release system nut for ball joint

Incl. O-ring
Ordering no. 095.015.7C.04.16.0
(material: 72 NBR 872)



For all nozzles with 1/8" or 1/4" male thread	Ordering no.		Colour	Weight [g]
	Type	Mat. no.		
		PVDF		
Quick-release system nut	092.150.5E.00	●	Blue	28.0

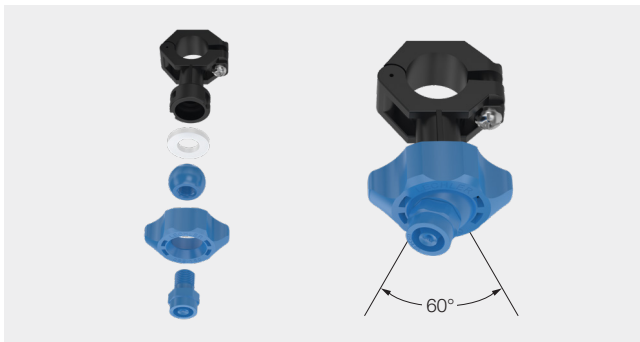

Max. temperature [°C]	Max. pressure [bar]
65	10
80	8
100	4

Ordering	Type	+	Material no.	+	Code	=	Ordering no.
example:	092.150	+	5E	+	AB	=	092.150.5E.AB